



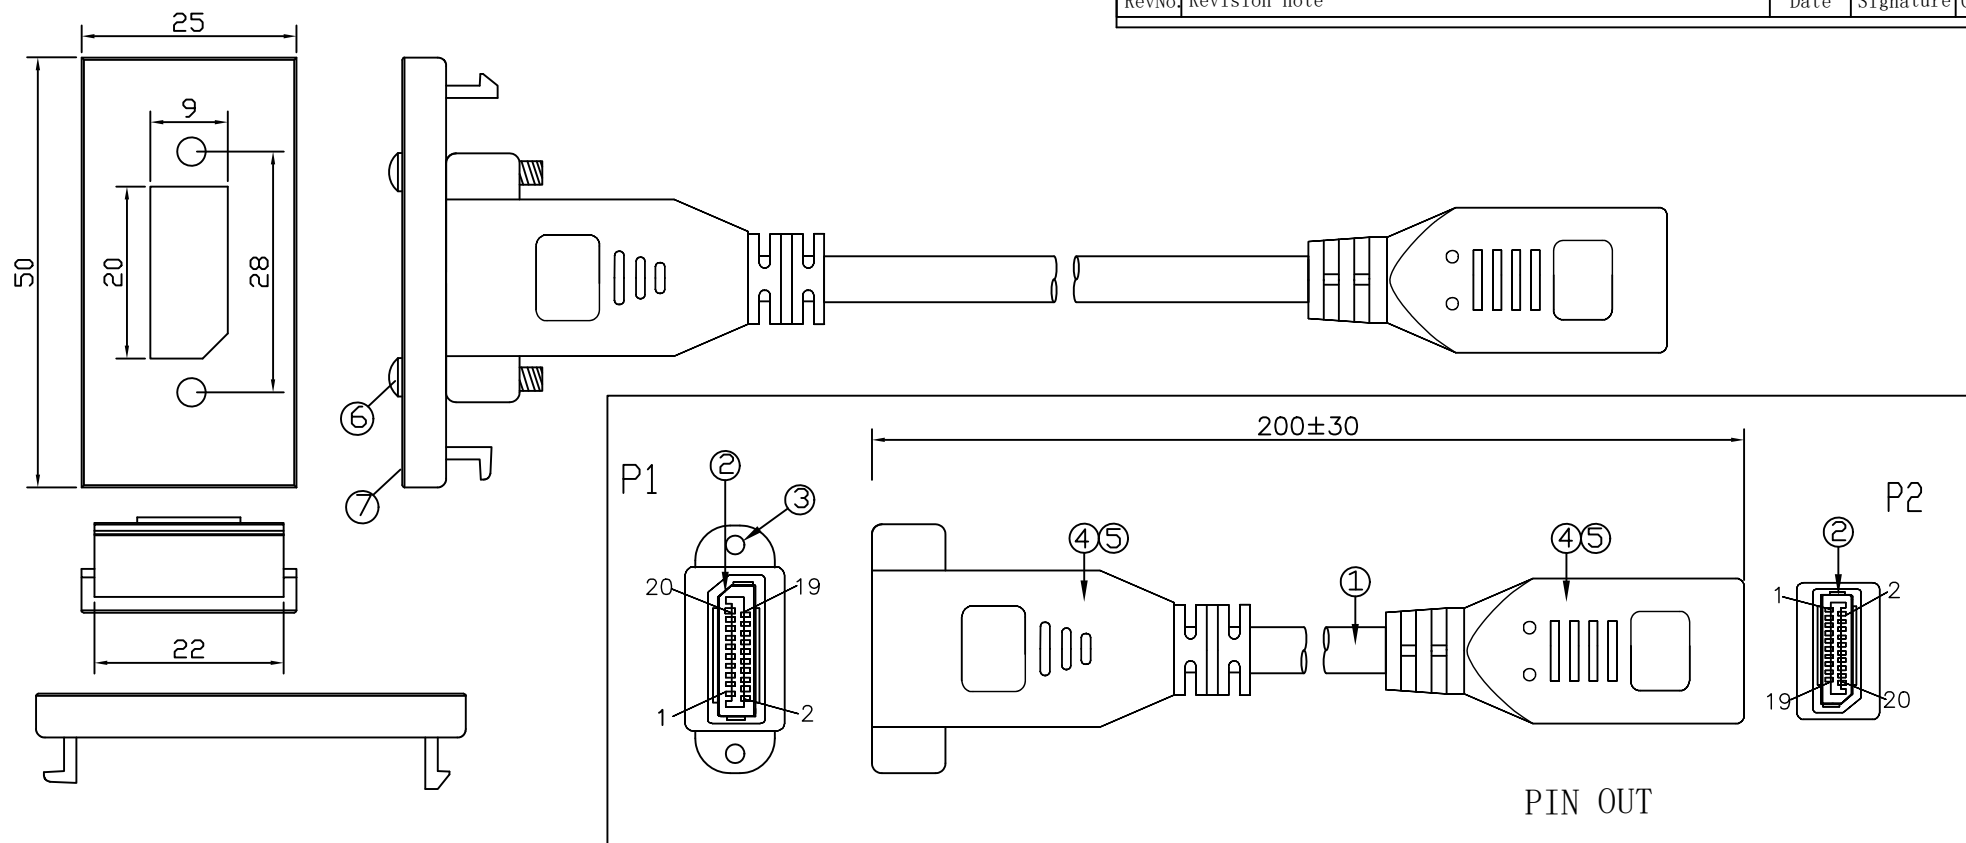

NOTES:

1. Open/Short/Intermittence: 100%
2. Insulation Resistance: 10MΩ Min
3. Conductive Resistance: 5Ω Max
4. HD-TV : 4K*2K@60Hz
5. RoHS & REACH COMPLIANT

PIN OUT

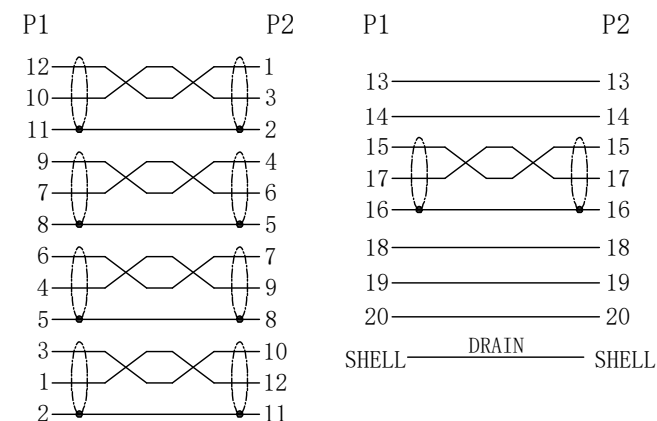

⑦	PANEL	ABS PANEL FOR DP/F, 50*25mm, Color:RAL9003	1	PCS
⑥	SCREW	THUMB SCREW #4-40*15	2	PCS
⑤	MOLDED	45P BLACK PVC		G
④	MOLDED	LDPE		G
③	NUT	NUT-NICKEL PLATED #4-40	2	PCS
②	CONNECTOR	DP/F (BLACK COVER), GOLD PLATED PIN, BLACK INSULATION, NICKEL PLATED SHELL	2	PCS
①	CABLE	(7/0.12TC*1P+D+FAM)*5C+7/0.12TC*5C+ADB, JACKET:BLACK PVC, OD:4.8±0.2MM MARKING:DisplayPort Cable E***** 9A AWM STYLE 20276 80°C 30V VW-1	200	MM
NO.	MATERIAL	DESCRIPTION	QTY.	UNIT

Ltemref	Quantity	Title/Name, designation, material, dimension etc			Article NO./Reference		
Designed by FLY	Checkde by HELEN	Approved by - date 2025.12.30	File name	Date 2025.12.30	Scale FREE		
ANGLE: 				Faceplate & Cable			
UNIT:MM				20-0014		Edition 1	Sheet 1/1