







①

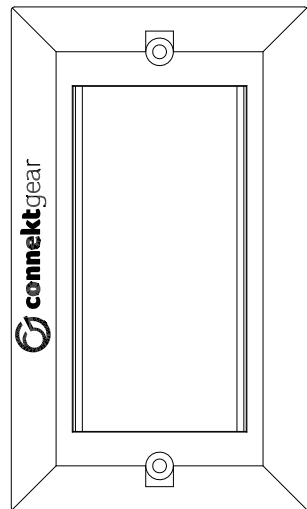


②

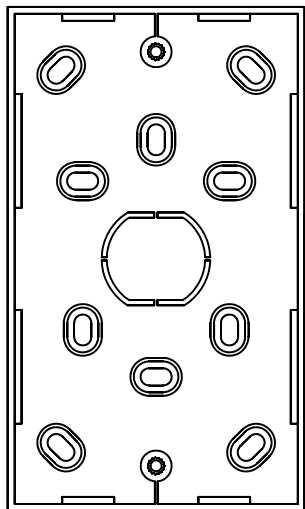


①

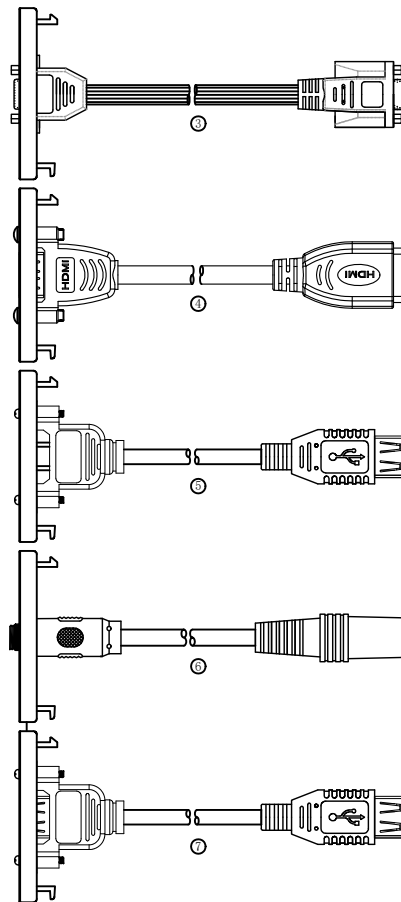


③




④



⑤




⑥



⑦

⑫	20-1050-3	USB2.0 AM/AF+IC 5M	1	PCS
⑪	20-1050-5	3.5MM M/M 5M	1	PCS
⑩	20-1050-4	USB2.0 AM/BM 1M	1	PCS
⑨	20-1050-2	HDMI2.0 AM/AM 5M	1	PCS
⑧	20-1050-1	VGA (3+9) M/M 5M	1	PCS
⑦	20-1050-9-1/2	USB2.0 AF/AF 0.35M	1	PCS
⑥	20-1050-10-1/2	3.5MM F/F 0.35M	1	PCS
⑤	20-1050-12-1/2	USB2.0 AF/BF 0.35M	1	PCS
④	20-1050-8-1/2	HDMI2.0 AF/AF 0.3M	1	PCS
③	20-1050-11-1/2	VGA (3+9) F/F 0.35M	1	PCS
②	20-1050-7	BACK BOX 146*86*42MM	1	PCS
①	20-1050-6/GG	FACE PLATE 146*86MM	1	PCS
NO.	MATERIAL	DESCRIPTION	QTY.	UNIT

Ltemref	Quantity	Title/Name, designation, material, dimension etc			Article NO./Reference		
Designed by FLY		Checkde by HELEN	Approved by - date 2025. 10. 20	File name	Date 2025. 10. 20	Scale FREE	
ANGLE:					20-1050		
UNIT:MM						Edition 1	Sheet 1/13

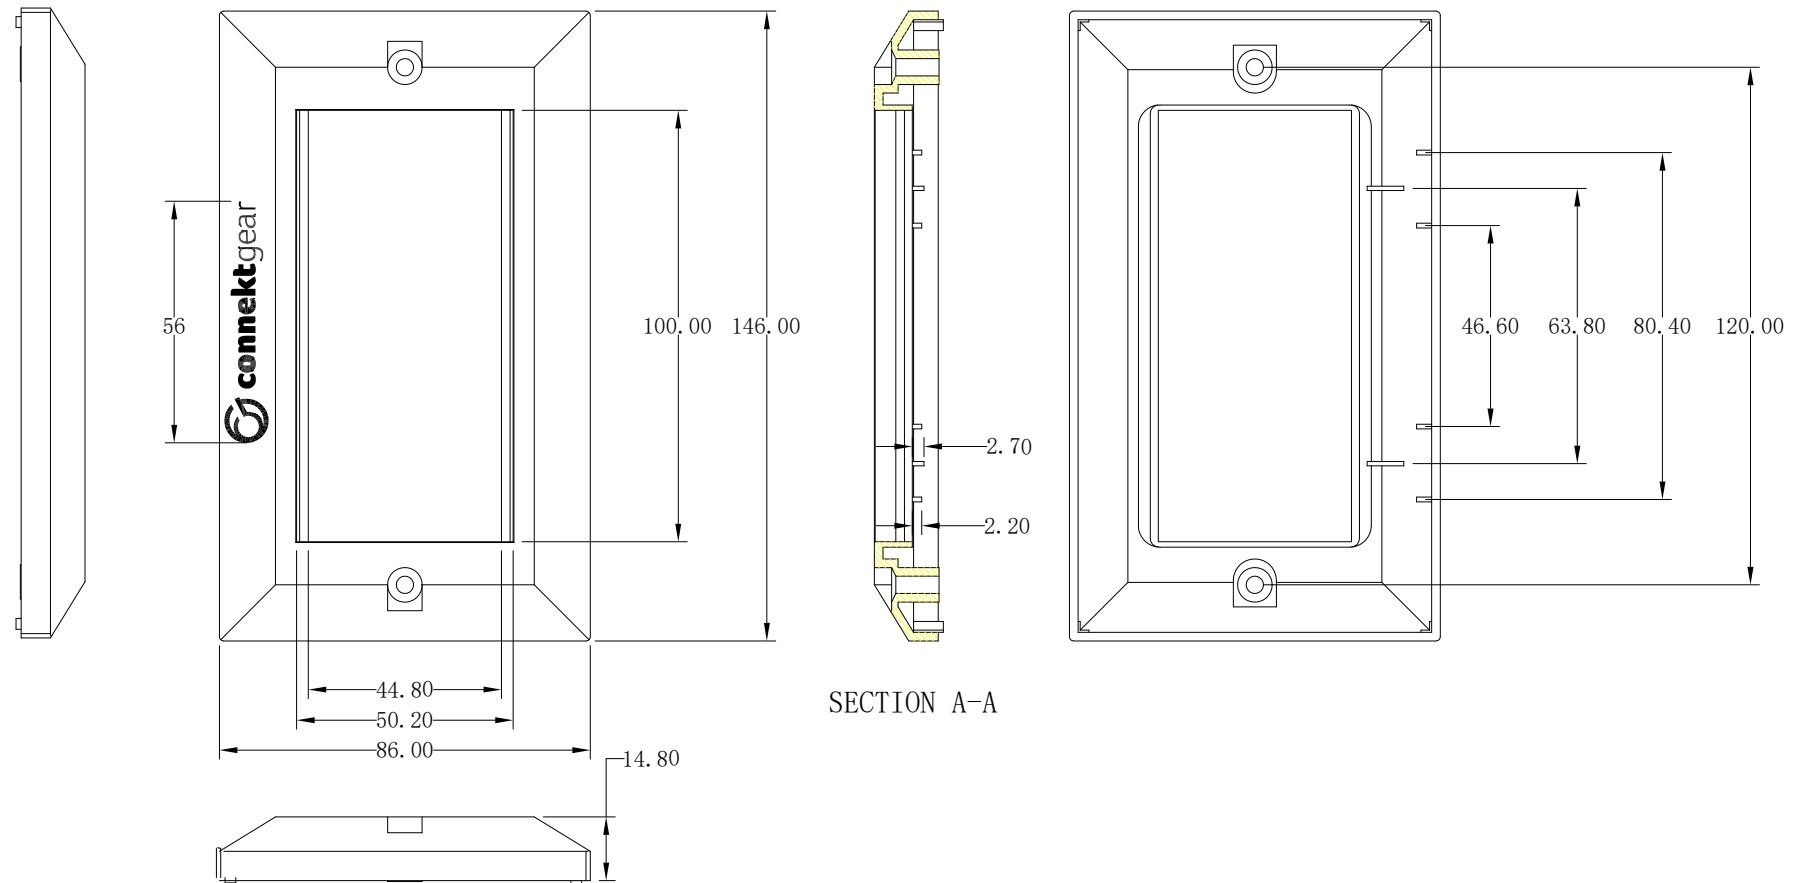


SECTION A-A

NOTES:

1. MATERIAL:ABS
2. BURR:0.05mm MAX
3. FACE PLATE COLOR:RAL9003
4. RoHS & REACH Compliant.

Ltemref	Quantity	Title/Name, designation, material, dimension etc			Article NO./Reference	
Designed by FLY		Checkde by HELEN	Approved by - date 2025. 10. 20	File name	Date 2025. 10. 20	Scale FREE
ANGLE: 					20-1050-6/GG	
UNIT:MM						Edition 1



①	FACE PLATE	DOUBLE GANG FACE PLATE 86*86*14.8	1	PCS
NO.	MATERIAL	DESCRIPTION	QTY.	UNIT

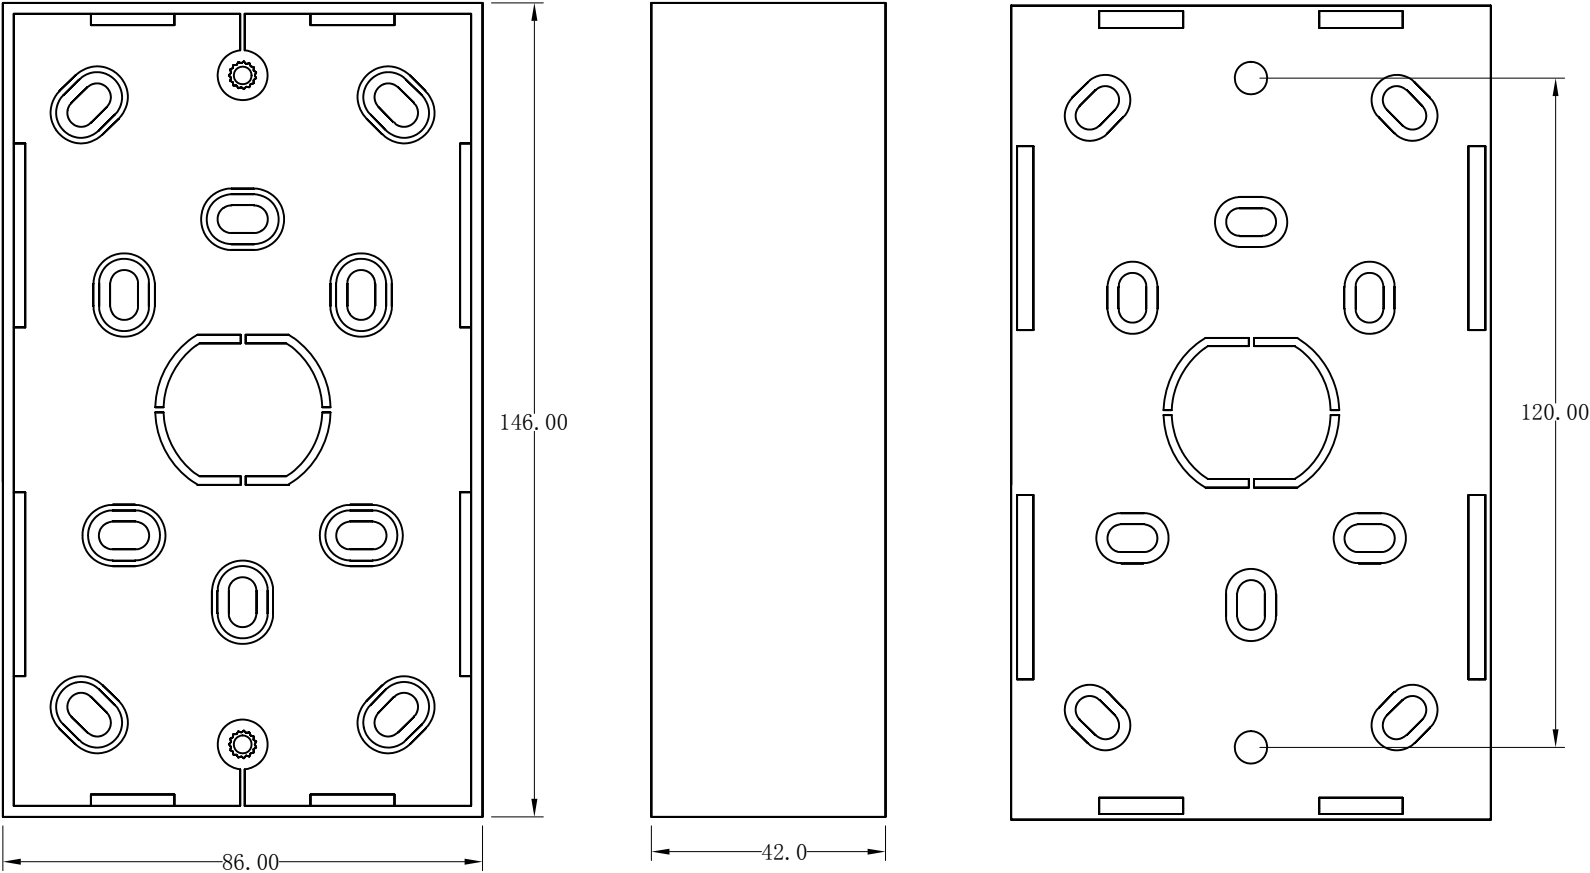


- NOTES:
- 1. MATERIAL:ABS
 - 2. BURR:0.05mm MAX
 - 3. FACE PLATE COLOR:RAL9003
 - 4. RoHS & REACH Compliant.

Ltemref	Quantity	Title/Name, designation, material, dimension etc			Article NO./Reference	
Designed by FLY	Checkde by HELEN	Approved by - date 2024. 10. 22	File name	Date 2024. 10. 22	Scale FREE	
ANGLE: 				20-1050-7		
UNIT:MM					Edition 1	Sheet 3/13


①	BACK BOX	DOUBLE GANG BACK BOX 86*86*42	1	PCS
NO.	MATERIAL	DESCRIPTION	QTY.	UNIT

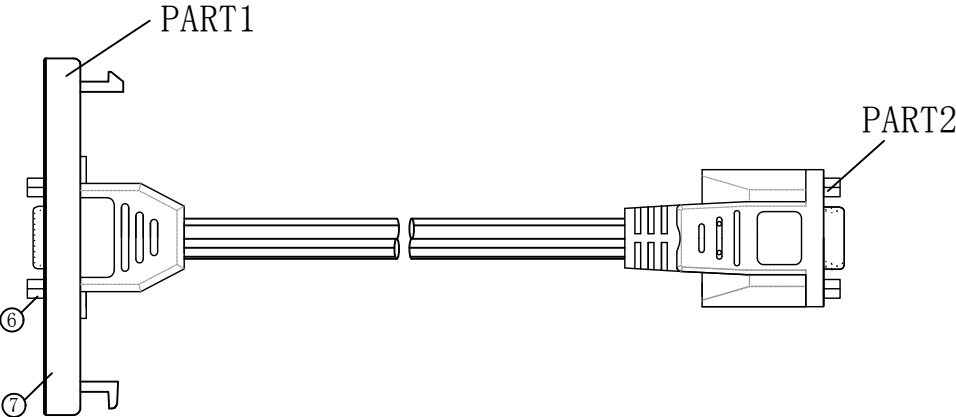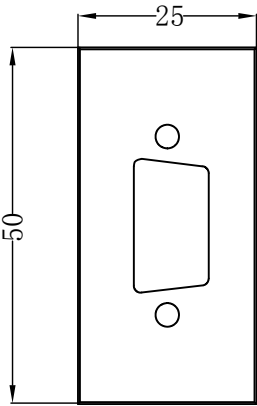

NOTES:
1:Open/Short/Intermittence: 100%.
2:RoHS & REACH Compliant.
3:Face plate color:RAL9003

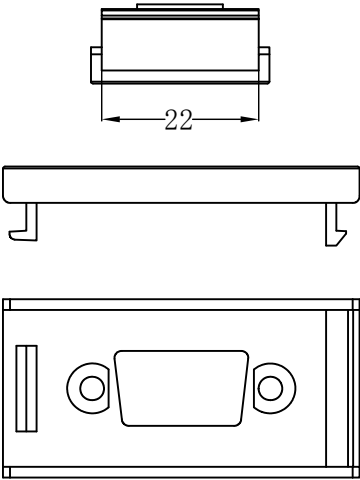

PART1


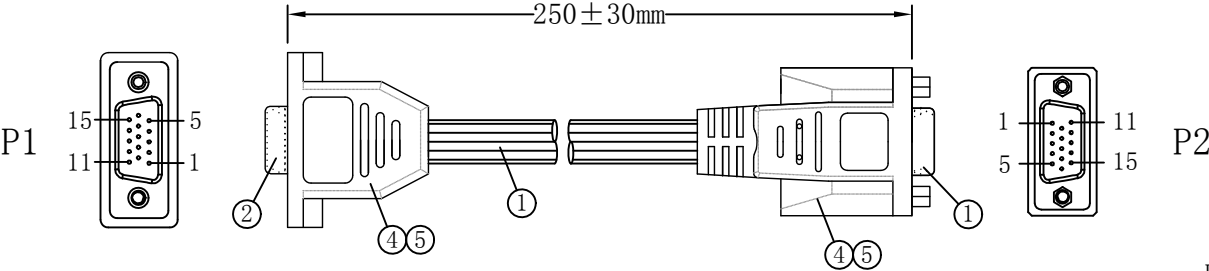


PART2


PIN OUT			
P1	P2	P1	P2
1	1	9	9
2	2	10	10
3	3	11	11
4	4	12	12
5	5	13	13
6	6	14	14
7	7	15	15
8	8	SHELL	DRAIN SHELL

⑦	PANEL	PANEL FOR VGA AF, 50*25MM, COLOR:RAL9003	1	PCS
⑥	SCREW	THUMB SCREW #4-40*15	2	PCS
⑤	MOLDED	45P BLACK PVC		G
④	MOLDED	LDPE		G
③	CONNECTOR	VGA15/F+AFTER RIVET NUT, GOLD PLATED PIN, BLUE INSULATION, GOLD PLATED SHELL	1	PCS
②	CONNECTOR	VGA15/F+FRONT RIVET NUT, GOLD PLATED PIN, BLUE INSULATION, GOLD PLATED SHELL	1	PCS
①	CABLE	[7/0. 12BC*1C+FPE+D(7/0. 12BC)+AL+PVC]*3C+7/0. 12BC*9C+AL+D(7/0. 12BC)+B(80/0. 12ALM), BLACK PVC DENTATE JACKET OD:8. 0±0. 2mm	350	MM
NO.	MATERIAL	DESCRIPTION	QTY.	UNIT


Ltemref	Quantity	Title/Name, designation, material, dimension etc			Article NO. /Reference		
Designed by FLY	Checkde by HELEN	Approved by - date 2024. 10. 22	File name	Date 2024. 10. 22	Scale FREE		
ANGLE: 				20-1050-11-1/2			
UNIT:MM					Edition 1	Sheet 4/13	

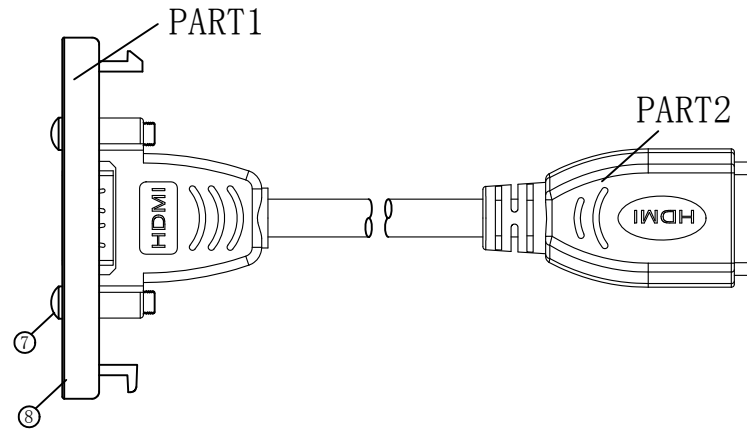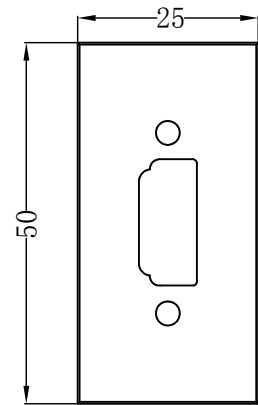

NOTES:
1:100% short,open and miss wire test.
2:Resolution: 4K*2K@60Hz 4:4:4
3.RoHS & REACH Compliant.
4:Face plate color:RAL9003

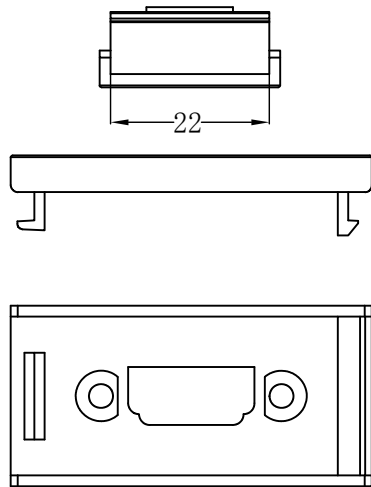


PART1

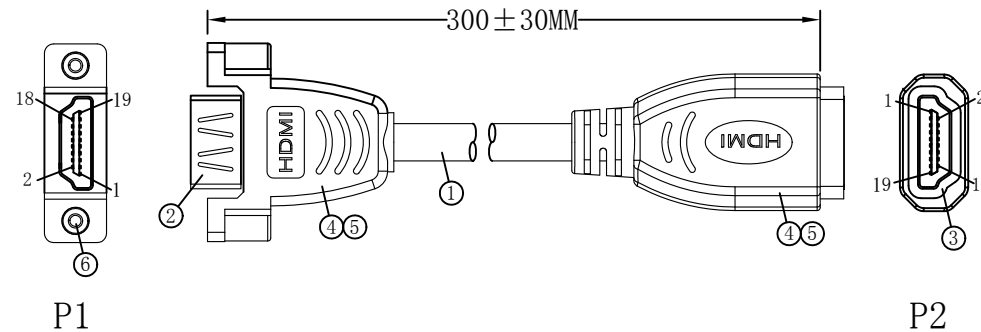



PART2

PIN OUT

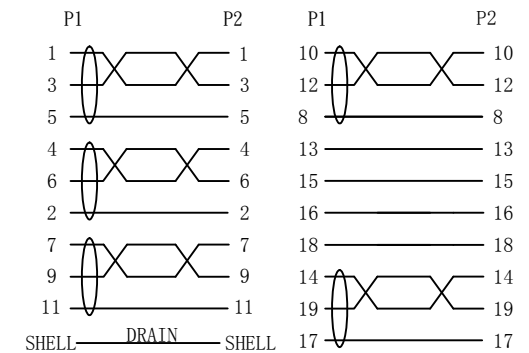


⑧	PANEL	ABS PANEL FOR HDMI AF, 50*25mm, Color:RAL9003	1	PCS
⑦	SCREW	PHILIPS SCREW #4-40 UNC NICKEL PLATED L=12MM	2	PCS
⑥	NUT	EMBEDD NUT #4-40 UNC NICKEL PLATED L=10MM	2	PCS
⑤	MOLDING	45P BLACK PVC		G
④	MOLDING	LDPE MG70	1	PCS
③	CONNECTOR	HDMI FEMALE, GOLD PLATED PIN, BLACK INSULATION, GOLD PLATED SHELL+BLACK SHEATH	1	PCS
②	CONNECTOR	HDMI FEMALE, GOLD PLATED PIN, BLACK INSULATION, GOLD PLATED SHELL	1	PCS
①	CABLE	[1P*7/0. 12BC)+D(7/0. 12BC)+FAM]*5C+(7/0. 12BC)*4C+AL-FOIL+D(7/0. 12BC)+B(80/0. 12ALM), BLACK PVC JACKET, OD:7. 3±0. 2mm	300	MM
NO.	MATERIAL	DESCRIPTION	QTY.	UNIT


Ltemref	Quantity	Title/Name, designation, material, dimension etc			Article NO. /Reference		
Designed by FLY		Checkde by HELEN	Approved by - date 2024. 10. 22	File name	Date 2024. 10. 22	Scale FREE	
ANGLE: 					20-1050-8-1/2		
UNIT:MM							Edition 1

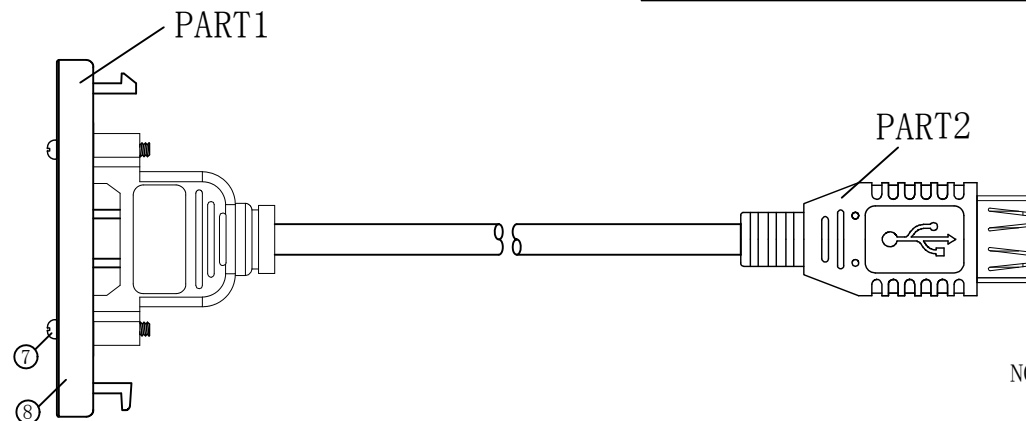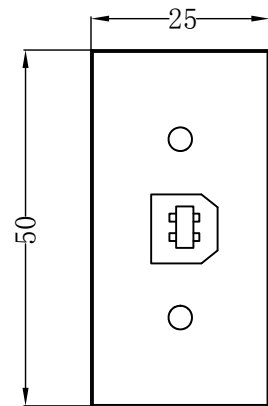

NOTES:
1:Open/Short/Intermittence: 100%.
2:RoHS & REACH Compliant.
3:Face plate color:RAL9003

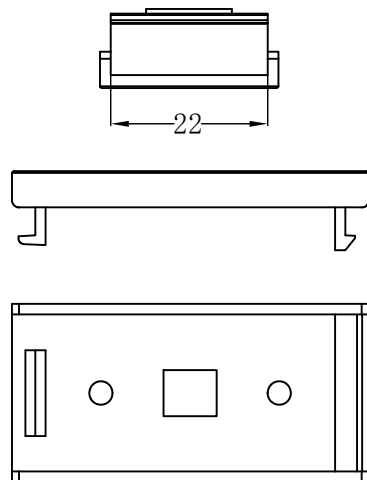


PART1

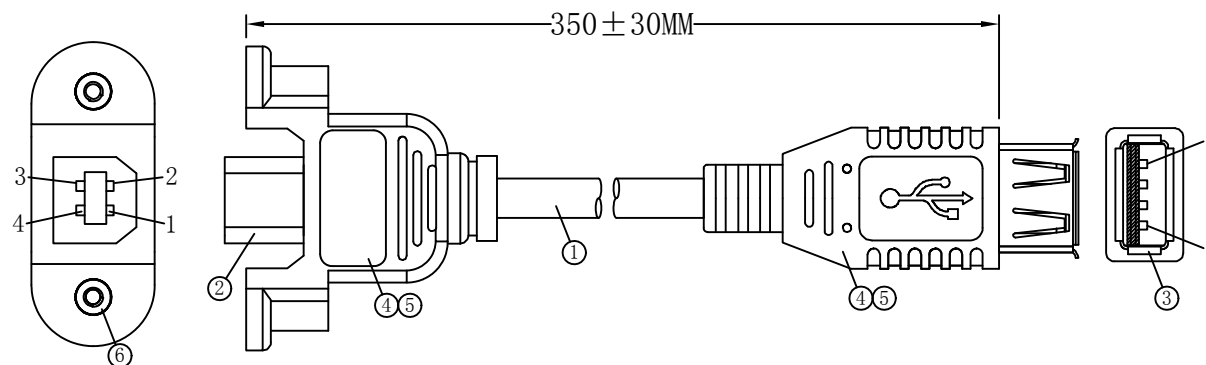



P1

PART2

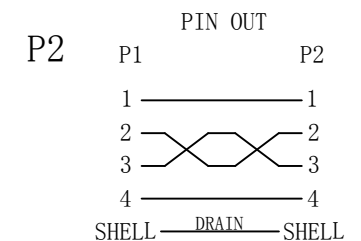


⑧	PANEL	PANEL FOR USB AF, 50*25MM, COLOR:RAL9003	1	PCS
⑦	SCREW	THUMB SCREW #4-40*15	2	PCS
⑥	EMBED NUT	NUT-NICKEL PLATED(#4-40)	2	PCS
⑤	MOLDED	45P BLACK PVC		G
④	MOLDED	LDPE		G
③	CONNECTOR	USB2.0 AF, GOLD PLATED PIN, WHITE INSULATION, NICKEL PLATED SHELL	1	PCS
②	CONNECTOR	USB2.0 BF, GOLD PLATED PIN, WHITE INSULATION, NICKEL PLATED SHELL	1	PCS
①	CABLE	7/0. 12BC*1P+7/0. 20BC*2C+AL-FOIL+D(1/0. 254BC)+B(64/0. 12AL-MG), BLACK PVC JACKET OD: 4. 8±0. 2mm	350	MM
NO.	MATERIAL	DESCRIPTION	QTY.	UNIT


Ltemref	Quantity	Title/Name, designation, material, dimension etc			Article NO./Reference		
Designed by FLY		Checkde by HELEN	Approved by - date 2024. 10. 22	File name	Date 2024. 10. 22	Scale FREE	
ANGLE: 					20-1050-12-1/2		
UNIT:MM							

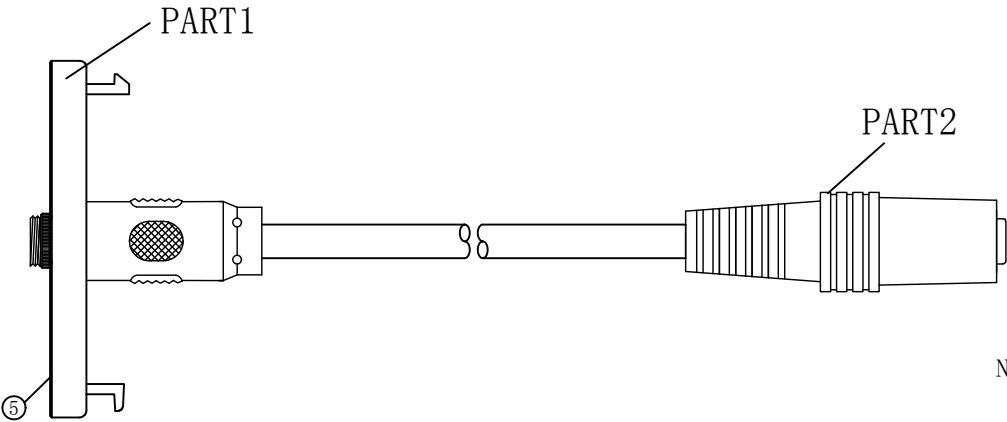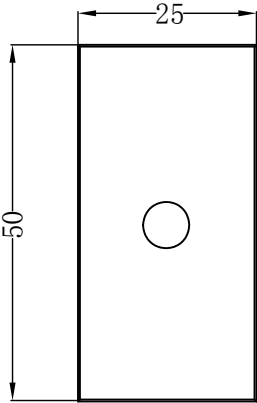

NOTES:
1:Open/Short/Intermittence: 100%.
2:RoHS & REACH Compliant.
3:Face plate color:RAL9003

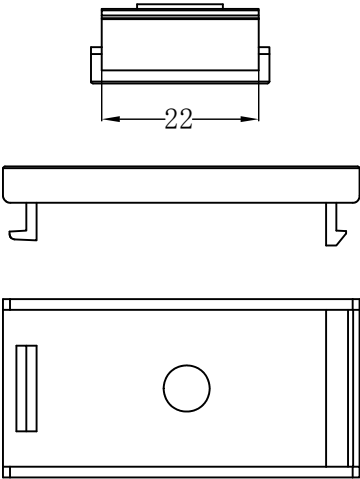



PART1

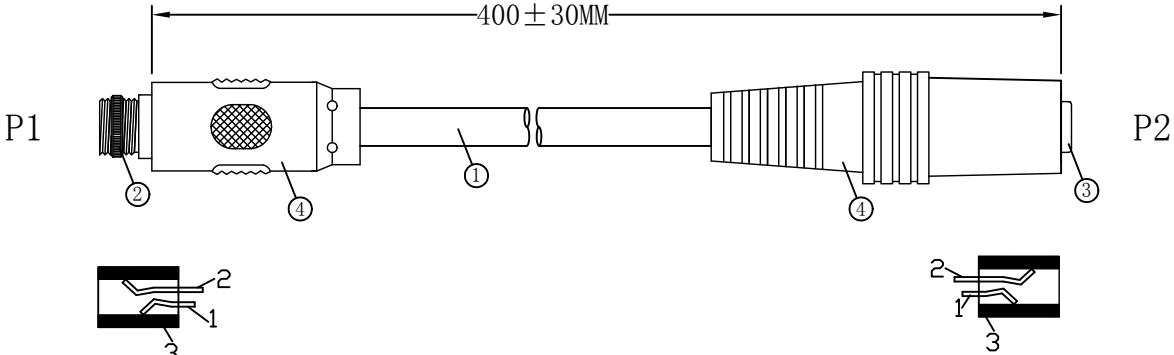


PART2

PIN OUT	
P1	P2
1	1
2	2
3	SPIRAL 3



⑤	PANEL	PANEL FOR DC3. 5, 50*25MM, COLOR:RAL9003	1	PCS	Ltemref	Quantity	Title/Name, designation, material, dimension etc			Article NO. /Reference		
④	MOLDED	45P BLACK PVC		G	Designed by	Checkde by	Approved by - date		File name	Date	Scale	
③	CONNECTOR	DC3. 5 STEREO FEMALE, NICKEL PLATED CONTACT	1	PCS	FLY	HELEN	2024. 10. 22			2024. 10. 22	FREE	
②	CONNECTOR	USB2. 0 AF, GOLD PLATED PIN, WHITE INSULATION, NICKEL PLATED SHELL	1	PCS	ANGLE:					20-1050-10-1/2		
①	CABLE	7/0. 12BC*2C+S (28*0. 1BC) , JACKET:BLACK PVC, OD:4. 0±0. 2mm	400	MM								
NO.	MATERIAL	DESCRIPTION	QTY.	UNIT	UNIT:MM						Edition 1	Sheet 7/13

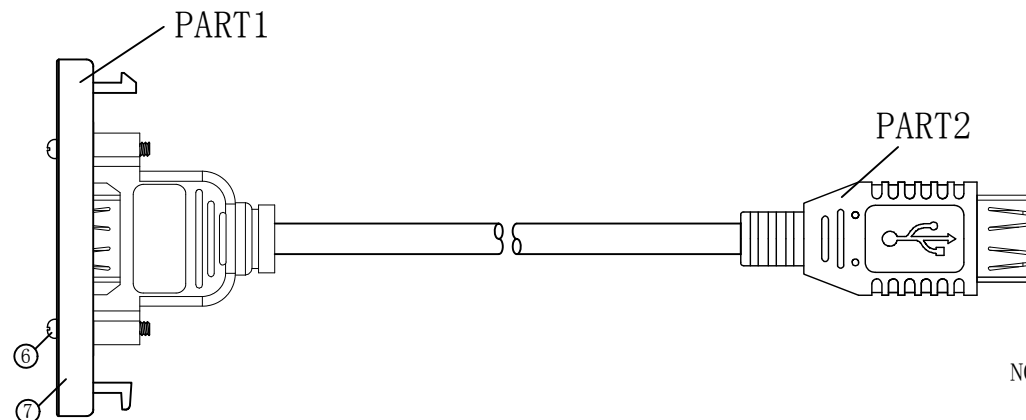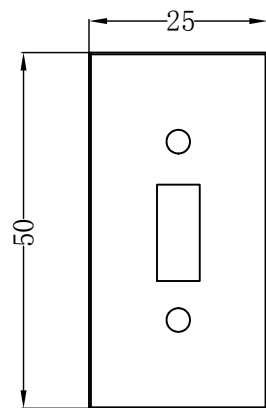

NOTES:
1:Open/Short/Intermittence: 100%.
2:RoHS & REACH Compliant.
3:Face plate color:RAL9003

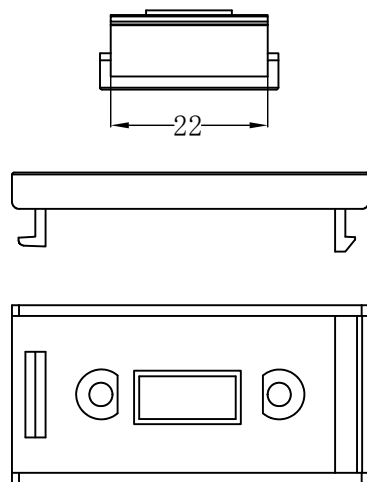


PART1

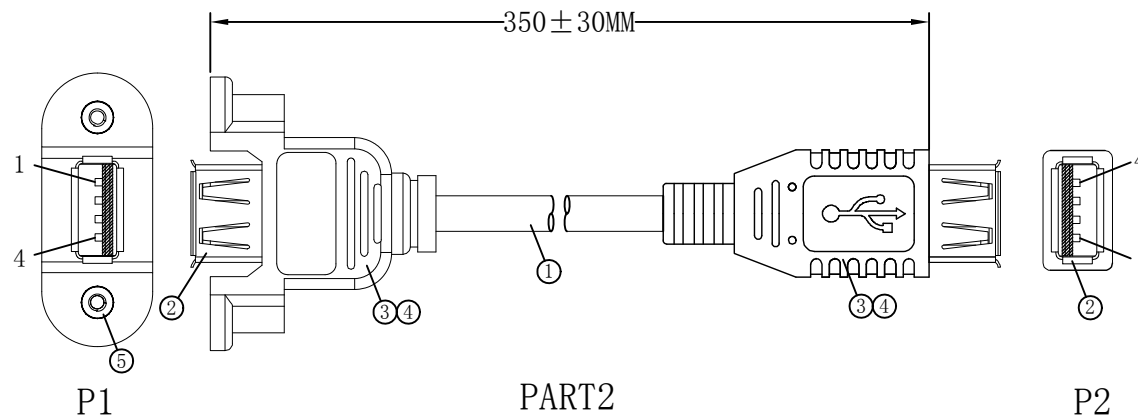

⑦	PANEL	PANEL FOR USB AF, 50*25MM, COLOR:RAL9003	1	PCS
⑥	SCREW	THUMB SCREW #4-40*15	2	PCS
⑤	EMBED NUT	NUT-NICKEL PLATED(#4-40)	2	PCS
④	MOLDED	45P BLACK PVC		G
③	MOLDED	LDPE		G
②	CONNECTOR	USB2.0 AF, GOLD PLATED PIN, WHITE INSULATION, NICKEL PLATED SHELL	2	PCS
①	CABLE	7/0.12BC*1P+7/0.20BC*2C+AL-FOIL+D(1/0.254BC)+B(64/0.12AL-MG), BLACK PVC JACKET OD:4.8±0.2mm	350	MM
NO.	MATERIAL	DESCRIPTION	QTY.	UNIT

Ltemref	Quantity	Title/Name, designation, material, dimension etc			Article NO./Reference		
Designed by FLY		Checkde by HELEN	Approved by - date 2024. 10. 22	File name	Date 2024. 10. 22	Scale FREE	
ANGLE: 					20-1050-9-1/2		
UNIT:MM						Edition 1	Sheet 8/13

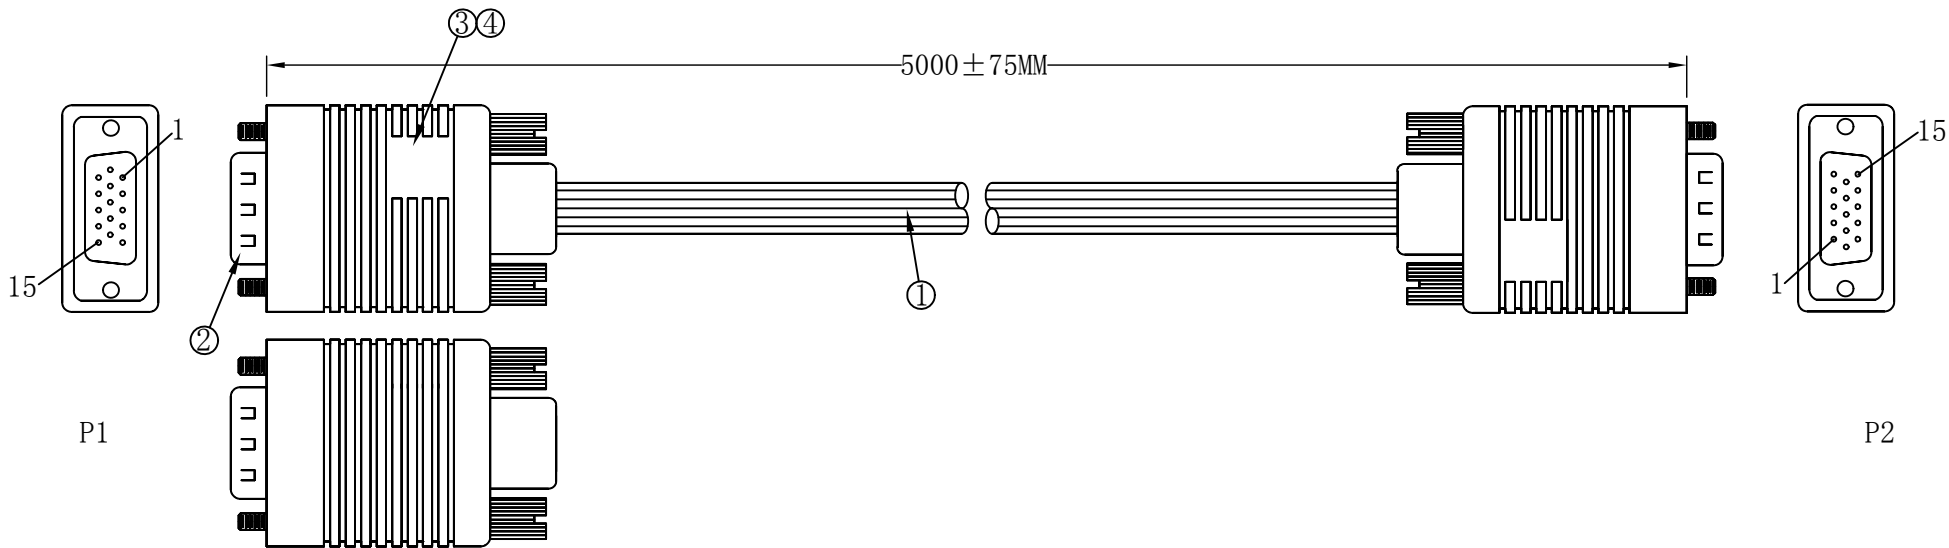


NOTES:

1. Open/Short/Intermittence: 100%
2. Insulation Resistance: DC300V 10mS 10MΩ (Min)
3. Conductive Resistance: 10Ω (Max)
4. RESOLUTION: 1440*900@60Hz
5. RoHS & REACH COMPLIANT

PIN OUT


P1	P2	P1	P2
1	1	9	9
2	2	10	10
3	3	11	11
4	4	12	12
5	5	13	13
6	6	14	14
7	7	15	15
8	8	SHELL	DRAIN SHELL

④	MOLDED	45P BLACK PVC		G	Ltemref	Quantity	Title/Name, designation, material, dimension etc			Article NO. /Reference		
③	MOLDED	LDPE		G	Designed by		Checkde by	Approved by - date	File name	Date	Scale	
②	CONNECTOR	VGA 15P MALE, GOLD PLATED PIN, BLUE INSULATION, NICKEL PLATED SHELL	2	PCS	FLY		HELEN	2024. 10. 22		2024. 10. 22	FREE	
①	CABLE	(7/0. 10TC+FPE+D+A+PVC)*3+7/0. 10TC*9C+ADB, BLACK PVC DENTATE JACKET, OD:8.0±0.2MM MARKING:connektgear AWM STYLE 2919 80°C 30V LOW VOLTAGE Computer Cable RoHS & REACH Compliant	5000	MM	ANGLE:		20-1050-1					
NO.	MATERIAL	DESCRIPTION	QTY.	UNIT	UNIT:MM					Edition	Sheet	
										1	9/13	

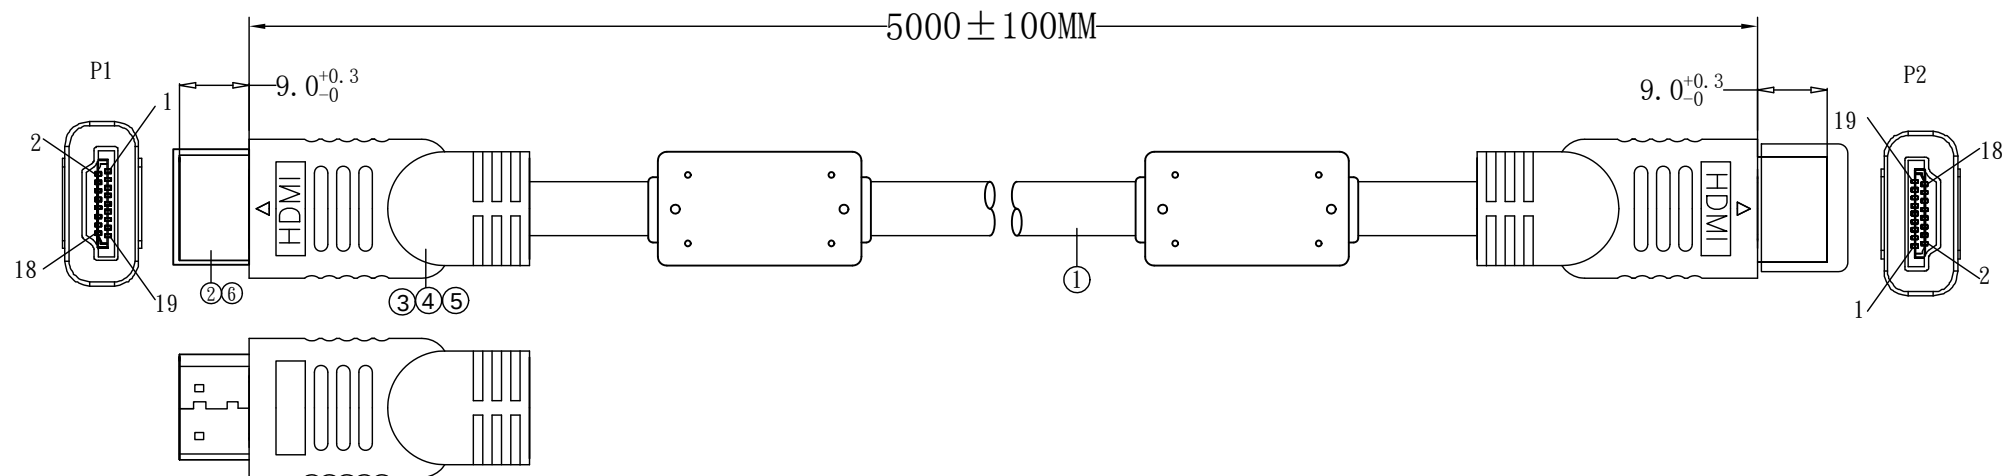


NOTES:

1. OPEN/SHORT/INTERMITTENCE:100%.
2. INSULATION RESISTANCE:DC 300V 0.01S 10MΩMIN
3. CONDUCTIVE RESISTANCE:5ΩMAX
4. RESOLUTION:4K*2K@60HZ 4:4:4 8BIT.
5. ROHS & REACH COMPLIANT

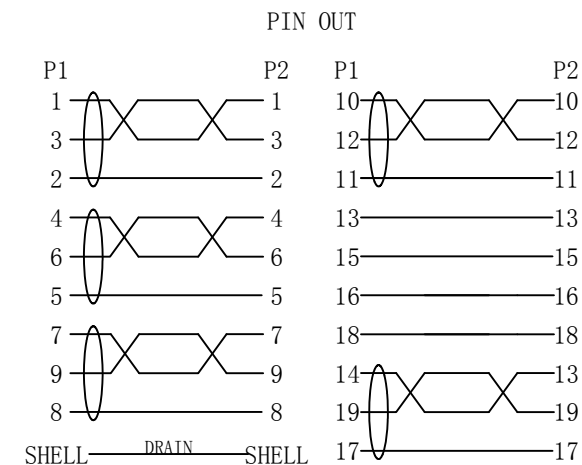


⑥	DUST CAP	HDMI A MALE DUST CAP	2	PCS
⑤	FERRIT RING	FERRITE MAGNETIC RING RH14. 2*28. 5*9MM	2	PCS
④	MOLDED	45P BLACK PVC		G
③	MOLDED	LDPE		G
②	CONNECTOR	HDMI A MALE, GOLD PLATED PIN, BLACK INSULATION, GOLD PLATED SHELL	2	PCS
①	CABLE	(1/0. 404BC*1P+1/0. 254BC+AL+HM)*4C+(1/0. 254BC*1P+1/0. 254TC+AL+HM)*1C+1/0. 254BC*3C +1/0. 404BC+AL+D(1/0. 32BC)+B(128/0. 12AL-MG) BLACK PVC JACKET OD:9.0±0. 2MM MARKING:4K×2K(2160P)Ultra-High Definition 3D Cable High Speed HDMI™ Cable with Ethernet E***** 兄 AWM 20276 80℃ 30V VW-1	5000	MM
NO.	MATERIAL	DESCRIPTION	QTY.	UNIT


Ltemref	Quantity	Title/Name, designation, material, dimension etc			Article NO. /Reference		
Designed by FLY	Checkde by HELEN	Approved by - date 2024. 10. 22	File name	Date 2024. 10. 22	Scale FREE		
ANGLE:				20-1050-2			
UNIT:MM						Edition 1	Sheet 10/13

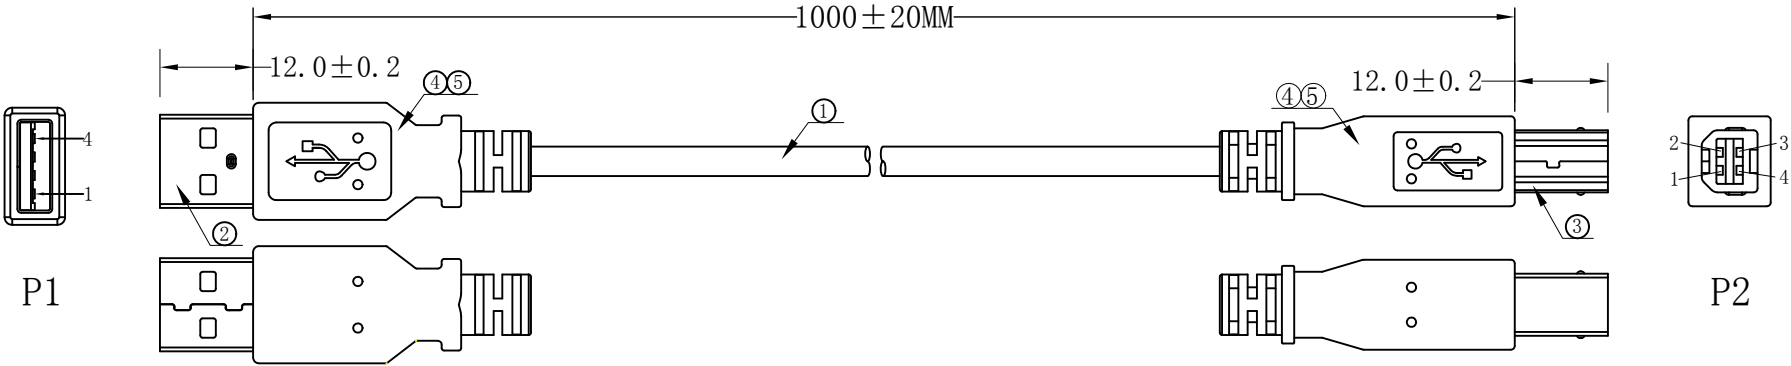

NOTES:
1.100% short,open and miss wire test
2.RoHS & REACH Compliant

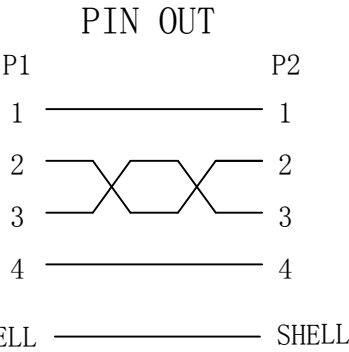


⑤	MOLDED	45P BLACK PVC		G					
④	MOLDED	LDPE		G					
③	CONNECTOR	USB2.0 BM, GOLD PLATED PIN, BLUE INSULATION, NICKEL PLATED SHELL	1	PCS	Ltemref	Quantity	Title/Name, designation, material, dimension etc		Article NO./Reference
②	CONNECTOR	USB2.0 AM, GOLD PLATED PIN, BLUE INSULATION, NICKEL PLATED SHELL	1	PCS	Designed by FLY	Checkde by HELEN	Approved by - date 2024. 10. 22	File name	Date 2024. 10. 22
①	CABLE	7/0. 12BC*1P+7/0. 12BC*2C+AL/MY+D(7/0. 12CCS)+B(48/0. 12ALM) BLACK PVC JACKET OD:3.8±0.2mm MARKING: connektgear AWM STYLE 2725 80℃ 30V VW-1 USB2.0 HIGH SPEED CABLE ROHS & REACH COMPLIANT	1000	MM	ANGLE:			20-1050-4	
NO.	MATERIAL	DESCRIPTION	QTY.	UNIT	UNIT:MM				Edition 1
									Sheet 11/13

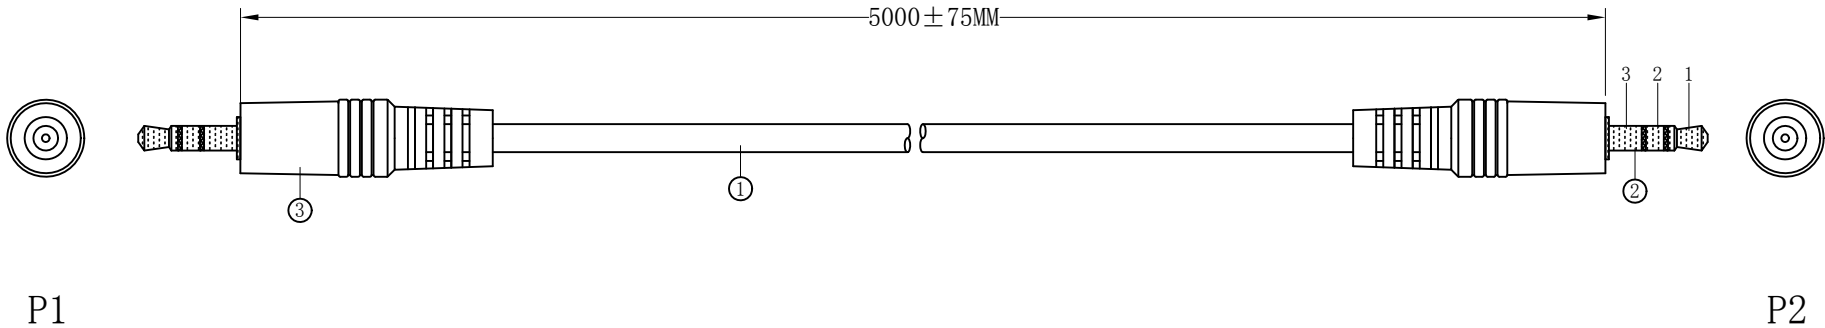


PIN OUT			
P1		P2	
1	—————	1	
2	—————	2	
3	————— SPIRAL ———	3	

- NOTES:
- 1.100% short,open and miss wire test
 - 2.RoHS & REACH Compliant

						Ltemref	Quantity	Title/Name, designation, material, dimension etc			Article NO./Reference		
						Designed by	Checkde by	Approved by - date	File name	Date	Scale		
						FLY	HELEN	2024. 10. 22		2024. 10. 22	FREE		
③	MOLDED	45P BLACK PVC			G	ANGLE: 		20-1050-5					
②	CONNECTOR	DC 3.5/M STEREO PLUG, BLACK INSULATOR, GOLD PLATED BRASS	1	PCS									
①	CABLE	10/0.1CCS*2C+S (28/0.1CCS), JACKET:BLACK PVC, OD:3.0±0.15mm	5000	MM		UNIT:MM							
NO.	MATERIAL	DESCRIPTION	QTY.	UNIT									

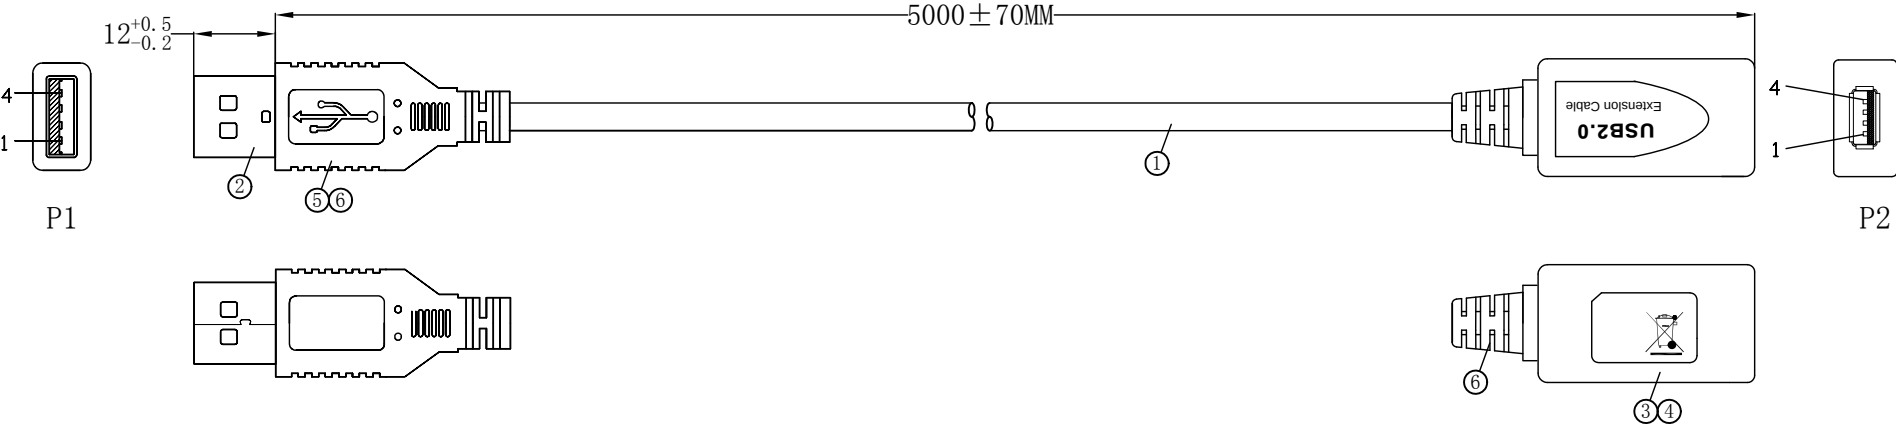

PIN OUT

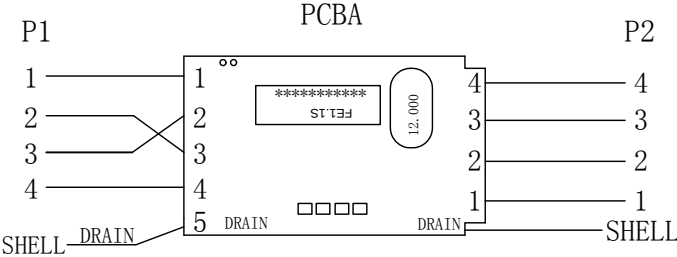

- NOTES:
- 1.100% short,open and miss wire test
 - 2.RoHS & REACH Compliant

⑥	MOLDED	45P BLACK PVC		G							
⑤	MOLDED	LDPE		G							
④	PLASTIC HOOD	USB2.0 AF BLACK PLASTIC HOOD	1	PCS	Ltemref	Quantity	Title/Name, designation, material, dimension etc			Article NO./Reference	
③	CONNECTOR	USB2.0 AF, GOLD PLATED PIN, BLUE INSULATION, NICKEL PLATED SHELL+PCB-FE1.1S	1	PCS	Designed by		Checkde by	Approved by - date	File name	Date	Scale
②	CONNECTOR	USB2.0 AM, GOLD PLATED PIN, BLUE INSULATION, NICKEL PLATED SHELL	1	PCS	FLY		HELEN	2024.10.22		2024.10.22	FREE
①	CABLE	7/0.12TC*1P+7/0.20*2C+AL-FOIL+D(1/0.254BC)+B(64/0.12AL-MG) BLACK PVC JACKET OD:4.5±0.2mm MARKING:E***** 兄 AWM 2725 80℃ 30V VW-1 28AWG/1P AND 24AWG/2C USB2.0 CABLE	5000	MM	ANGLE: 					20-1050-3	
NO.	MATERIAL	DESCRIPTION	QTY.	UNIT	UNIT:MM						
										1	13/13