


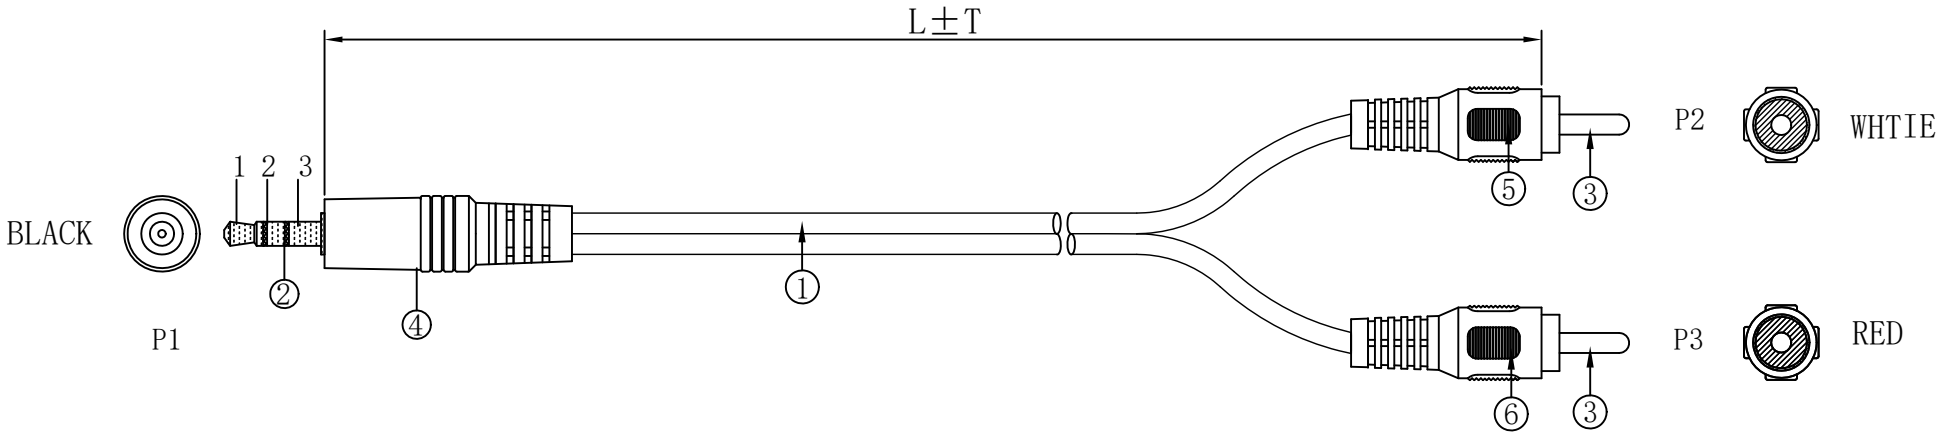

P/N	L/mm	T/mm
23-1020	2000	30
23-1030	3000	45
23-1050	5000	60
23-1100	10000	100
23-1150	15000	150

NOTES:


1. Open/Short/Intermittence: 100%

2. Insulation Resistance: DC300V 10mS 10M Ω (Min)

3. Conductive Resistance: 5 Ω (Max)

4. RoHS & REACH COMPLIANT

PIN OUT

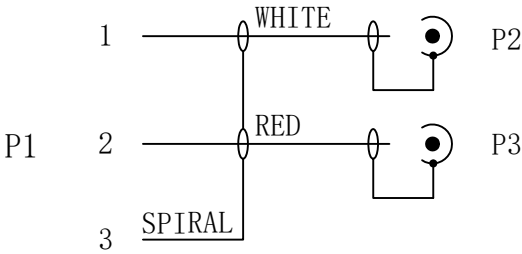

⑥	MOLDED	45P RED PVC		G	Ltemref Quantity Title/Name, designation, material, dimension etc Article NO./Reference			
⑤	MOLDED	45P WHITE PVC		G				
④	MOLDED	45P BLACK PVC		G				
③	CONNECTOR	RAC MALE, WHITE INSULATION, GOLD-PLATED BRASS	2	PCS				
②	CONNECTOR	DC3. 5MM 3-POLE MALE STEREO PLUG:BRASS, GOLD-PLATED	1	PCS				
①	CABLE	[10/0. 10CCS+SPIRAL (28*0. 10CCS)]*2C, BLACK MATT PVC, OD:2. 8*5. 6±0. 15mm	L	MM	ANGLE: 		DC 3.5 M TO 2*RCA	
NO.	MATERIAL	DESCRIPTION	QTY.	UNIT				UNIT:MM