


P/N	L/mm	T/mm
23-2020	2000	30
23-2030	3000	40
23-2050	5000	80
23-2100	10000	100
23-2150	15000	120
23-2200	20000	150

PIN OUT

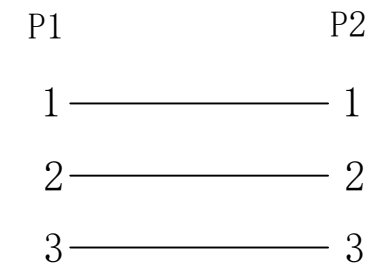

NOTES:

1. Open/Short/Intermittence: 100%
2. Insulation Resistance: DC300V 10mS 10M Ω (Min)
3. Conductive Resistance: 5 Ω (Max)
4. RoHS & REACH COMPLIANT

					Ltemref	Quantity	Title/Name, designation, material, dimension etc	Article NO. /Reference			
					Designed by FLY		Checkde by HELEN	Approved by - date 2025. 12. 04	File name	Date 2025. 12. 04	Scale FREE
③	MOLDED	45P BLACK PVC		G	ANGLE: 			DC3.5 M TO M			
②	CONNECTOR	DC3.5MM 3-POLE MALE STEREO PLUG:BRASS, GOLD-PLATED	2	PCS							
①	CABLE	10/0. 10CCS*2C+D(10/0. 10CCS)+BLACK MATT PVC JACKET, OD:3. 0±0. 15mm	L	MM							
NO.	MATERIAL	DESCRIPTION	QTY.	UNIT	UNIT:MM		23-2***		Edition 1	Sheet 1/1	