



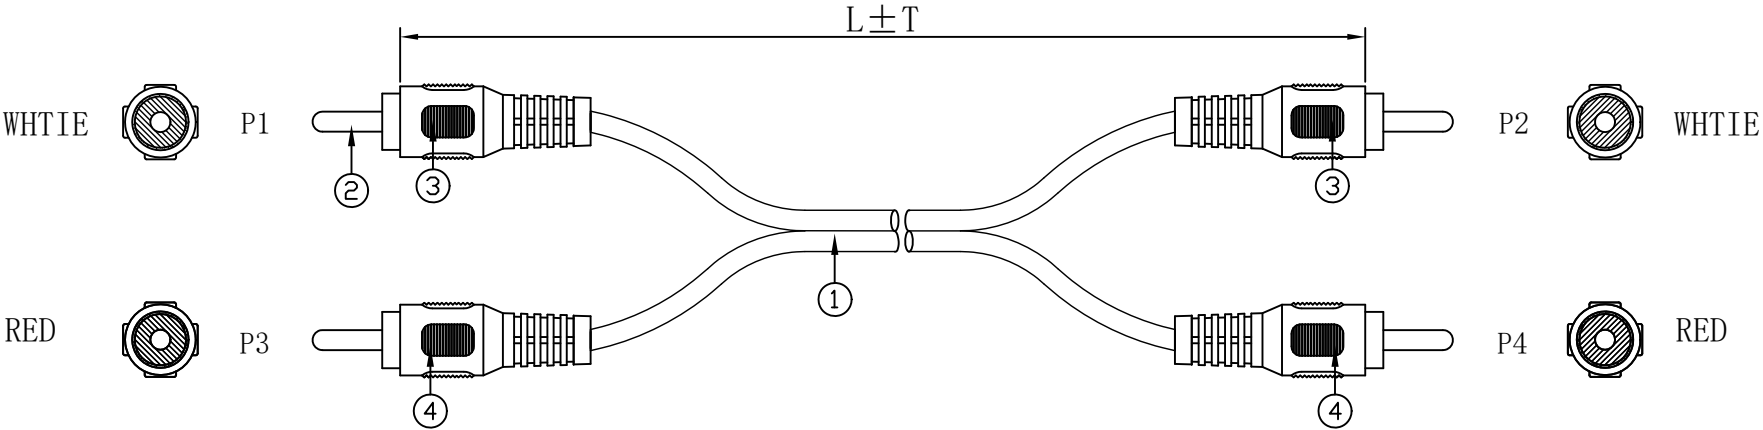

P/N	L/mm	T/mm
23-4020	2000	30
23-4030	3000	45
23-4050	5000	60
23-4100	10000	100
23-4150	15000	150
23-4200	20000	200

PIN OUT

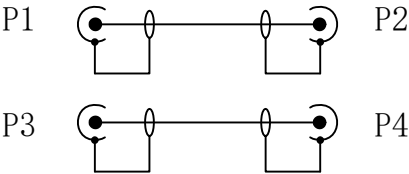

- NOTES:
- 1. Open/Short/Intermittence: 100%
 - 2. Insulation Resistance: DC300V 10mS 10M Ω (Min)
 - 3. Conductive Resistance: 5 Ω (Max)
 - 4. RoHS & REACH COMPLIANT

					Ltemref	Quantity	Title/Name, designation, material, dimension etc			Article NO. /Reference		
④	MOLDED	45P RED PVC		G	Designed by FLY		Checkde by HELEN	Approved by - date 2025. 12. 04	File name	Date 2025. 12. 04	Scale FREE	
③	MOLDED	45P WHITE PVC		G	ANGLE:					RCAX2 M TO RCAX2 M		
②	CONNECTOR	RAC MALE, WHITE INSULATION, PLUG:BRASS, GOLD-PLATED	4	PCS								
①	CABLE	[10/0. 10CCS+SPIRAL (28*0. 10CCS)]*2C, BLACK MATT PVC, OD:2. 8*5. 6±0. 15mm	L	MM	UNIT:MM					23-4***		
NO.	MATERIAL	DESCRIPTION	QTY.	UNIT								
										Edition 1	Sheet 1/1	