


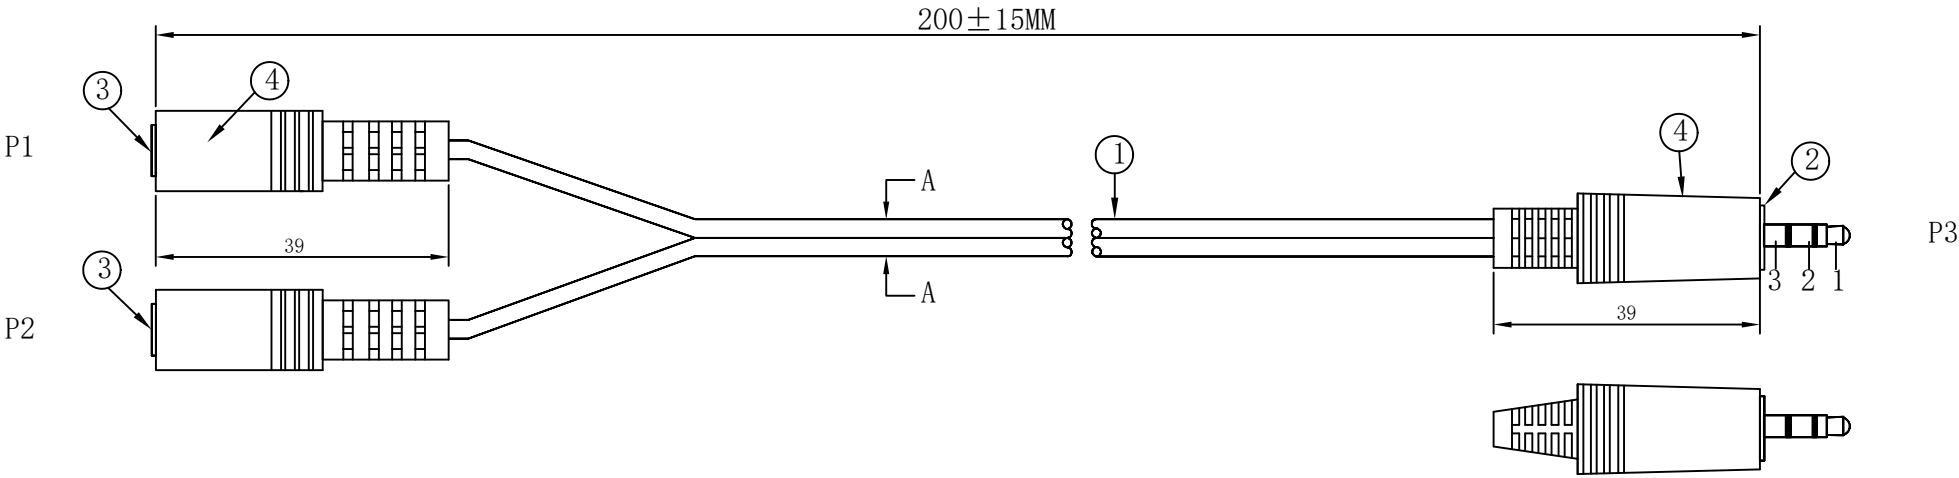

NOTES:

- 1. Open/Short/Intermittence: 100%
- 2. Insulation Resistance: DC300V 10mS $10\text{M}\Omega$ (Min)
- 3. Conductive Resistance: 3Ω (Max)
- 4. RoHS & REACH COMPLIANT

PIN OUT

P2	P3	P1
1	1	1
2	2	2
3	3	3

						Ltemref	Quantity	Title/Name, designation, material, dimension etc			Article NO. /Reference			
④	MOLDED	BLACK PVC			G	Designed by FLY	Checkde by HELEN	Approved by - date 2025. 12. 04	File name	Date 2025. 12. 04	Scale FREE			
③	CONNECTOR	DC3. 5MM 3-POLE FEMALE STEREO PLUG:BRASS, GOLD-PLATED	2		PCS	ANGLE: 				DC3.5 M TO 2*F				
②	CONNECTOR	DC3. 5MM 3-POLE MALE STEREO PLUG:BRASS, GOLD-PLATED	1		PCS									
①	CABLE	(10/0. 10CCS*3C)*2F, BLACK PVC, OD:3. 0*6. 0±0. 15mm	200		MM	UNIT:MM								
NO.	MATERIAL	DESCRIPTION	QTY.	UNIT										
												26-0002		Edition 1