

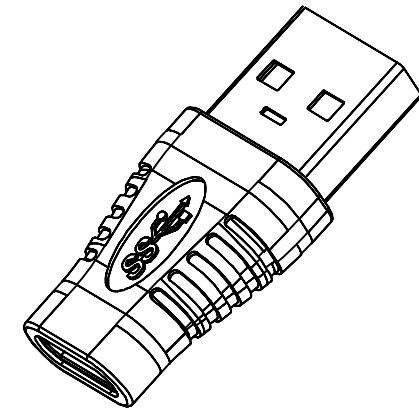


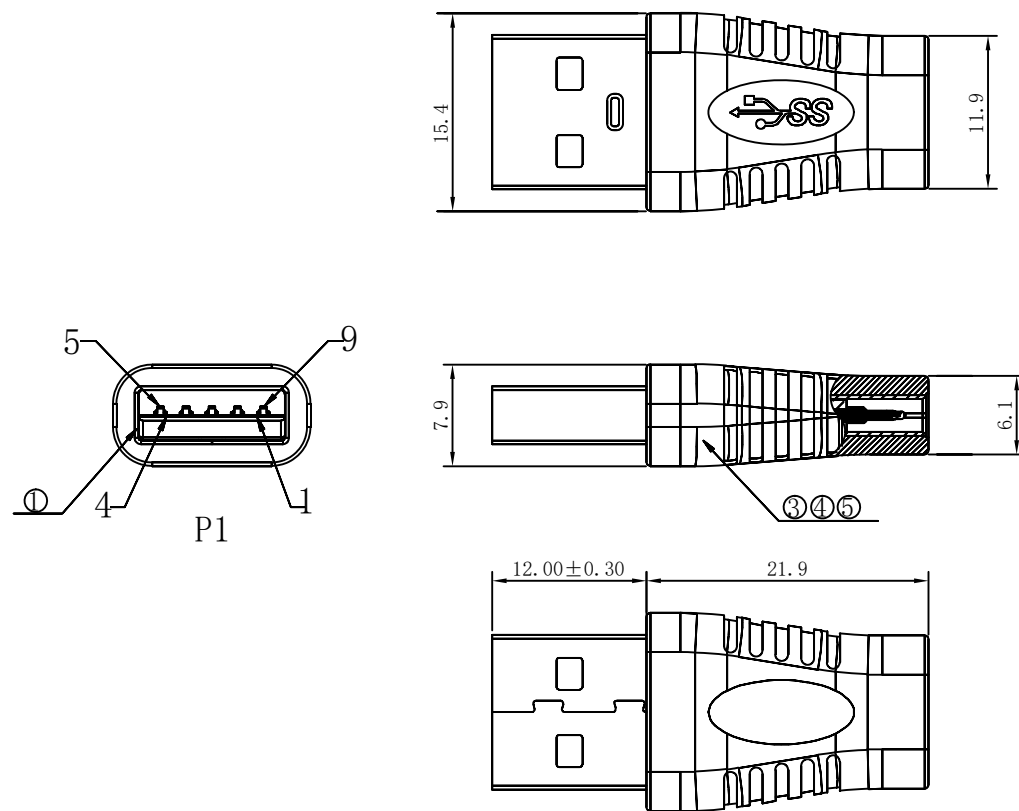

PIN OUT

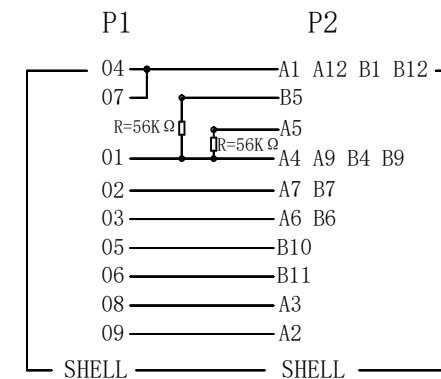

NOTES:

1. OPEN/SHORT/MIS WIRE TEST:100%.
2. INSULATION RESISTANCE:DC 300V 0.01S 10MΩMIN
3. CONDUCTIVE RESISTANCE:5ΩMAX
4. ROHS & REACH COMPLIANT
5. Asymmetric Pinout:
Pin Side A: Supports USB3.0 transfer speeds(5 Gbps)
Pin Side B: Supports USB2.0 transfer speeds(480 Mbps)

⑤	MOLDED	45P BLACK PVC		G	Ltemref	Quantity	Title/Name, designation, material, dimension etc	Article NO. /Reference			
④	MOLDED	LDPE		G	Designed by FLY		Checkde by HELEN	Approved by - date 2025. 11. 26	File name	Date 2025. 11. 26	Scale FREE
③	PCBA	PCB, T=0.8MM 2R(R=56K Ω)	1	PCS	ANGLE: 		USB3.0 AM TO TYPE CF Adapter				
②	CONNECTOR	USB TYPE CF, GOLD PLATED PIN, BLACK INSULATION, NICKEL PLATED SHELL	1	PCS							
①	CONNECTOR	USB3.0 A MALE, GOLD PLATED PIN, BLUE INSULATION, NICKEL PLATED SHELL	1	PCS	UNIT:MM		26-0420				
NO.	MATERIAL	DESCRIPTION	QTY.	UNIT							
									Edition 1	Sheet 1/1	