RevNo.	Revision note	Date	Signature	Checked

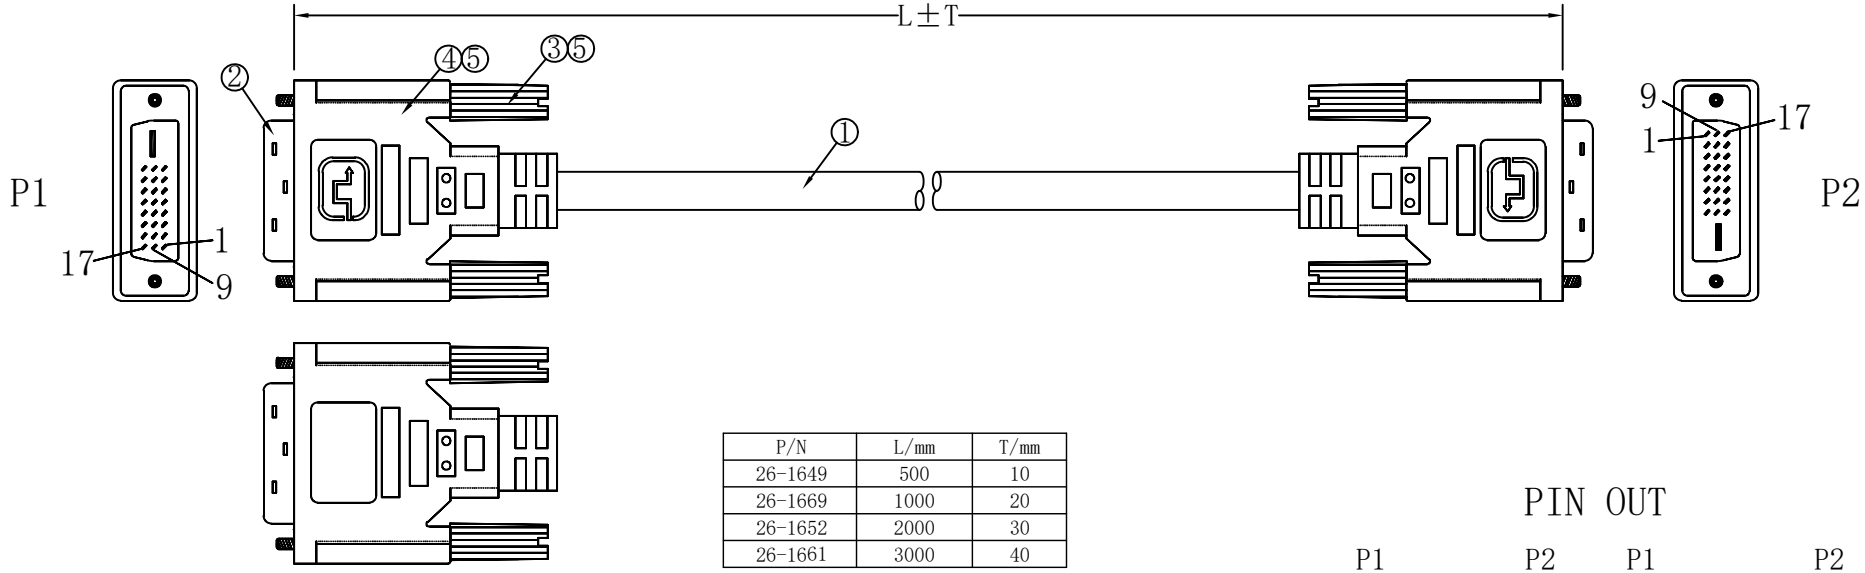

P/N	L/mm	T/mm
26-1649	500	10
26-1669	1000	20
26-1652	2000	30
26-1661	3000	40

PIN OUT

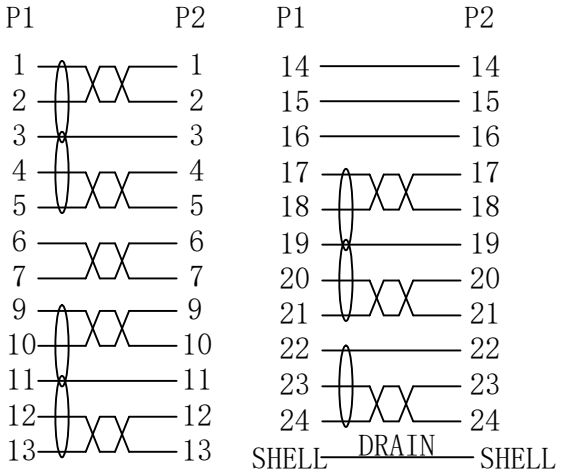

NOTES:

1. Open/Short/Intermittence: 100%
2. Insulation Resistance: DC300V 10mS 10MΩ(Min)
3. Conductive Resistance: 5Ω(Max)
4. RESOLUTION: 1920*1080P@60Hz
5. RoHS & REACH COMPLIANT

NO.	MATERIAL	DESCRIPTION	QTY.	UNIT
⑤	MOLDED	45P BLACK PVC		G
④	MOLDED	LDPE		G
③	SCREW	IRON,NICKEL PLATED SCREW	4	PCS
②	CONNECTOR	DVI(24+1) MALE,GOLD PLATED PIN,BLACK INSULATION,NICKEL PLATED SHELL	2	PCS
①	CABLE	(1/0.254BC*1P+1/0.254CCS+AM)X7+1/0.254BC*1P+1/0.254BC*3C+AL+D(1/0.254BC) +B(80/0.12AL-MG),BLACK PVC JACKET,OD:7.3±0.2mm MARKING:AWM STYLE 20276 VW-1 80℃ 30V DVI CABLE ROHS & REACH Compliant	L	MM

Ltemref	Quantity	Title/Name,designation,material,dimension etc	Article NO./Reference
Designed by FLY	Checkde by HELEN	Approved by - date 2025.11.06	File name
Date 2025.11.06	Scale FREE		
ANGLE:		DVI(24+1) M/M	
UNIT:MM		26-16XX	Edition 1 / Sheet 1/1