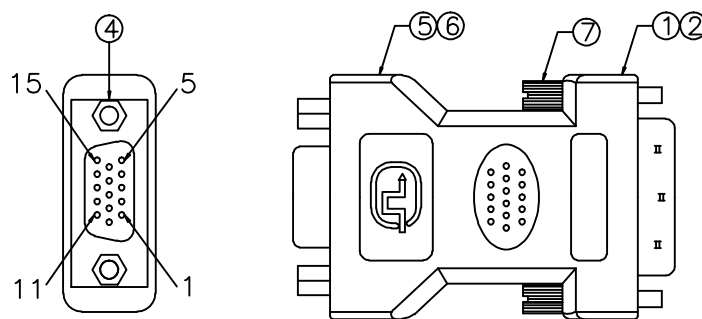


REQUIREMENTS:

1:100% short and open testing.

2:Test conditions
DC300V /10MS
Insulation resistance 10MΩ(Min)
Conduction resistance 5Ω(Max)

3: RoHS & REACH Compliant

⑦	SCREW	#4-40 5*22.5MM	2	PCS
⑥	OUTER MOULDED	BLACK 45P PVC	26	G
⑤	INNER MOULDED	LDPE	8.2	G
④	CONNECTOR	HDB15PIN/F,BLUE INSULATOR,HEX-NUT,NICKEL PLATED	1	PCS
③	CONNECTOR	DVI 24+5/M BLACK INSULATOR,NICKEL PLATED	1	PCS
②	WIRE	UL1007 28AWG BLACK JACKET	0.055	M
①	WIRE	UL1007 28AWG RED JACKET L=45MM*11	0.495	M
NO.	MATERIAL	DESCRIPTION	QTY.	UNIT

PIN OUT

P1	P2
1	C1
2	C2
3	C3
13	C4
6+7+8	C5
9	14+16
5+10	15
15	6
12	7
14	8
SHELL	SHELL

Ltemref	Quantity	Title/Name,designation,material,dimension etc	Article No./Reference
Designed by ACHY	Checked by HELEN	Approved by - date MARCH 4.2012	File name DV124+5/M-HDB15/F
ANGLE:	26-1654		
UNIT:MM	26-1654		Edition 1
		Sheet 1/1	