


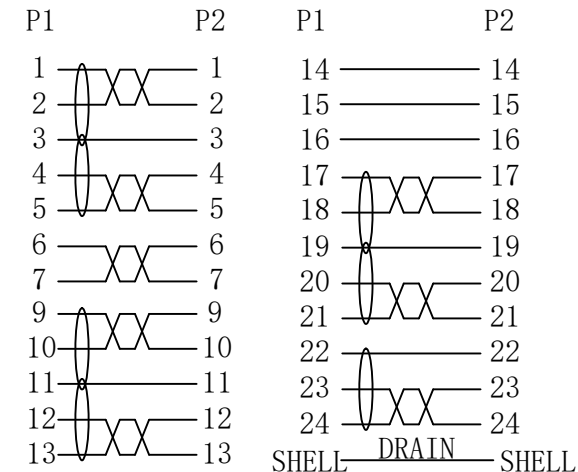

1. Open/Short/Intermittence: 100%
2. Insulation Resistance: DC300V 10mS 10M Ω (Min)
3. Conductive Resistance: 5 Ω (Max)
4. RESOLUTION: 1920*1080P@60Hz
5. RoHS & REACH COMPLIANT

⑤	MOLDED	45P BLACK PVC		G	<table><tr><td>Itemref</td><td>Quantity</td><td colspan="3">Title/Name, designation, material, dimension etc</td><td colspan="3">Article NO. /Reference</td></tr><tr><td>③</td><td>SCREW</td><td colspan="3">IRON,NICKEL PLATED SCREW</td><td>4</td><td>PCS</td><td></td></tr><tr><td>②</td><td>CONNECTOR</td><td colspan="3">DVI (24+1) MALE, GOLD PLATED PIN, BLACK INSULATION, NICKEL PLATED SHELL</td><td>2</td><td>PCS</td><td></td></tr><tr><td>①</td><td>CABLE</td><td colspan="3">(1/0. 254BC*1P+1/0. 254CCS+AM) X7+1/0. 254BC*1P+1/0. 254BC*3C+AL+D (1/0. 254BC)+B (80/0. 12AL-MG), BLACK PVC JACKET, OD: 7. 3±0. 2mm MARKING: AWM STYLE 20276 VW-1 80℃ 30V DVI CABLE ROHS & REACH Compliant</td><td>L</td><td>MM</td><td></td></tr><tr><td>NO.</td><td>MATERIAL</td><td colspan="3">DESCRIPTION</td><td>QTY.</td><td>UNIT</td><td></td></tr></table>	Itemref	Quantity	Title/Name, designation, material, dimension etc			Article NO. /Reference			③	SCREW	IRON,NICKEL PLATED SCREW			4	PCS		②	CONNECTOR	DVI (24+1) MALE, GOLD PLATED PIN, BLACK INSULATION, NICKEL PLATED SHELL			2	PCS		①	CABLE	(1/0. 254BC*1P+1/0. 254CCS+AM) X7+1/0. 254BC*1P+1/0. 254BC*3C+AL+D (1/0. 254BC)+B (80/0. 12AL-MG), BLACK PVC JACKET, OD: 7. 3±0. 2mm MARKING: AWM STYLE 20276 VW-1 80℃ 30V DVI CABLE ROHS & REACH Compliant			L	MM		NO.	MATERIAL	DESCRIPTION			QTY.	UNIT	
Itemref	Quantity	Title/Name, designation, material, dimension etc				Article NO. /Reference																																							
③	SCREW	IRON,NICKEL PLATED SCREW				4	PCS																																						
②	CONNECTOR	DVI (24+1) MALE, GOLD PLATED PIN, BLACK INSULATION, NICKEL PLATED SHELL				2	PCS																																						
①	CABLE	(1/0. 254BC*1P+1/0. 254CCS+AM) X7+1/0. 254BC*1P+1/0. 254BC*3C+AL+D (1/0. 254BC)+B (80/0. 12AL-MG), BLACK PVC JACKET, OD: 7. 3±0. 2mm MARKING: AWM STYLE 20276 VW-1 80℃ 30V DVI CABLE ROHS & REACH Compliant				L	MM																																						
NO.	MATERIAL	DESCRIPTION			QTY.	UNIT																																							
④	MOLDED	LDPE		G																																									
③	SCREW	IRON,NICKEL PLATED SCREW			4	PCS																																							
②	CONNECTOR	DVI (24+1) MALE, GOLD PLATED PIN, BLACK INSULATION, NICKEL PLATED SHELL			2	PCS																																							
①	CABLE	(1/0. 254BC*1P+1/0. 254CCS+AM) X7+1/0. 254BC*1P+1/0. 254BC*3C+AL+D (1/0. 254BC)+B (80/0. 12AL-MG), BLACK PVC JACKET, OD: 7. 3±0. 2mm MARKING: AWM STYLE 20276 VW-1 80℃ 30V DVI CABLE ROHS & REACH Compliant			L	MM																																							
NO.	MATERIAL	DESCRIPTION			QTY.	UNIT																																							

Designde by FLY	Checkde by HELEN	Approved by - date 2025. 11. 06	File name	Date 2025. 11. 06	Scale FREE
ANGLE:				DVI (24+1) M/M	
UNIT:MM				26-16XX	
				Edition 1	Sheet 1/1