



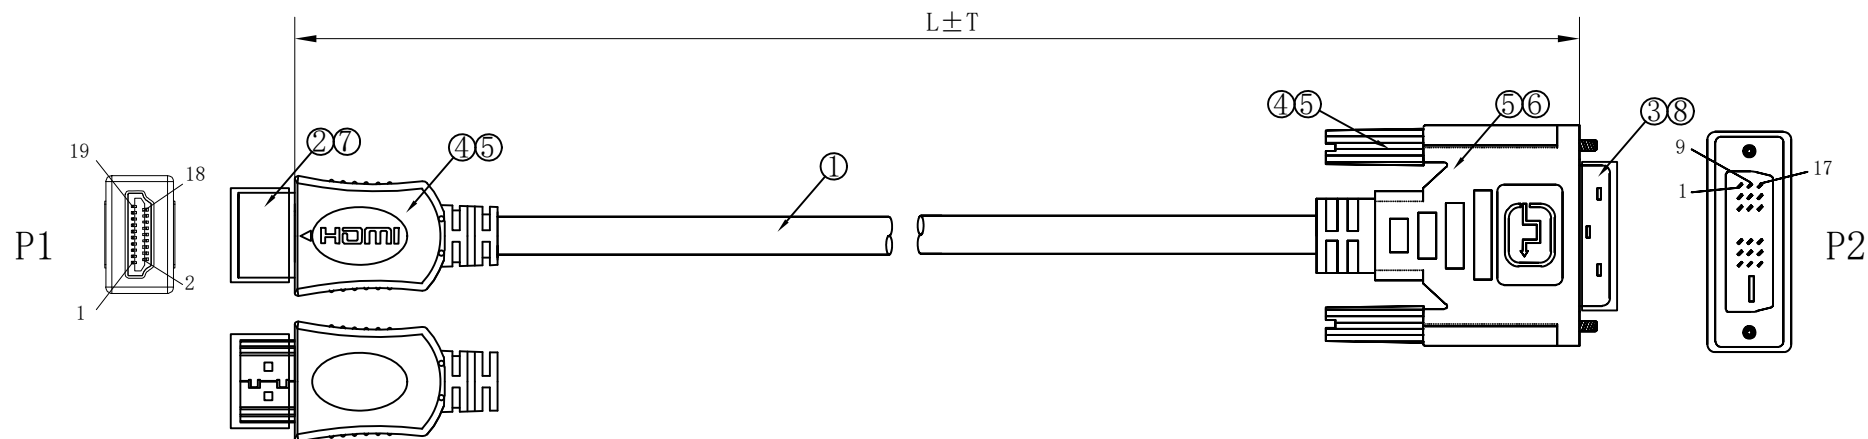

P/N	L/mm	T/mm
26-1684	2000	30
26-1685	3000	50

PIN OUT

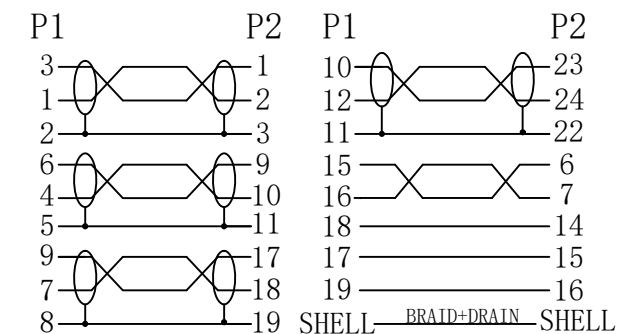

NOTES:

- Open/Short/Intermittence: 100%
- Insulation Resistance: DC300V 10mS 10M Ω (Min)
- Conductive Resistance: 5 Ω (Max)
- RESOLUTION: 1920*1080P@60Hz
- RoHS & REACH COMPLIANT

⑧	DUST CAP	DVI MALE DUST CAP	1	PCS
⑦	DUST CAP	HDMI A MALE DUST CAP	1	PCS
⑥	MOLDED	45P BLACK PVC		G
⑤	MOLDED	LDPE		G
④	SCREW	IRON,NICKEL PLATED SCREW	2	PCS
③	CONNECTOR	DVI (18+1) MALE, GOLD PLATED PIN, BLACK INSULATION, GOLD PLATED SHELL	1	PCS
②	CONNECTOR	HDMI A MALE, GOLD PLATED PIN, BLACK INSULATION, GOLD PLATED SHELL	1	PCS
①	CABLE	(1/0. 254BC*1P+1/0. 254CCS+AM)*4+1/0. 254BC*1P+1/0. 254BC*3C+AL+D (1/0. 254BC)+B (80/0. 12AL-MG), BLACK PVC JACKET, OD:6.0 $\pm$ 0.2mm MARKING: AWM 20276 VW-1 80°C 30V DVI CABLE ROHS COMPLIANT	L	MM
NO.	MATERIAL	DESCRIPTION	QTY.	UNIT

Ltemref	Quantity	Title/Name, designation, material, dimension etc			Article NO./Reference		
Designed by FLY	Checkde by HELEN	Approved by - date 2025. 11. 06	File name	Date 2025. 11. 06	Scale FREE		
ANGLE:				HDMI AM-DVI(18+1)M			
UNIT:MM				26-16XX		Edition 1	Sheet 1/1