


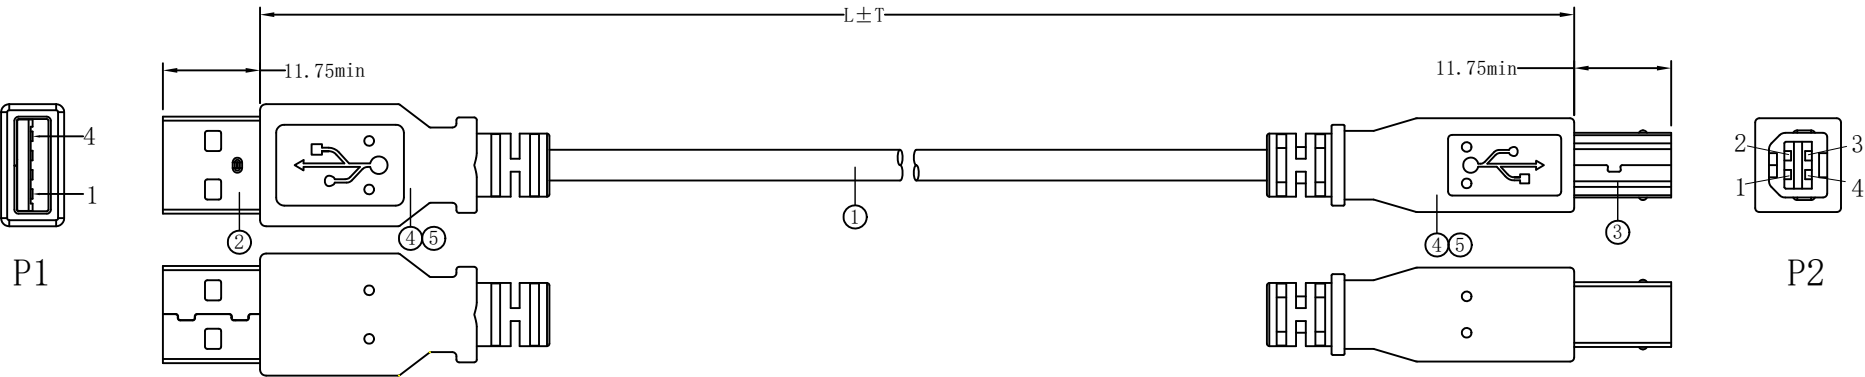

P/N	L/mm	T/mm
26-2900	2000	30
26-2900/2	2000	30
26-2907	3000	50
26-2907/2	3000	50


NOTES:

1. OPEN/SHORT/INTERMITTENCE:100%.

2. INSULATION RESISTANCE:DC 300V 0.01S 10MΩMin

3. CONDUCTIVE RESISTANCE:5 Ω Max

4. ROHS & REACH COMPLIANT



⑤	MOLDED	45P BLACK PVC		G								
④	MOLDED	LDPE		G								
③	CONNECTOR	USB2.0 B MALE, GOLD PLATED PIN, WHITE INSULATION, NICKEL PLATED SHELL	1	PCS	Ltemref	Quantity	Title/Name, designation, material, dimension etc			Article NO./Reference		
②	CONNECTOR	USB2.0 A MALE, GOLD PLATED PIN, WHITE INSULATION, NICKEL PLATED SHELL	1	PCS	Designed by FLY		Checkde by HELEN	Approved by - date 2025.11.07		File name	Date 2025.11.07	Scale FREE
①	CABLE	7/0.12BC*1P+7/0.12BC*2C+AL+D(7/0.12CCS)+B(48/0.12AL-MG), BLACK PVC JACKET, OD:3.8±0.2mm MARKING: connektgear AWM STYLE 2725 80℃ 30V VW-1 USB2.0 HIGH SPEED CABLE ROHS & REACH COMPLIANT	L	MM	ANGLE: 					USB2.0 AM-BM		
NO.	MATERIAL	DESCRIPTION	QTY.	UNIT	UNIT:MM					26-290X		Edition 1