


P/N	L/mm	T/mm
26-2803	1500	20
26-2913	2000	30
26-2915	3000	40

- NOTES:
- 1. OPEN/SHORT/INTERMITTENCE:100%.
 - 2. INSULATION RESISTANCE:DC 300V 0.01S 10MΩ Min
 - 3. CONDUCTIVE RESISTANCE:5 Ω Max
 - 4. RoHS & REACH COMPLIANT

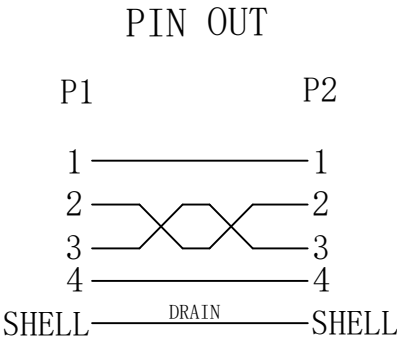

⑤	MOLDED	45P BLACK PVC		G							
④	MOLDED	LDPE		G							
③	CONNECTOR	USB2.0 AF, GOLD PLATED PIN, WHITE INSULATION, NICKEL PLATED SHELL	1	PCS	Ltemref	Quantity	Title/Name, designation, material, dimension etc			Article NO./Reference	
②	CONNECTOR	USB2.0 AM, GOLD PLATED PIN, WHITE INSULATION, NICKEL PLATED SHELL	1	PCS	Designed by FLY		Checkde by HELEN	Approved by - date 2025. 11. 06	File name	Date 2025. 11. 06	Scale FREE
①	CABLE	7/0. 12BC*1P+7/0. 12BC*2C+AL/MY+D(7/0. 12CCS)+B(48/0. 12AL-MG), BLACK PVC JACKET, OD:3. 8±0. 2mm MARKING: connektgear AWM STYLE 2725 80℃ 30V VW-1 USB2.0 HIGH SPEED CABLE ROHS & REACH COMPLIANT	L	MM	ANGLE: 					USB2.0 AM-AF	
NO.	MATERIAL	DESCRIPTION	QTY.	UNIT	UNIT:MM					26-2803&2913&2915	