


P/N	L/mm	T/mm
26-2803	1500	20
26-2913	2000	30
26-2915	3000	40

NOTES:

1. OPEN/SHORT/INTERMITTENCE:100%.
2. INSULATION RESISTANCE:DC 300V 0.01S 10M Ω Min
3. CONDUCTIVE RESISTANCE:5 Ω Max
4. RoHS & REACH COMPLIANT

PIN OUT

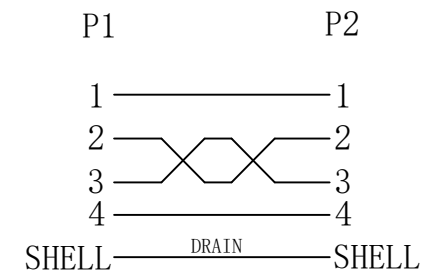

⑤	MOLDED	45P BLACK PVC		G	Ltemref	Quantity	Title/Name, designation, material, dimension etc	Article NO./Reference			
④	MOLDED	LDPE		G							
③	CONNECTOR	USB2.0 AF, GOLD PLATED PIN, WHITE INSULATION, NICKEL PLATED SHELL	1	PCS							
②	CONNECTOR	USB2.0 AM, GOLD PLATED PIN, WHITE INSULATION, NICKEL PLATED SHELL	1	PCS							
①	CABLE	7/0. 12BC*1P+7/0. 12BC*2C+AL/MY+D(7/0. 12CCS)+B(48/0. 12AL-MG), BLACK PVC JACKET, OD:3.8±0.2mm MARKING: connektgear AWM STYLE 2725 80℃ 30V VW-1 USB2.0 HIGH SPEED CABLE ROHS & REACH COMPLIANT	L	MM							
NO.	MATERIAL	DESCRIPTION	QTY.	UNIT	UNIT:MM						