



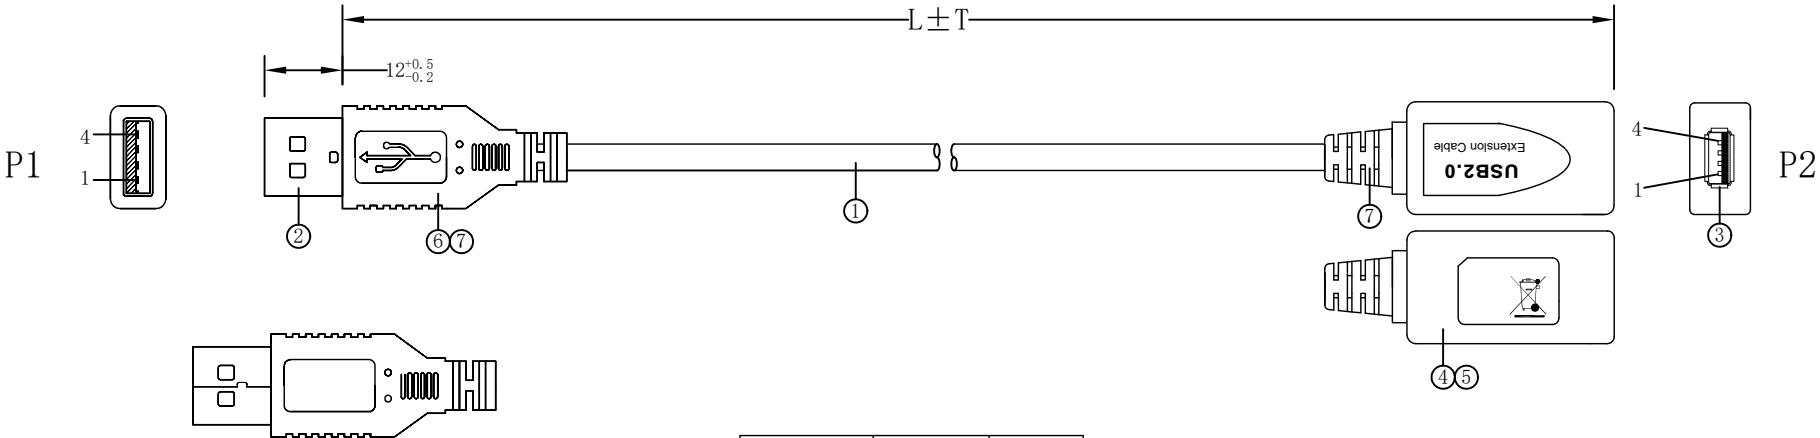

P/N	L/mm	T/mm
26-2906	5000	70
26-2930	10000	100

- NOTES:
- 1. OPEN/SHORT/INTERMITTENCE:100%.
 - 2. INSULATION RESISTANCE:DC 300V 0.01S 10MΩMin
 - 3. CONDUCTIVE RESISTANCE:10ΩMax
 - 4. ROHS & REACH COMPLIANT

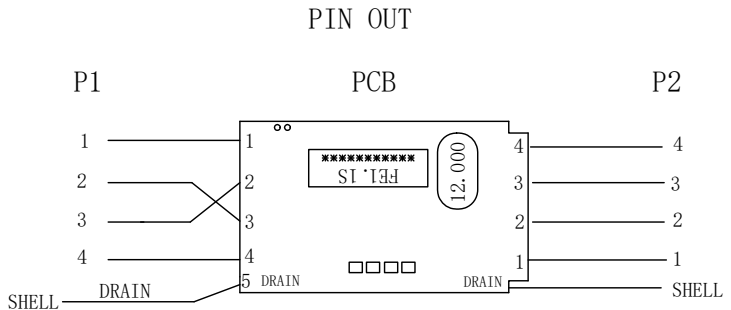

⑦	MOLDED	45P BLACK PVC		G
⑥	MOLDED	LDPE		G
⑤	PLASTIC SHELL	USB2.0 A FEMALE BLACK PLASTIC SHELL	1	SET
④	PCBA	PCB-FE1.1S	1	PCS
③	CONNECTOR	USB2.0 A FEMALE, PIN PLATED GOLD, WHITE INSULATION, SHELL PLATED NICKEL	1	PCS
②	CONNECTOR	USB2.0 A MALE, GOLD PLATED PIN, WHITE INSULATION, NICKEL PLATED SHELL	1	PCS
①	CABLE	7/0.12TC*1P+7/0.20TC*2C+AL+D(7/0.10TC)+B(64/0.12AL-MG), BLACK PVC JACKET, OD:4.5±0.2mm MARKING: E***** 兄 AWM 2725 80℃ 30V VW-1 28AWG/1P AND 24AWG/2C USB2.0 CABLE	L	MM
NO.	MATERIAL	DESCRIPTION	QTY.	UNIT

Ltemref	Quantity	Title/Name, designation, material, dimension etc			Article NO./Reference		
Designed by FLY	Checkde by HELEN	Approved by - date 2025. 11. 07	File name	Date 2025. 11. 07	Scale FREE		
ANGLE: 				USB2. 0 AM-AF+IC			
UNIT:MM				26-29XX		Edition 1	Sheet 1/1