


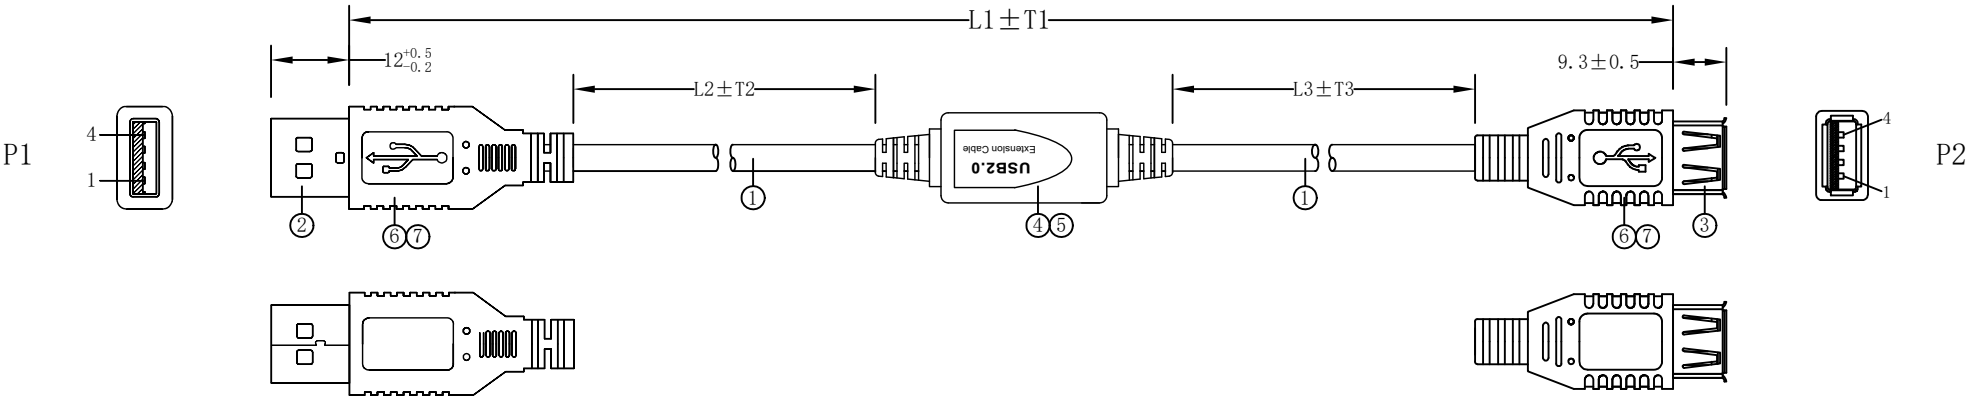

| P/N     | L1/mm | T1/mm | L2/mm | T2/mm | L3/mm | T3/mm |
|---------|-------|-------|-------|-------|-------|-------|
| 26-2931 | 25000 | 200   | 10000 | 100   | 5000  | 100   |

NOTES:


1. OPEN/SHORT/INTERMITTENCE:100%.

2. INSULATION RESISTANCE:DC 300V 0.01S 10MΩMin

3. CONDUCTIVE RESISTANCE:10ΩMax

4. ROHS & REACH COMPLIANT

PIN OUT

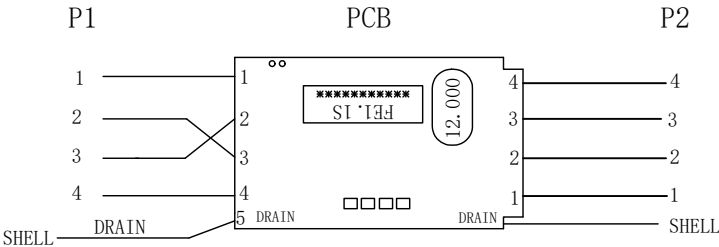

|     |               |                                                                                                                                                                      |       |      |
|-----|---------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|------|
| ⑦   | MOLDED        | 45P BLACK PVC                                                                                                                                                        |       | G    |
| ⑥   | MOLDED        | LDPE                                                                                                                                                                 |       | G    |
| ⑤   | PLASTIC SHELL | USB2.0 A FEMALE BLACK PLASTIC SHELL                                                                                                                                  | 1     | SET  |
| ④   | PCBA          | PCB-FE1.1S                                                                                                                                                           | 1     | PCS  |
| ③   | CONNECTOR     | USB2.0 AF, PIN PLATED GOLD, WHITE INSULATION, SHELL PLATED NICKEL+PCB-FE1.1S                                                                                         | 1     | PCS  |
| ②   | CONNECTOR     | USB2.0 A MALE, GOLD PLATED PIN, WHITE INSULATION, NICKEL PLATED SHELL                                                                                                | 1     | PCS  |
| ①   | CABLE         | 7/0.12TC*1P+7/0.20TC*2C+AL+D(7/0.10TC)+B(64/0.12AL-MG), BLACK PVC JACKET, OD:4.5±0.2mm<br>MARKING: E***** 兄 AWM 2725 80℃ 30V VW-1 28AWG/1P AND 24AWG/2C USB2.0 CABLE | 15000 | MM   |
| NO. | MATERIAL      | DESCRIPTION                                                                                                                                                          | QTY.  | UNIT |

| Ltemref            | Quantity            | Title/Name, designation, material, dimension etc |           |                    | Article NO./Reference |              |              |
|--------------------|---------------------|--------------------------------------------------|-----------|--------------------|-----------------------|--------------|--------------|
| Designed by<br>FLY | Checkde by<br>HELEN | Approved by - date<br>2025.11.07                 | File name | Date<br>2025.11.07 | Scale<br>FREE         |              |              |
| ANGLE:             |                     |                                                  |           | USB2.0 AM-AF+IC    |                       |              |              |
| UNIT:MM            |                     |                                                  |           | 26-2931            |                       | Edition<br>1 | Sheet<br>1/1 |