



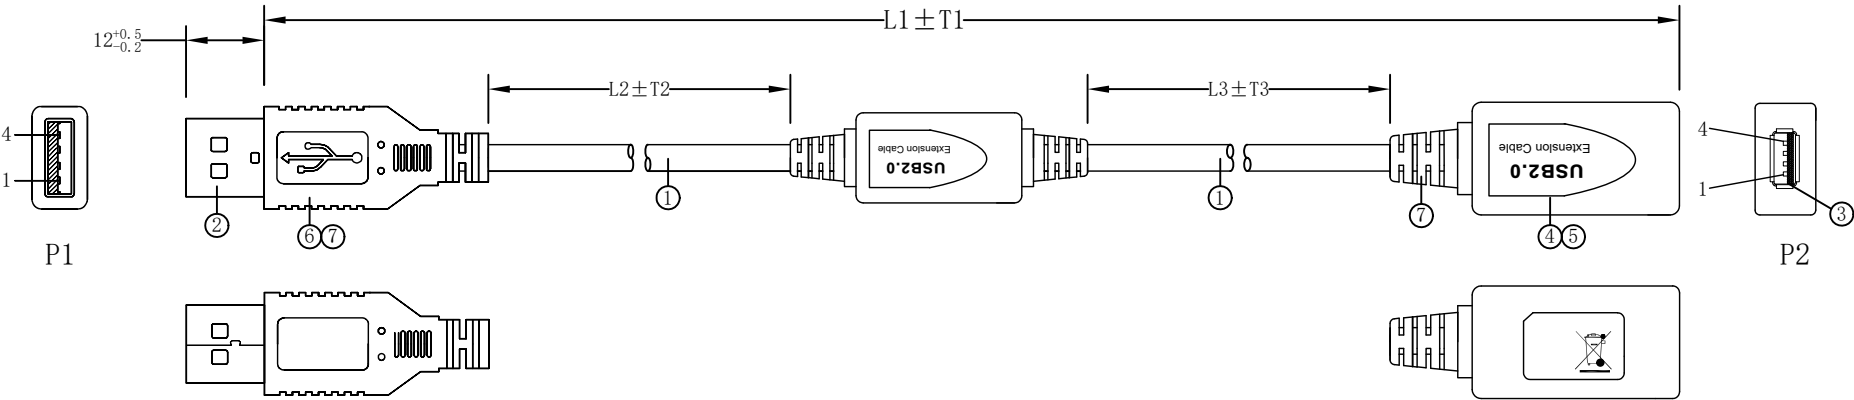

P/N	L1/mm	T1/mm	L2/mm	T2/mm	L3/mm	T3/mm
26-2932	20000	300	10000	100	10000	100

- NOTES:
- 1. OPEN/SHORT/INTERMITTENCE:100%.
 - 2. INSULATION RESISTANCE:DC 300V 0.01S 10MΩMin
 - 3. CONDUCTIVE RESISTANCE:10ΩMax
 - 4. ROHS & REACH COMPLIANT

PIN OUT

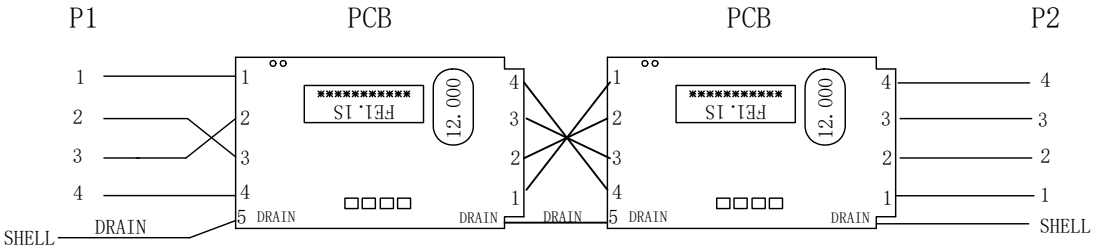

⑦	MOLDED	45P BLACK PVC		G							
⑥	MOLDED	LDPE		G							
⑤	PLASTIC SHELL	USB2.0 A FEMALE BLACK PLASTIC SHELL	2	SET							
④	PCBA	PCB-FE1.1S	2	PCS	Ltemref	Quantity	Title/Name, designation, material, dimension etc			Article NO./Reference	
③	CONNECTOR	USB2.0 AF, PIN PLATED GOLD, WHITE INSULATION, SHELL PLATED NICKEL+PCB-FE1.1S	1	PCS	Designed by FLY		Checkde by HELEN	Approved by - date 2025.11.07	File name	Date 2025.11.07	Scale FREE
②	CONNECTOR	USB2.0 A MALE, GOLD PLATED PIN, WHITE INSULATION, NICKEL PLATED SHELL	1	PCS							
①	CABLE	7/0.12TC*1P+7/0.20TC*2C+AL+D(7/0.10TC)+B(64/0.12AL-MG), BLACK PVC JACKET, OD:4.5±0.2mm MARKING: E***** 兄 AWM 2725 80℃ 30V VW-1 28AWG/1P AND 24AWG/2C USB2.0 CABLE	20000	MM	ANGLE: 					USB2.0 AM-AF+IC	
NO.	MATERIAL	DESCRIPTION	QTY.	UNIT	UNIT:MM					26-2932	