


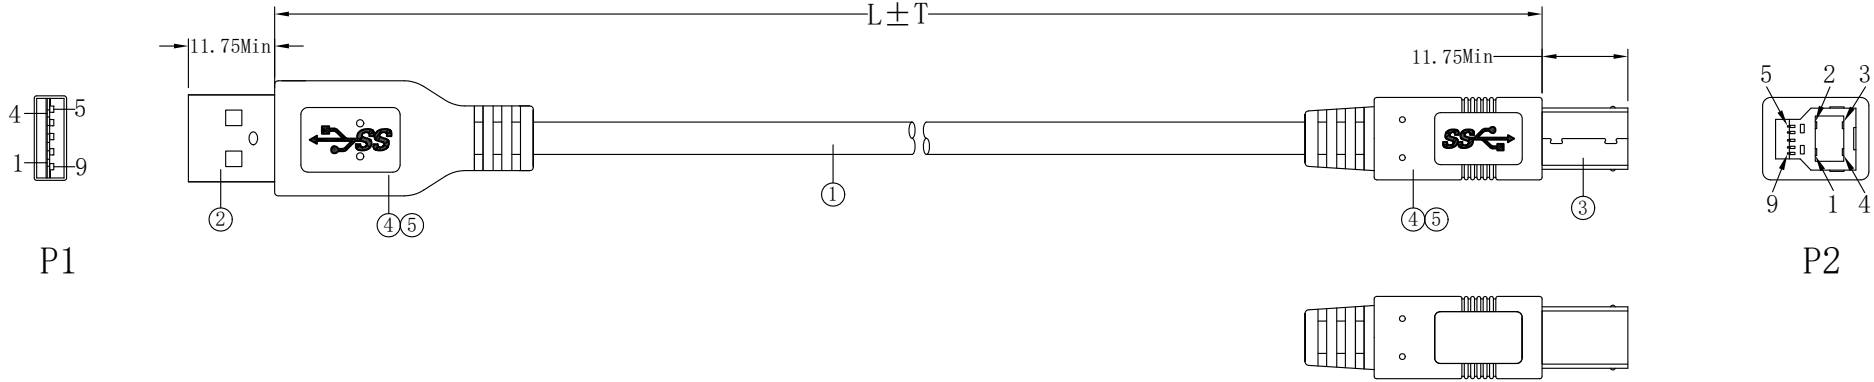


P/N	L/mm	T/mm
26-2952	2000	30

NOTES:

1. OPEN/SHORT/INTERMITTENCE:100%.
2. INSULATION RESISTANCE:DC 300V 0.01S 10MΩMin
3. CONDUCTIVE RESISTANCE:5ΩMax
4. PRACTICAL TEST:READ/WRITE SPEED≥3.1Gbps
5. ROHS & REACH COMPLIANT

PIN OUT

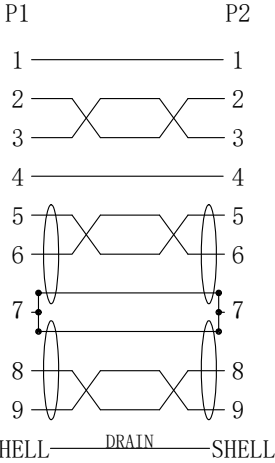

⑤	MOLDED	45P BLACK PVC		G								
④	MOLDED	LDPE		G								
③	CONNECTOR	USB3.0 B MALE, GOLD PLATED PIN, BLUE INSULATION, NICKEL PLATED SHELL	1	PCS	Ltemref	Quantity	Title/Name, designation, material, dimension etc			Article NO./Reference		
②	CONNECTOR	USB3.0 A MALE, GOLD PLATED PIN, BLUE INSULATION, NICKEL PLATED SHELL	1	PCS	Designed by FLY		Checkde by HELEN	Approved by - date 2025.11.12		File name	Date 2025.11.12	Scale FREE
①	CABLE	[7/0.12TC*1P+D(7/0.12TC)+FAM]*2C+7/0.12TC*1P+7/0.20TC*2C+AL+D(7/0.12BC)+B(96/0.12AM), BLACK PVC JACKET, OD:6.0±0.2mm MARKING:USB3.0 CABLE AWM 20276 80℃ 30V VW-1	2000	MM	ANGLE: 					USB3.0 AM TO BM		
NO.	MATERIAL	DESCRIPTION	QTY.	UNIT	UNIT:MM					26-2952		Edition 1