


P/N	L/mm	T/mm
26-2953	2000	30

- NOTES:
- 1. OPEN/SHORT/INTERMITTENCE:100%.
 - 2. INSULATION RESISTANCE:DC 300V 0.01S 10MΩMin
 - 3. CONDUCTIVE RESISTANCE:5ΩMax
 - 4. PRACTICAL TEST:READ/WRITE SPEED≥3.1Gbps
 - 5. ROHS & REACH COMPLIANT

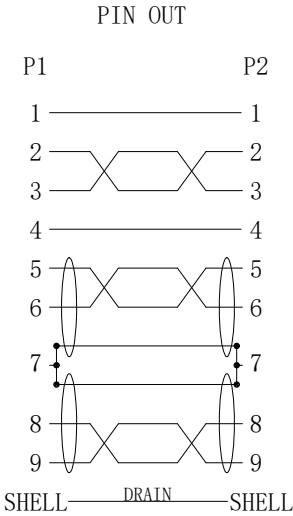

⑤	MOLDED	45P BLACK PVC		G							
④	MOLDED	LDPE		G							
③	CONNECTOR	USB3.0 A FEMALE, GOLD PLATED PIN, BLUE INSULATION, NICKEL PLATED SHELL	1	PCS	Ltemref	Quantity	Title/Name, designation, material, dimension etc		Article NO./Reference		
②	CONNECTOR	USB3.0 A MALE, GOLD PLATED PIN, BLUE INSULATION, NICKEL PLATED SHELL	1	PCS	Designed by FLY		Checkde by HELEN	Approved by - date 2025.11.12	File name	Date 2025.11.12	Scale FREE
①	CABLE	[7/0.12TC*1P+D(7/0.12TC)+FAM]*2C+7/0.12TC*1P+7/0.20TC*2C+AL+D(7/0.12BC)+B(96/0.12AM), BLACK PVC JACKET, OD:6.0±0.2mm MARKING:USB3.0 CABLE AWM 20276 80℃ 30V VW-1	2000	MM	ANGLE: 				USB3.0 AM TO AF		
NO.	MATERIAL	DESCRIPTION	QTY.	UNIT	UNIT:MM				26-2953		Edition 1