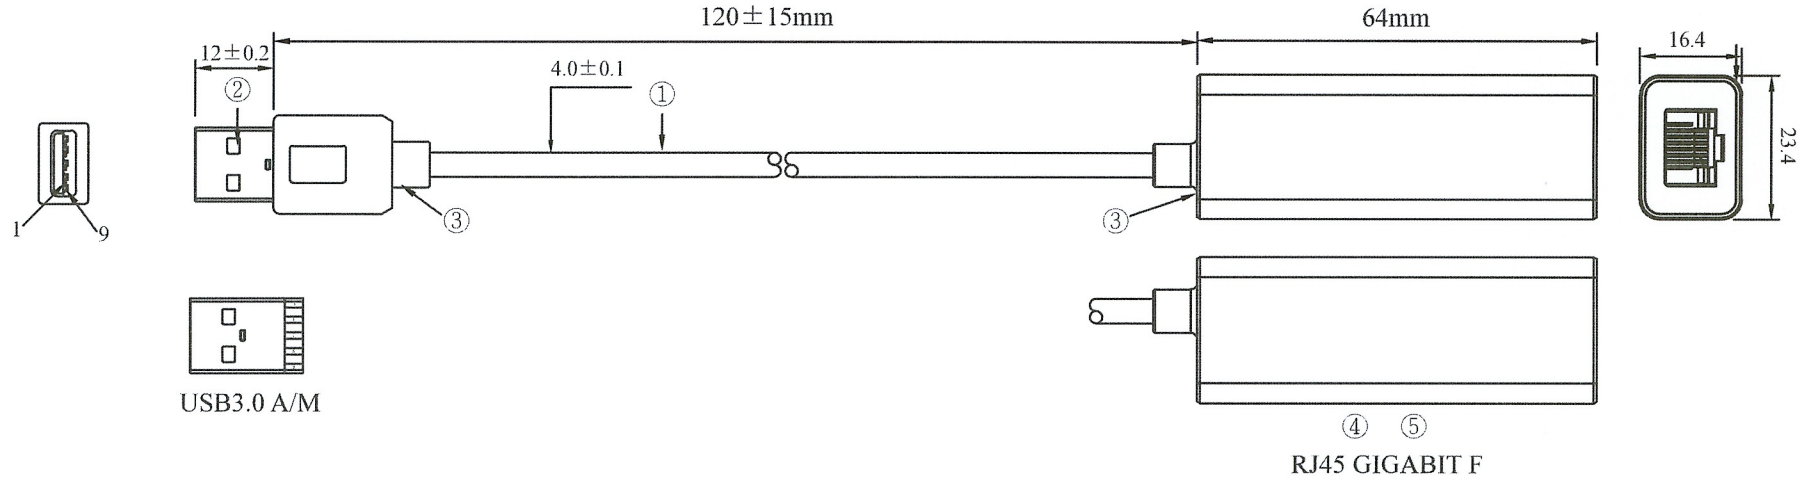

PIN ASSIGNMENT

USB3.0	1	2	3	4	5	6	7	8	9	Shell
PCBA	1	2	3	4	5	6	7	8	9	Shell
		TP			TP			TP		

1. OPEN/SHORT TEST 100% TEST
2. INSULATION: 20mm
3. RoHS Compliant

No.	Description	
⑤	Aluminum Silver (Black Insulator, Nickel Plated)	1 PCS
④	RJ45 GIGABIT Female PCBA: BH-U3RJ45	1 PCS
③	White 45P PVC	1 PCS
②	USB3.0 AM Metal Connector (Blue Insulator, Nickel Plated)	1 PCS
①	(32# x 1P + DAM)x2 + 32# + 1P + 26#2C + AS White OD = 4.0±0.1mm	1 PCS

11/5/2018

Company	Netifo	Goods Code					
ITEM NO.	26-2970(U3J)	Drawing Evidence		Draw		Date	2018.05.07
				Check		Date	
Description	USB3.0 to RJ45 GIGABIT			Approval		Date	

NETIFO

D		
C		
B		
VER.A	REVISE	Date