



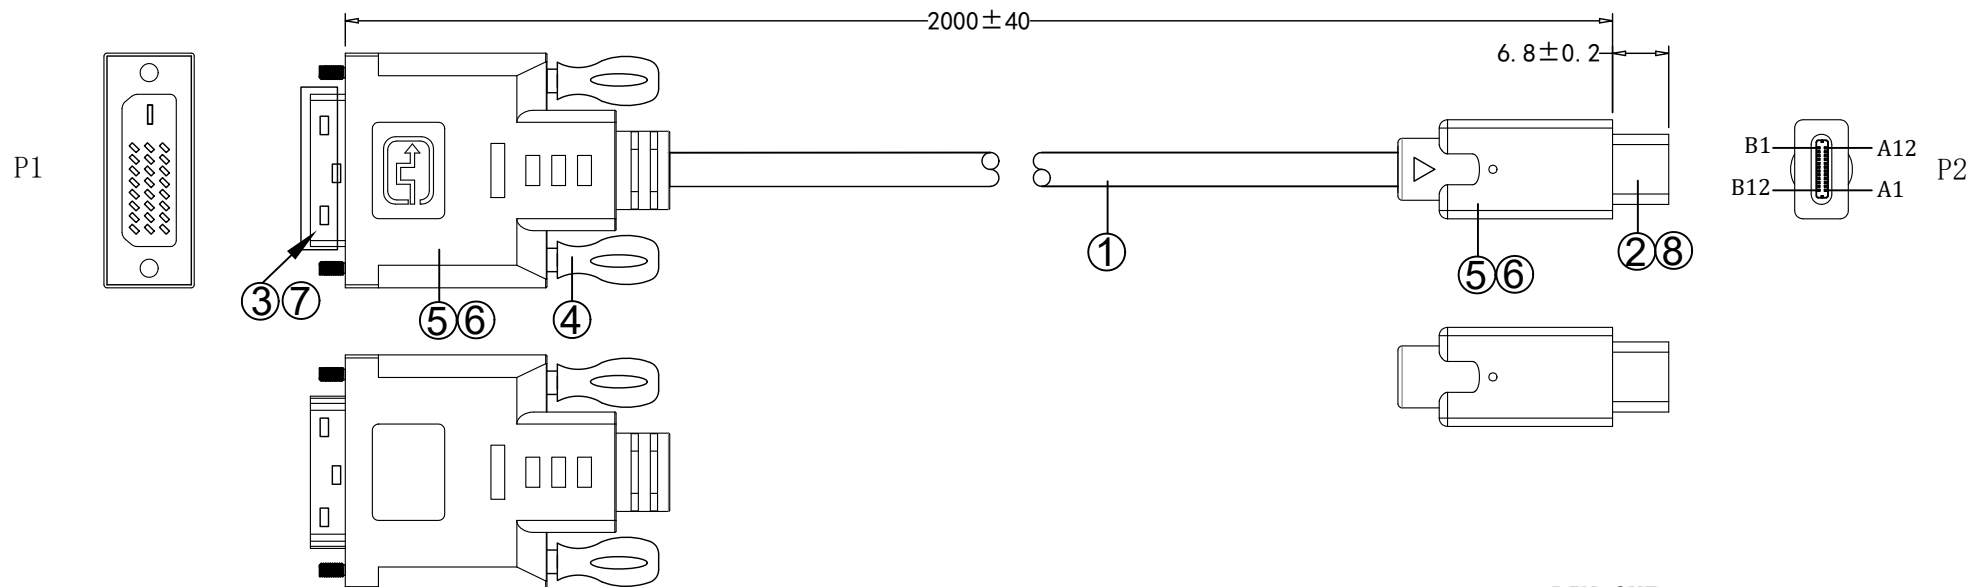

NOTES:
1. Resolution: 1920*1080P@60Hz
2. RoHS & REACH COMPLIANT

PIN OUT

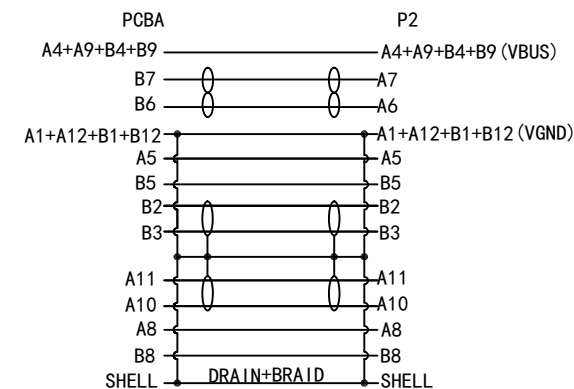

⑧	DUST CAP	TYPE C MALE DUST CAP	1	PCS
⑦	DUST CAP	DVI MALE DUST CAP	1	PCS
⑥	MOLDED	45P BLACK PVC		G
⑤	MOLDED	LDPE		G
④	THUMB SCREW	#40-40 B-L38, BLACK PVC	2	PCS
③	CONNECTOR	TYPE CM TO DVI (24+1)M PCBA, THE PIN GOLD PLATED, BLACK INSULATION, GOLD PLATED SHELL+IC:RTD2171	1	PCS
②	CONNECTOR	TYPE C MALE, THE PIN GOLD PLATED, BLACK INSULATION, GOLD PLATED SHELL	1	PCS
①	CABLE	[(7/0.08TC)*1P+D+AL+MY]*2C+(7/0.08TC)*1P+(7/0.08TC)*4C+(7/0.16TC)*2C +AB BLACK PVC JACKET, OD:4.5±0.2MM MARKING:E***** 兄 AWM STYLE 2725 80℃ 30V VW-1 SUPER HIGH SPEED USB Revision 3.1	2000	MM
NO.	MATERIAL	DESCRIPTION	QTY.	UNIT

Ltemref	Quantity	Title/Name, designation, material, dimension etc			Article NO./Reference		
Designed by FLY		Checkde by HELEN	Approved by - date 2025. 10. 23	File name	Date 2025. 10. 23	Scale FREE	
ANGLE: 					TYPE C/M to DVI (24+1)/M		
UNIT:MM					26-2994		Edition 1