



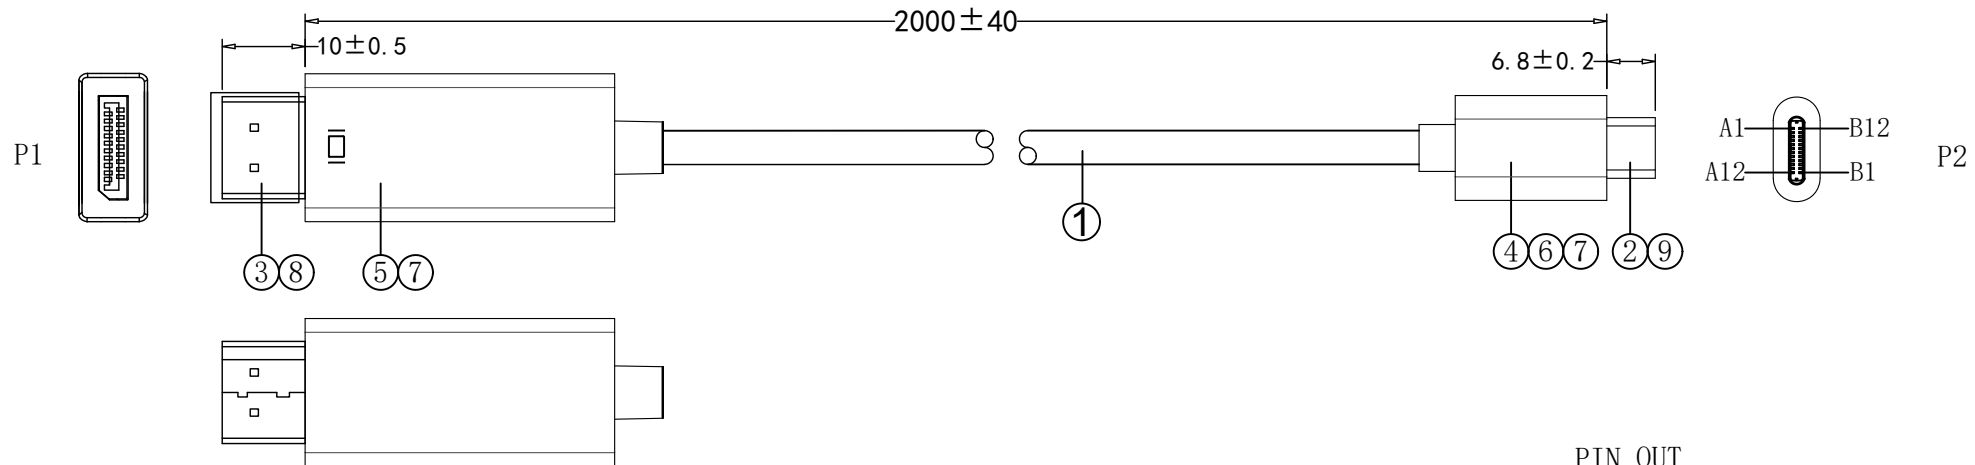

NOTES:
1. Resolution: 4K*2K@60HZ.
2. RoHS & REACH COMPLIANT

PIN OUT

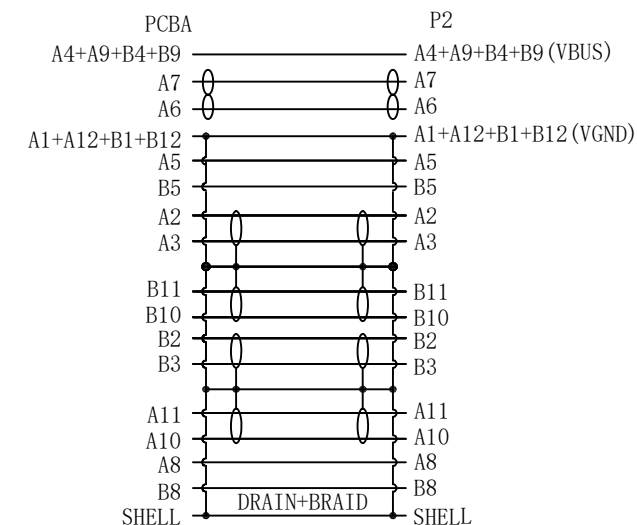

⑨	DUST CAP	TYPE C MALE DUST CAP	1	PCS
⑧	DUST CAP	DP MALE DUST CAP	1	PCS
⑦	MOLDED	45P BLACK PVC		G
⑥	MOLDED	LDPE		G
⑤	PLASTIC HOOD	DP 20P M BLACK PLASTIC HOOD	1	SET
④	PLASTIC HOOD	TYPE CM BLACK PLASTIC HOOD	1	SET
③	CONNECTOR	TYPE CM TO DP 20P M PCBA, THE PIN GOLD PLATED, BLACK INSULATION, GOLD PLATED SHELL+IC:CYPD2119	1	PCS
②	CONNECTOR	TYPE C MALE, THE PIN GOLD PLATED, BLACK INSULATION, GOLD PLATED SHELL	1	PCS
①	CABLE	[(7/0.08TC)*1P+D+AL+MY]*2C+(7/0.08TC)*1P+(7/0.08TC)*4C+(7/0.16TC)*2C +AB BLACK PVC JACKET, OD: 4.5±0.2MM MARKING: E***** 兄 AWM STYLE 2725 80℃ 30V VW-1 SUPER HIGH SPEED USB Revision 3.1	2000	MM
NO.	MATERIAL	DESCRIPTION	QTY.	UNIT

Ltemref	Quantity	Title/Name, designation, material, dimension etc			Article NO./Reference		
Designed by FLY		Checkde by HELEN	Approved by - date 2025. 10. 22	File name	Date 2025. 10. 22	Scale FREE	
ANGLE: 					TYPE C/M to DP/M 4K@60Hz		
UNIT:MM					26-2995		Edition 1