


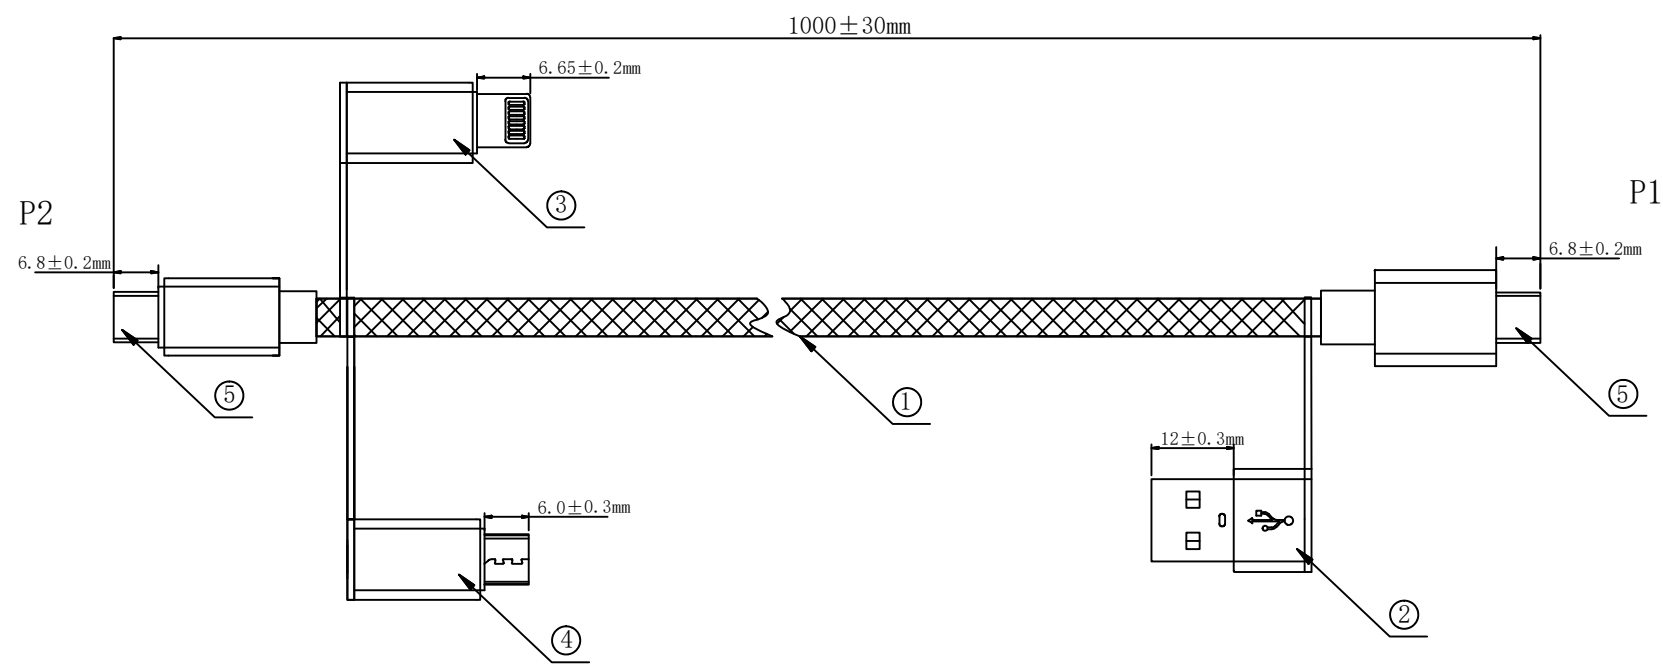

Test requirements:

- 1.100% short circuit malposition test
- 2.Both sides 100 % test
- 3.RoHS & REACH COMPLIANT

PIN OUT			
P2			P1
V	RED		V
D-	WHITE		D-
D+	GREEN		D+
CC	DRAIN		CC
G	BLACK		G

⑩	ALUMI SHELL	TYPE C FEMALE ALUMI SHELL ADAPTER COLOR BLACK	1	PCS
⑨	ALUMI SHELL	TYPE C ALUMI SHELL ADAPTER COLOR BLACK	1	PCS
⑧	ALUMI SHELL	TYPE C INPUT ALUMI SHELL COLOR BLACK	1	PCS
⑦	ALUMI SHELL	USB A MALE ALUMI SHELL COLOR BLACK	1	PCS
⑥	MOLDED	45P BLACK PVC		G
⑤	PLUG	TYPE C MALE THE PIN GOLD PLATED, BLACK INSULATION, NICKEL PLATED SHELL	1	PCS
④	PLUG	TYPE C FEMALE TO MICRO MALE ADAPTER	1	PCS
③	PLUG	TYPE C FEMALE TO 8 PIN IOS	1	PCS
②	PLUG	TYPE C FEMALE TO USB A MALE PCBA	1	PCS
①	CABLE	43/0. 10TS*2C+10/0. 10TS*1P+D(10/0. 10TC)*1D BLACK BRAID OD 3. 8±0. 1mm	1	PCS
NO.	MATERIAL	DESCRIPTION	QTY.	UNIT

Ltemref	Quantity	Title/Name, designation, material, dimension etc			Article NO. /Reference		
Designed by FLY		Checkde by HELEN	Approved by - date 2025. 10. 23	File name	Date 2025. 10. 23	Scale FREE	
ANGLE:				USB 3 In 1 Charge And Sync Cable			
UNIT:MM				26-2996	Edition 1	Sheet 1/1	