


P/N	L/mm	T/mm
26-2998	1000	20
26-2999	2000	30

NOTES:

1. Open/Short/Intermittence: 100%
2. DATA SPEED:5Gbps MAX
3. RoHS & REACH COMPLIANT

PIN OUT

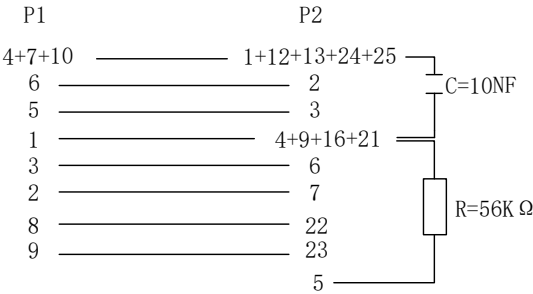

⑤	MOLDED	45P BLACK PVC		G	Itemref Quantity Title/Name, designation, material, dimension etc Article NO./Reference Designed by HELEN Checkde by HELEN Approved by - date 2025. 10. 27 File name Date 2025. 10. 27 Scale FREE				
④	MOLDED	LDPE		G					
③	CONNECTOR	USB3.1 C MALE, PIN GOLD PLATED, BLACK INSULATION, SHELL PLATED NICKEL	1	PCS					
②	CONNECTOR	USB3.0 A MALE, PIN GOLD PLATED, BLUE INSULATION, SHELL PLATED NICKEL	1	PCS					
①	CABLE	USB3.0[(7/0.10TC*1P+D(7/0.10TC)+AL)]*2C+7/0.10TC*1P+7/0.20TC*2C+AL+D(1/0.254BC)+B(16*4/0.12AL-MG), BLACK PVC JACKET, OD:4.5±0.2MM MARKING:USB3.0 CABLE AWM 20276 80℃ 30V VW-1	L	MM	ANGLE:	USB3.0 AM to TYPE C			
NO.	MATERIAL	DESCRIPTION	QTY.	UNIT	UNIT:MM				
					26-299X		Edition 1	Sheet 1/1	