



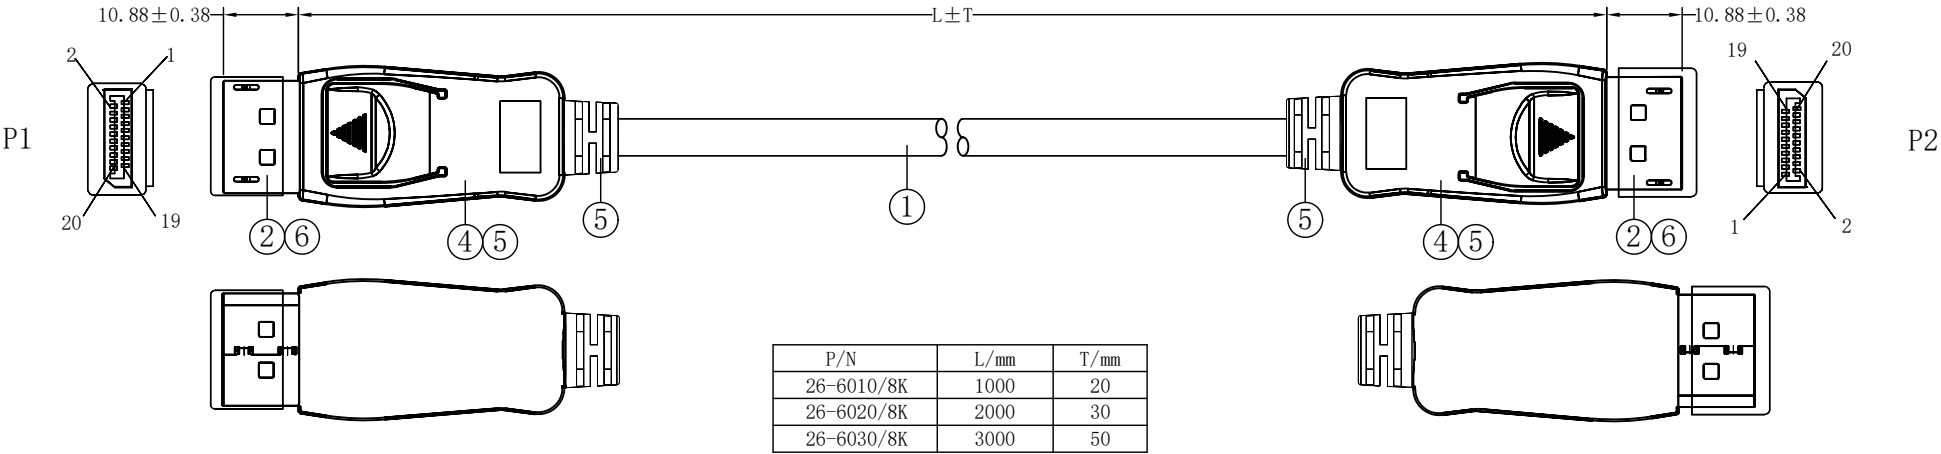

PIN OUT

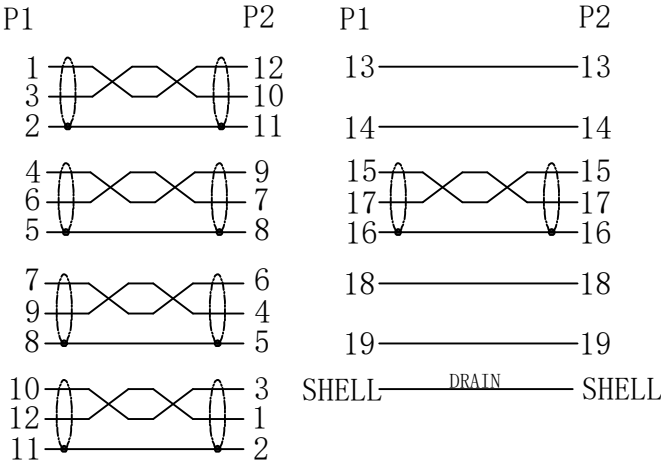

- NOTES:
1. OPEN/SHORT/INTERMITTENCE:100%.
 2. INSULATION RESISTANCE:DC 300V 0.01S 10MΩ Min
 3. CONDUCTIVE RESISTANCE:5Ω Max
 4. RESOLUTION:8K*4K@60Hz
 5. RoHS & REACH COMPLIANT

⑥	DUST CAP	DP MALE DUST CAP	2	PCS
⑤	MOLDED	45P BLACK PVC		G
④	MOLDED	LDPE		G
③	PLASTIC HOOD	DP MALE BLACK PLASTIC HOOD	2	SET
②	CONNECTOR	DP 20PIN MALE, PIN PLATED GOLD, BLACK INSULATION, GOLD PLATED SHELL+TINPLATE SHIELDING SHELL	2	PCS
①	CABLE	(7/0.10TC*1P+7/0.10TC+FAM)*5C+7/0.10TC*4C+AL-FOIL+D(7/0.10BC)+B(16*7/0.12AL-MG), BLACK PVC JACKET, OD:6.0±0.2MM, MARKING: DisplayPort Cable E***** 兄 AWM STYLE 20276 80℃ 30V VW-1	L	MM
NO.	MATERIAL	DESCRIPTION	QTY.	UNIT

Ltemref	Quantity	Title/Name, designation, material, dimension etc			Article NO./Reference		
Designed by FLY		Checkde by HELEN	Approved by - date 2025. 10. 28	File name	Date 2025. 10. 28	Scale FREE	
ANGLE: 				DP1.4 M-M			
UNIT:MM				26-60X0/8K		Edition 1	Sheet 1/1