


P/N	L/mm	T/mm
26-6010	1000	30
26-6020	2000	40
26-6030	3000	50

- NOTES:
- 1. OPEN/SHORT/INTERMITTENCE:100%.
 - 2. INSULATION RESISTANCE:DC 300V 0.01S 10MΩMin
 - 3. CONDUCTIVE RESISTANCE:2ΩMax
 - 4. RoHS & REACH COMPLIANT

PIN OUT

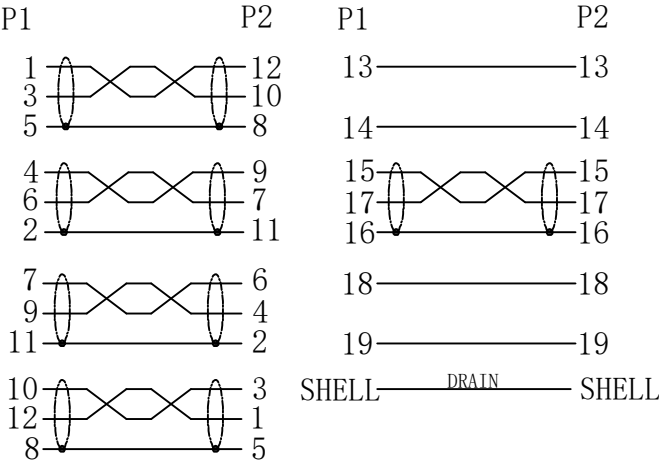

⑥	DUST CAP	DP MALE DUST CAP	2	PCS	<table><tr><td>Ltemref</td><td>Quantity</td><td colspan="3">Title/Name, designation, material, dimension etc</td><td colspan="2">Article NO. /Reference</td></tr><tr><td colspan="2">Designed by FLY</td><td>Checkde by HELEN</td><td>Approved by - date 2025. 10. 28</td><td>File name</td><td>Date 2025. 10. 28</td><td>Scale FREE</td></tr><tr><td colspan="2">ANGLE: </td><td colspan="3" rowspan="2"></td><td colspan="2">DP1.2 M-M</td></tr><tr><td colspan="2">UNIT:MM</td><td colspan="2">26-60X0</td><td>Edition 1</td><td>Sheet 1/1</td></tr></table>	Ltemref	Quantity	Title/Name, designation, material, dimension etc			Article NO. /Reference		Designed by FLY		Checkde by HELEN	Approved by - date 2025. 10. 28	File name	Date 2025. 10. 28	Scale FREE	ANGLE:					DP1.2 M-M		UNIT:MM		26-60X0		Edition 1	Sheet 1/1
Ltemref	Quantity	Title/Name, designation, material, dimension etc				Article NO. /Reference																										
Designed by FLY		Checkde by HELEN	Approved by - date 2025. 10. 28	File name		Date 2025. 10. 28	Scale FREE																									
ANGLE:						DP1.2 M-M																										
UNIT:MM						26-60X0		Edition 1	Sheet 1/1																							
⑤	MOLDED	45P BLACK PVC		G																												
④	MOLDED	LDPE		G																												
③	PLASTIC HOOD	DP MALE BLACK PLASTIC HOOD	2	SET																												
②	CONNECTOR	DP 20PIN MALE, PIN PLATED GOLD, BLACK INSULATION, GOLD PLATED SHELL	2	PCS																												
①	CABLE	(1/0. 254BC*1P+1/0. 254BC+FAM)*5C+1/0. 254BC*4C+AL+D(1/0. 254BC)+B(80/0. 12AL-MG), BLACK PVC JACKET, OD:6. 0±0. 2MM, MARKING: DisplayPort Cable E***** 兄 AWM STYLE 20276 80℃ 30V VW-1	L	MM																												
NO.	MATERIAL	DESCRIPTION	QTY.	UNIT																												