


P/N	L/mm	T/mm
26-6050	5000	50

- NOTES:
- 1. OPEN/SHORT/INTERMITTENCE:100%.
 - 2. INSULATION RESISTANCE:DC 300V 0.01S 10MΩMin
 - 3. CONDUCTIVE RESISTANCE:5ΩMax
 - 4. RoHS & REACH COMPLIANT

PIN OUT

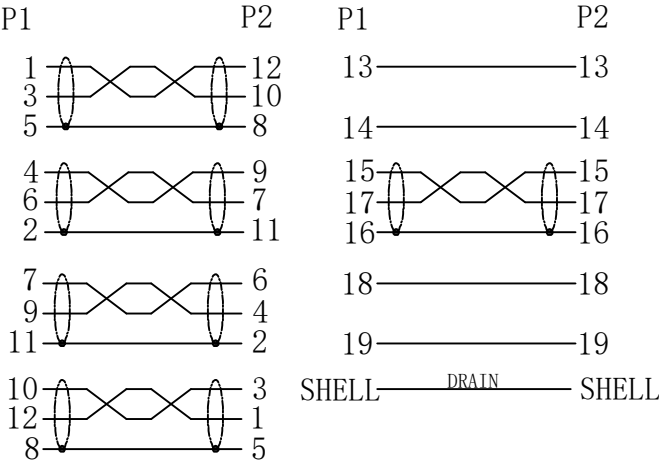

⑥	DUST CAP	DP MALE DUST CAP	2	PCS
⑤	MOLDED	45P BLACK PVC		G
④	MOLDED	LDPE		G
③	PLASTIC HOOD	DP MALE BLACK PLASTIC HOOD	2	SET
②	CONNECTOR	DP 20PIN MALE,PIN PLATED GOLD,BLACK INSULATION,GOLD PLATED SHELL	2	PCS
①	CABLE	(7/0.12TC*1P+D+FAM)*5C+7/0.12TC*4C+AL-FOIL+D(1/0.254BC)+B(80/0.12AL-MG),BLACK PVC JACKET,OD:7.3±0.2MM,MARKING: DisplayPort Cable E***** 兄 AWM STYLE 20276 80℃ 30V VW-1	5000	MM
NO.	MATERIAL	DESCRIPTION	QTY.	UNIT

Ltemref	Quantity	Title/Name, designation, material, dimension etc			Article NO./Reference		
Designed by FLY	Checkde by HELEN	Approved by - date 2025. 10. 29	File name	Date 2025. 10. 29	Scale FREE		
ANGLE: 			DP1.2 M-M				
UNIT:MM			26-6050		Edition 1	Sheet 1/1	