


P/N	L/mm	T/mm
26-70054K	500	15
26-70104K	1000	20
26-70204K	2000	30
26-70304K	3000	50

NOTES:

1. OPEN/SHORT/INTERMITTENCE:100%.
2. INSULATION RESISTANCE:DC 300V 0.01S 10MΩ MIN
3. CONDUCTIVE RESISTANCE:5 Ω MAX
4. RESOLUTION:4K*2K@60HZ.
5. ROHS & REACH COMPLIANT

PIN OUT

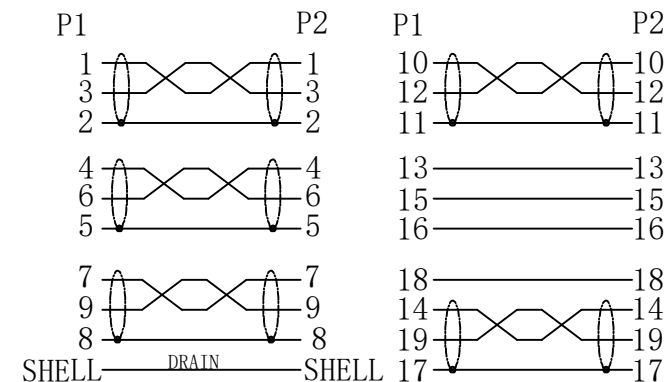

⑤	DUST CAP	HDMI A MALE DUST CAP	2	PCS	Ltemref	Quantity	Title/Name, designation, material, dimension etc			Article NO./Reference		
④	MOLDED	45P BLACK PVC		G								
③	MOLDED	LDPE		G	Designed by FLY		Checkde by HELEN	Approved by - date 2025. 10. 31	File name	Date 2025. 10. 31	Scale FREE	
②	CONNECTOR	HDMI 19PIN MALE THE PIN GOLD PLATED, BLACK INSULATION, GOLD PLATED SHELL	2	PCS								
①	CABLE	(1/0. 254BC*1P+1/0. 254CCS+AM)*5+1/0. 254BC*4C+AL-FOIL+D(1/0. 254BC)+B(64/0. 12AL-MG), BLACK PVC JACKET, OD:6.0±0.2MM, MARKING: High Speed HDMI [®] Cable with Ethernet	L	MM	ANGLE: 					HDMI2.0 AM-AM 4K*2K@60Hz		
NO.	MATERIAL	DESCRIPTION	QTY.	UNIT	UNIT:MM							