



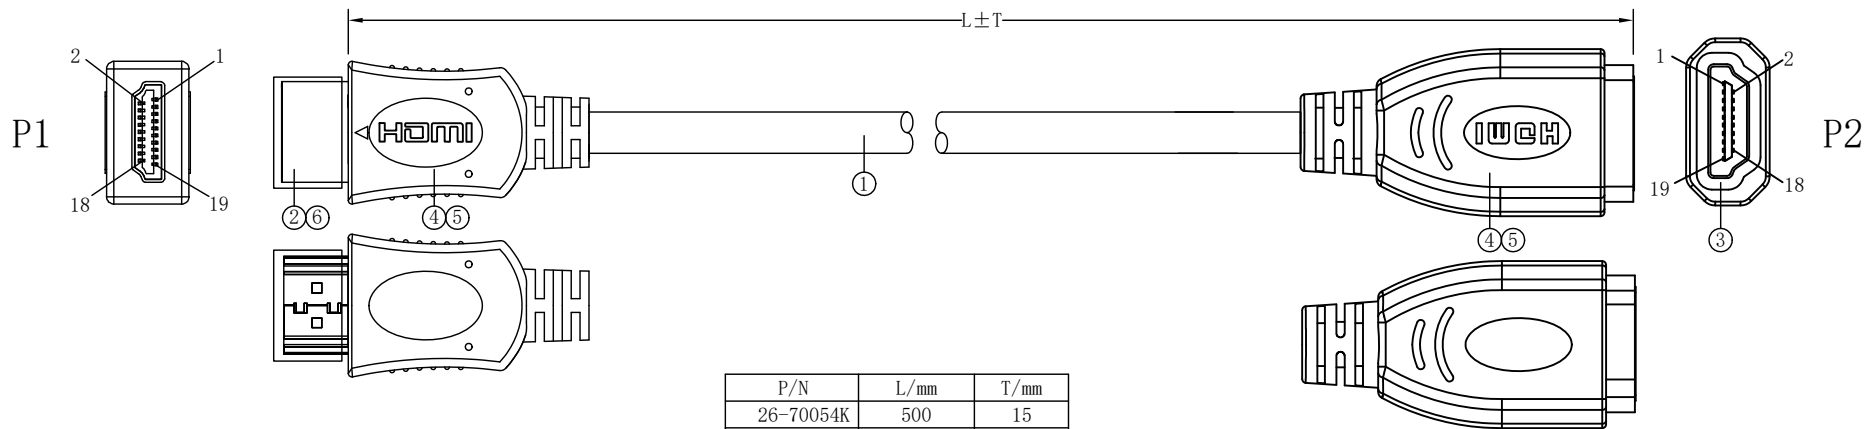

NOTES:

- 1. OPEN/SHORT/INTERMITTENCE:100%.
- 2. INSULATION RESISTANCE:DC 300V 0.01S 10MΩ MIN
- 3. CONDUCTIVE RESISTANCE:5 Ω MAX
- 4. RESOLUTION:4K*2K@60HZ.
- 5. ROHS & REACH COMPLIANT

PIN OUT

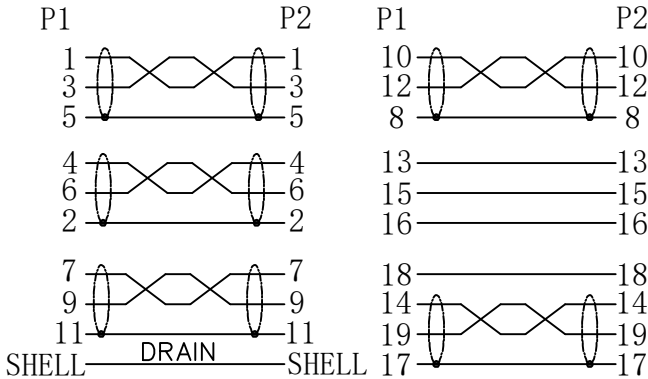

⑥	DUST CAP	HDMI A MALE DUST CAP	1	PCS
⑤	MOLDED	45P BLACK PVC		G
④	MOLDED	LDPE		G
③	CONNECTOR	HDMI 19PIN FEMALE THE PIN GOLD PLATED,BLACK INSULATION,GOLD PLATED SHELL	1	PCS
②	CONNECTOR	HDMI 19PIN MALE THE PIN GOLD PLATED,BLACK INSULATION,GOLD PLATED SHELL	1	PCS
①	CABLE	(1/0. 32BC*1P+1/0. 32BC+AM)*5+1/0. 254BC*4C+AL-FOIL+D(1/0. 32BC)+B(80/0. 12AL-MG),BLACK PVC JACKET,OD:7.3±0.2MM,MARKING: High Speed HDMI Cable with Ethernet	L	MM
NO.	MATERIAL	DESCRIPTION	QTY.	UNIT

Ltemref	Quantity	Title/Name, designation, material, dimension etc			Article NO./Reference		
Designed by FLY	Checkde by HELEN	Approved by - date 2025. 11. 03	File name	Date 2025. 11. 03	Scale FREE		
ANGLE: 			HDMI2.0 AM-AF 4K*2K@60Hz				
UNIT:MM			26-70XX4K/MF		Edition 1	Sheet 1/1	