



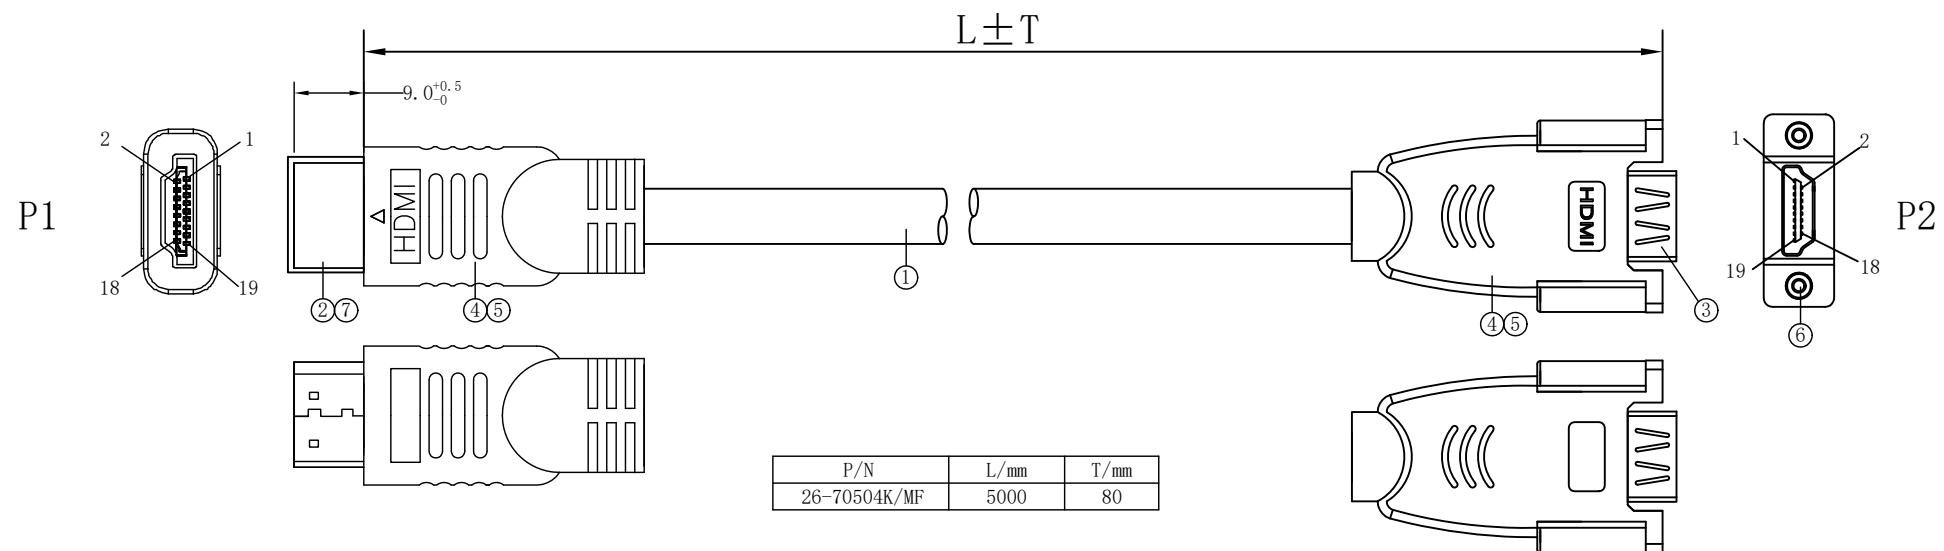

NOTES:

1. OPEN/SHORT/INTERMITTENCE:100%.
2. INSULATION RESISTANCE:DC 300V 0.01S 10MΩ MIN
3. CONDUCTIVE RESISTANCE:5 Ω MAX
4. RESOLUTION:4K*2K@60HZ.
5. ROHS & REACH COMPLIANT

PIN OUT

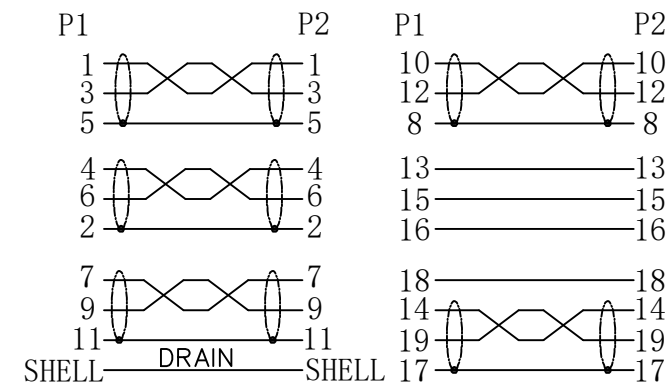

⑦	DUST CAP	HDMI A MALE DUST CAP	1	PCS
⑥	NUT	NUT NICKEL PLATED#4-40UNC	2	PCS
⑤	MOLDED	45P BLACK PVC		G
④	MOLDED	LDPE		G
③	CONNECTOR	HDMI 19PIN FEMALE THE PIN GOLD PLATED,BLACK INSULATION,GOLD PLATED SHELL	1	PCS
②	CONNECTOR	HDMI 19PIN MALE THE PIN GOLD PLATED,BLACK INSULATION,GOLD PLATED SHELL	1	PCS
①	CABLE	[(1/0.511BC*1P+D(1/0.32BC)+AM/MY)]*5C+1/0.254BC*3C+1/0.511BC*1C+AL+D(1/0.32BC)+B(128/0.12AL-MG),BLACK PVC JACKET OD:9.5±0.2mmMARKING: 4Kx2K(2160P)Ultra-High Definition • 3D Cable High Speed HDMI™ Cable with Ethernet E***** 兄 AWM 20276 80℃ 30V VW-1	L	MM
NO.	MATERIAL	DESCRIPTION	QTY.	UNIT

Ltemref	Quantity	Title/Name, designation, material, dimension etc			Article NO./Reference		
Designed by FLY		Checkde by HELEN	Approved by - date 2025. 11. 06	File name	Date 2025. 11. 06	Scale FREE	
ANGLE: 					HDMI2.0 AM-AF 4K*2K@60Hz		
UNIT:MM					26-70504K/MF		Edition 1