



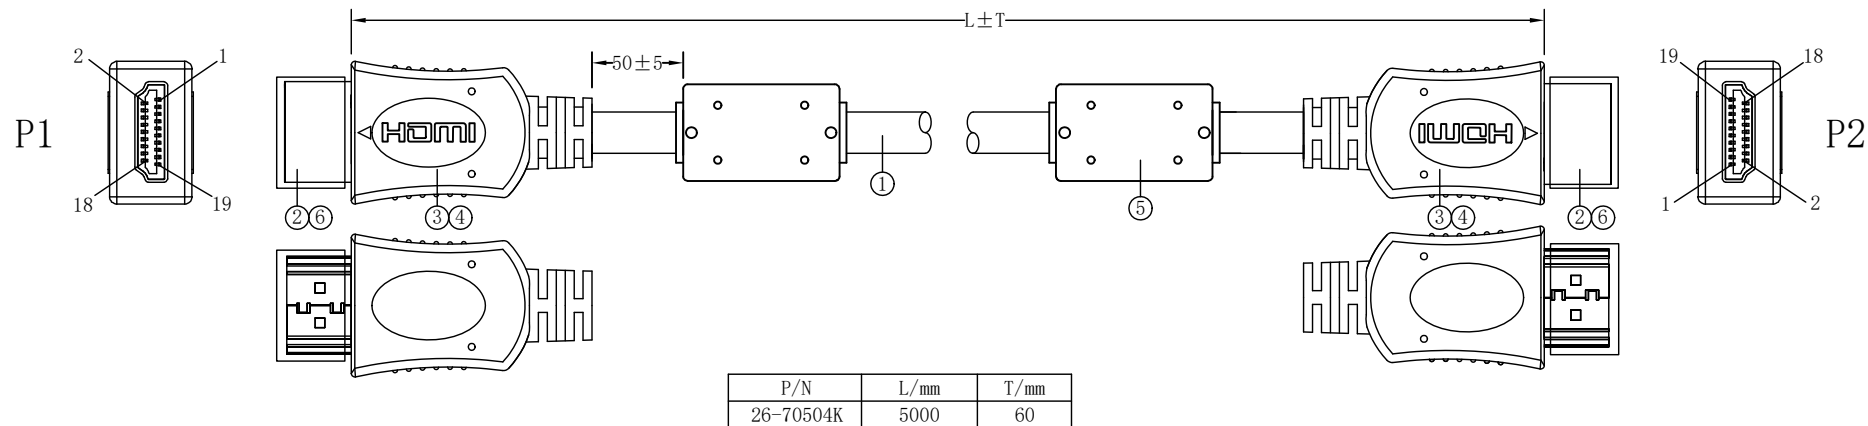


NOTES:

1. OPEN/SHORT/INTERMITTENCE:100%.
2. INSULATION RESISTANCE:DC 300V 0.01S 10MΩ MIN
3. CONDUCTIVE RESISTANCE:3Ω MAX
4. RESOLUTION:4K*2K@60HZ
5. ROHS & REACH COMPLIANT

PIN OUT

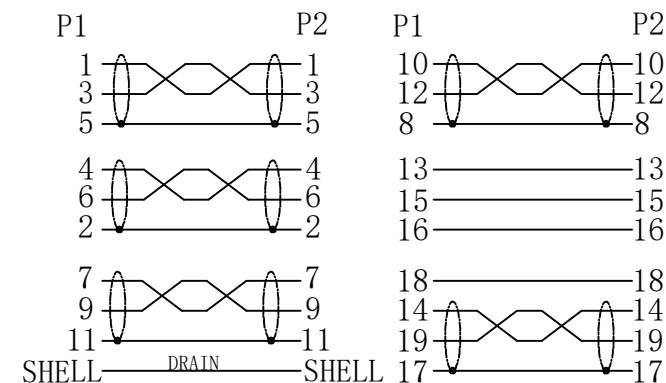

⑥	DUST CAP	HDMI A MALE DUST CAP	2	PCS
⑤	FERRITR	SIZE:28. 5* ϕ 14. 2* ϕ 8MM	2	PCS
④	MOLDED	45P BLACK PVC		G
③	MOLDED	LDPE		G
②	CONNECTOR	HDMI 19PIN MALE THE PIN GOLD PLATED,BLACK INSULATION,GOLD PLATED SHELL	2	PCS
①	CABLE	(1/0. 32BC*1P+1/0. 254BC+FAM)*5+1/0. 254BC*4C+AL-FOIL+D(1/0. 254BC)+B(80/0. 12AL-MG),BLACK PVC JACKET, OD:7. 3±0. 2MM, MARKING:4Kx2K(2160P) Ultra-High Definition • 3D Cable High Speed HDMI™ CABLE	L	MM
NO.	MATERIAL	DESCRIPTION	QTY.	UNIT

Ltemref	Quantity	Title/Name, designation, material, dimension etc			Article NO./Reference		
Designed by FLY		Checkde by HELEN	Approved by - date 2025. 11. 03	File name	Date 2025. 11. 03	Scale FREE	
ANGLE: 					HDMI2. 0 AM-AM 4K*2K@60Hz		
UNIT:MM					26-70504K		Edition 1