



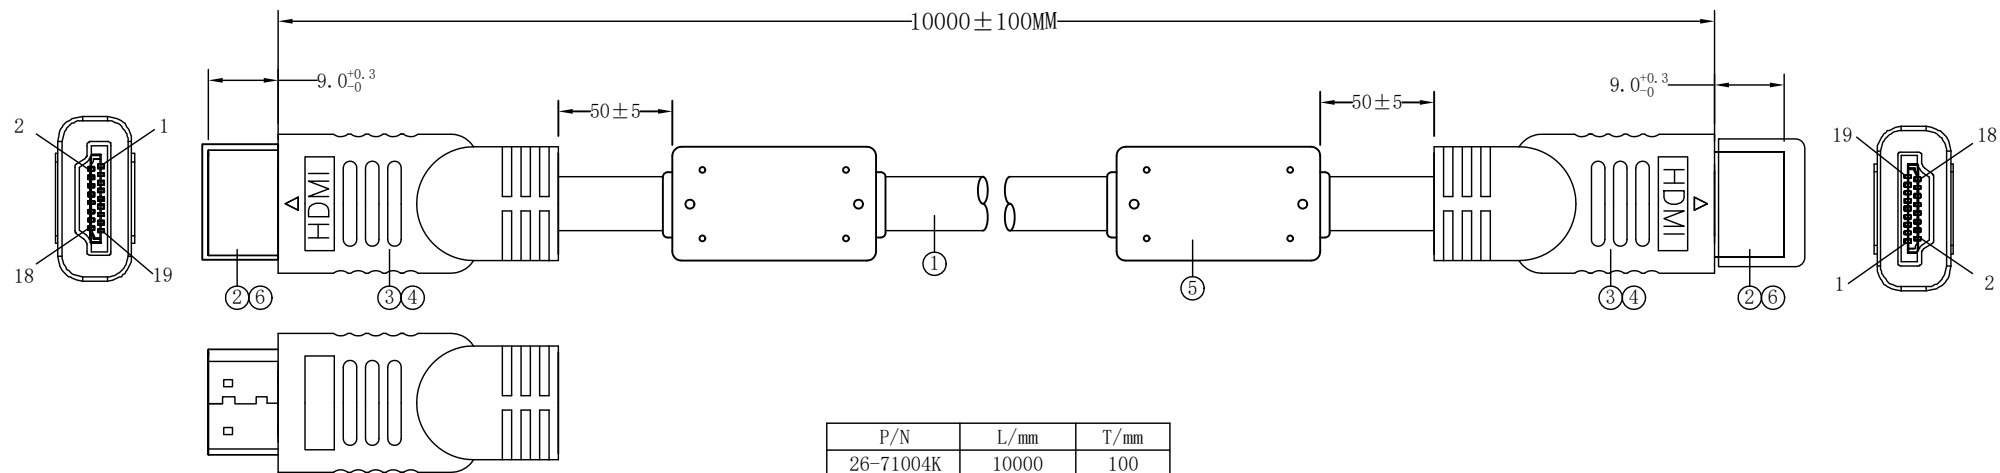

NOTES:

1. OPEN/SHORT/INTERMITTENCE: 100%.
2. INSULATION RESISTANCE: DC 300V 0.01S 10MΩ MIN
3. CONDUCTIVE RESISTANCE: 15Ω MAX
4. RESOLUTION: 4K*2K@60HZ
5. ROHS & REACH COMPLIANT

PIN OUT

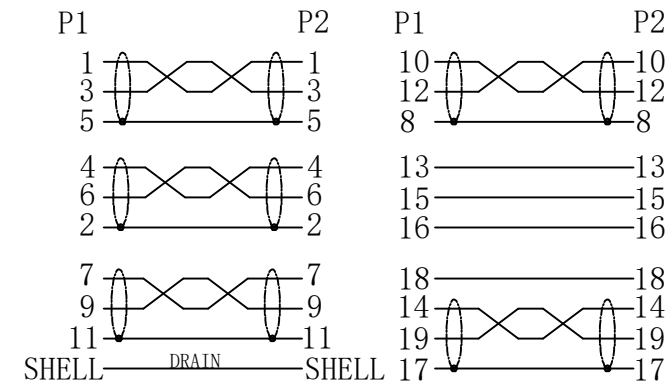

⑥	DUST CAP	HDMI A MALE DUST CAP	2	PCS
⑤	FERRIT RING	FERRITE MAGNETIC RING RH14. 2*28. 5*10MM	2	PCS
④	MOLDED	45P BLACK PVC		G
③	MOLDED	LDPE		G
②	CONNECTOR	HDMI A MALE, GOLD PLATED PIN, BLACK INSULATION, GOLD PLATED SHELL	2	PCS
①	CABLE	[(1/0. 45BC)*1P+D(1/0. 32BC)+AL/MYLAR]*5+1/0. 254BC*3C+1/0. 45BC*1C+AL+D(1/0. 32BC)+B(128/0. 12AL-MG), BLACK PVC JACKET, OD:9. 0±0. 2MM MARKING: 4K×2K(2160P)Ultra-High Definition • 3D Cable High Speed HDMI® Cable with Ethernet E***** 兄 AWM 20276 80℃ 30V VW-1	10000	MM
NO.	MATERIAL	DESCRIPTION	QTY.	UNIT

Ltemref	Quantity	Title/Name, designation, material, dimension etc			Article NO./Reference		
Designed by FLY		Checkde by HELEN	Approved by - date 2025. 11. 06	File name	Date 2025. 11. 06	Scale FREE	
ANGLE: 					HDMI2.0 AM-AM 4K*2K@60Hz		
UNIT:MM					26-71004K		Edition 1