


P/N	L/mm	T/mm
26-7181	1000	30
26-7188	2000	40

PIN OUT

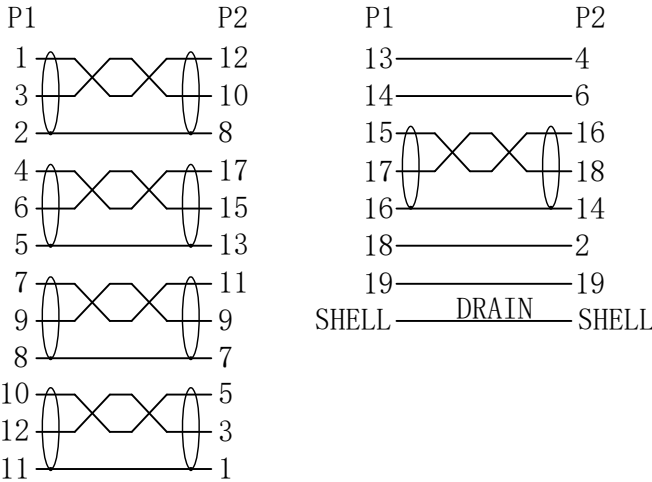

- NOTES:
- 1. OPEN/SHORT/INTERMITTENCE:100%.
 - 2. INSULATION RESISTANCE:DC 300V 0.01S 10MΩ Min
 - 3. CONDUCTIVE RESISTANCE:5 Ω Max
 - 4. RESOLUTION:4K*2K@60Hz
 - 5. RoHS & REACH COMPLIANT

⑨	DUST CAP	MINI DP MALE DUST CAP	1	PCS
⑧	DUST CAP	DP MALE DUST CAP	1	PCS
⑦	MOLDED	45P BLACK PVC		G
⑥	MOLDED	LDPE		G
⑤	PLASTIC HOOD	MINI DP MALE BLACK PLASTIC HOOD	1	SET
④	PLASTIC HOOD	DP MALE BLACK PLASTIC HOOD	1	SET
③	CONNECTOR	MINI DP 20PIN MALE, THE PIN GOLD PLATED, WHITE INSULATION, GOLD PLATED SHELL	1	PCS
②	CONNECTOR	DP 20PIN MALE, PIN PLATED GOLD, BLACK INSULATION, GOLD PLATED SHELL	1	PCS
①	CABLE	(1/0. 20BC*1P+1/0. 20BC+FAM)*5C+1/0. 20BC*4C+AL+D(1/0. 20BC)+B(5*16/0. 12AL-MG), BLACK PVC JACKET, OD:4.8±0.2MM, MARKING: DisplayPort Cable E***** 兄 AWM STYLE 20276 80℃ 30V VW-1	L	MM
NO.	MATERIAL	DESCRIPTION	QTY.	UNIT

Ltemref	Quantity	Title/Name, designation, material, dimension etc			Article NO./Reference		
Designed by FLY	Checkde by HELEN	Approved by - date 2025. 10. 30	File name	Date 2025. 10. 30	Scale FREE		
ANGLE:				DP1.2 M-MINI DP M			
UNIT:MM				26-718X	Edition 1	Sheet 1/1	