


P/N	L/mm	T/mm
26-7193	2000	40

PIN OUT

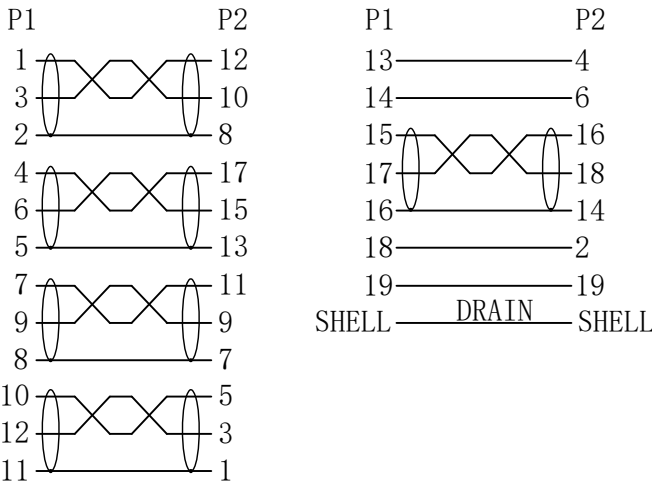

- NOTES:
- 1. OPEN/SHORT/INTERMITTENCE:100%.
 - 2. INSULATION RESISTANCE:DC 300V 0.01S 10MΩ Min
 - 3. CONDUCTIVE RESISTANCE:5Ω Max
 - 4. RESOLUTION:1920*1080P@60Hz
 - 5. RoHS & REACH COMPLIANT

⑧	DUST CAP	MINI DP MALE DUST CAP	1	PCS
⑦	DUST CAP	DP MALE DUST CAP	1	PCS
⑥	MOLDED	45P BLACK PVC		G
⑤	MOLDED	LDPE		G
④	THUMB SCREW	#40-40 B-L30.5 BLACK PVC	2	PCS
③	CONNECTOR	DVI (24+1) MALE, THE PIN GOLD PLATED, WHITE INSULATION, GOLD PLATED SHELL+IC:PS8121E	1	PCS
②	CONNECTOR	MINI DP 20PIN MALE, THE PIN GOLD PLATED, WHITE INSULATION, GOLD PLATED SHELL	1	PCS
①	CABLE	(7/0.08TC*1P+7/0.08TC+FAM)*5+7/0.08TC*5C+AL-FOIL+D(7/0.08TC)+B(80/0.12AL-MG), BLACK PVC JACKET, OD:5.0±0.2MM, MARKING: DisplayPort Cable E***** 兄 AWM STYLE 20276 80℃ 30V VW-1	L	MM
NO.	MATERIAL	DESCRIPTION	QTY.	UNIT

Itemref	Quantity	Title/Name, designation, material, dimension etc			Article NO./Reference		
Designed by FLY	Checkde by HELEN	Approved by - date 2025. 10. 30		File name	Date 2025. 10. 30		Scale FREE
ANGLE: 				MINI DP-DVI(24+1) M-M			
UNIT:MM				26-7193		Edition 1	Sheet 1/1