



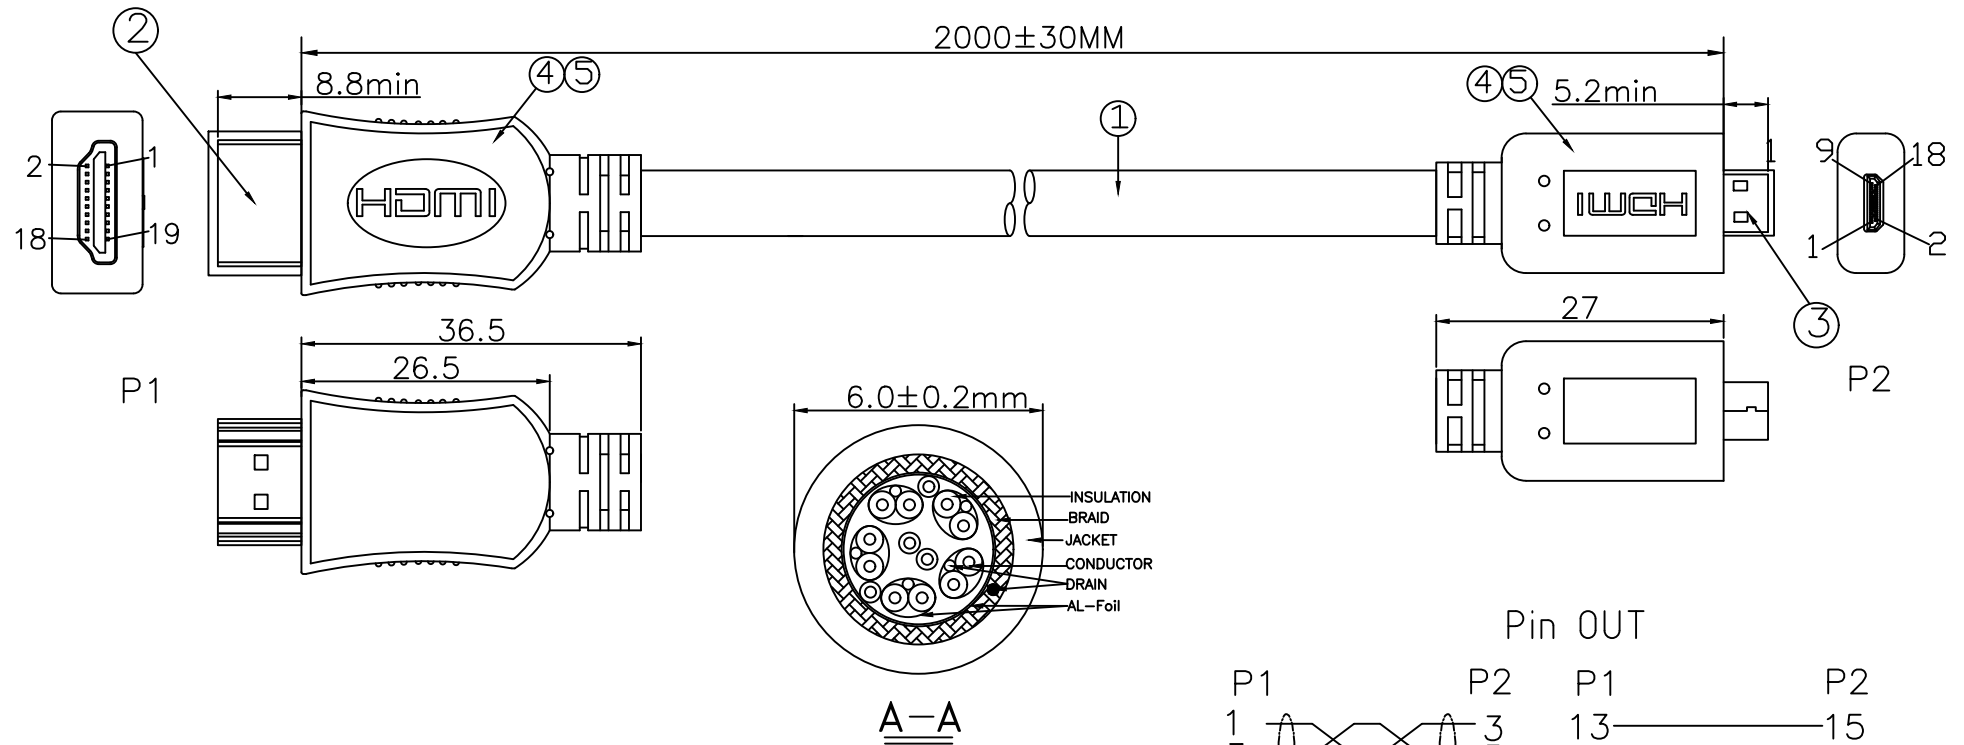

ELECTRONIC TEST:

- 1.OPEN/SHORT/INTERMITTENCE: 100%.
- 2.HI-POT: AC 150V 0.01S
- 3.INSULATION RESISTANCE:DC300V 0.01S 10MΩ(MIN)
- 4.CONDUCTIVE RESISTANCE:3 OHM (MAX)
- 5.Transmission rate:18G
- 6.HD-TV:4K*2K @60Hz

Pin OUT

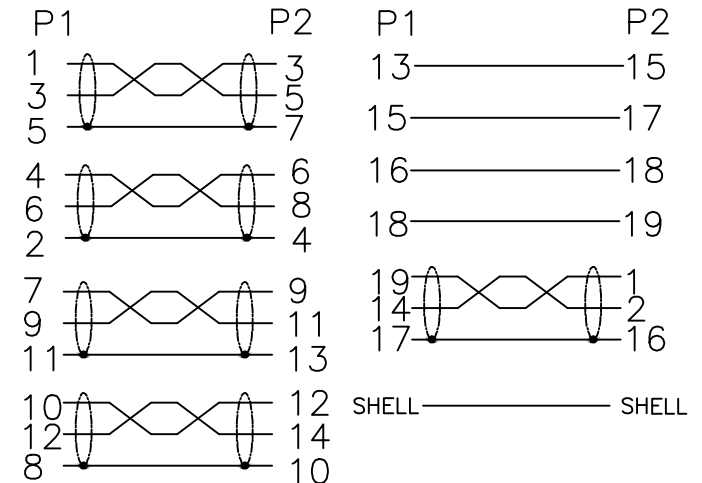

⑤	MOLDED	45P BLACK PVC		G
④	MOLDED	LD-PE		G
③	CONNECTOR	HDMI D Male Gold plated	1	PCS
②	CONNECTOR	HDMI A Male Gold plated	1	PCS
①	CABLE	(1/0.25*1P+1/0.25BC+AL)*5+1/0.25BC*4C+A+D(1/0.25BC)+B(80/0.12AL-MG) BLACK PVC OD:6.0±0.2MM PRINTING:High Speed HDMI® Cable with Ethernet	2000	MM
NO.	MATERIAL	DESCRIPTION	QTY.	UNIT

Ltemref	Quantity	Title/Name,designation,material,dimension etc			Article No./Reference	
Designed by ACHY	Checked by HELEN	Approved by - date 18-01-2019	File name	Date 18-01-2019	Scale FREE	
ANGLE: 			HDMI2.0 AM/DM 2.0M			
UNIT:MM			26-7197		Edition 1	Sheet 1/1