

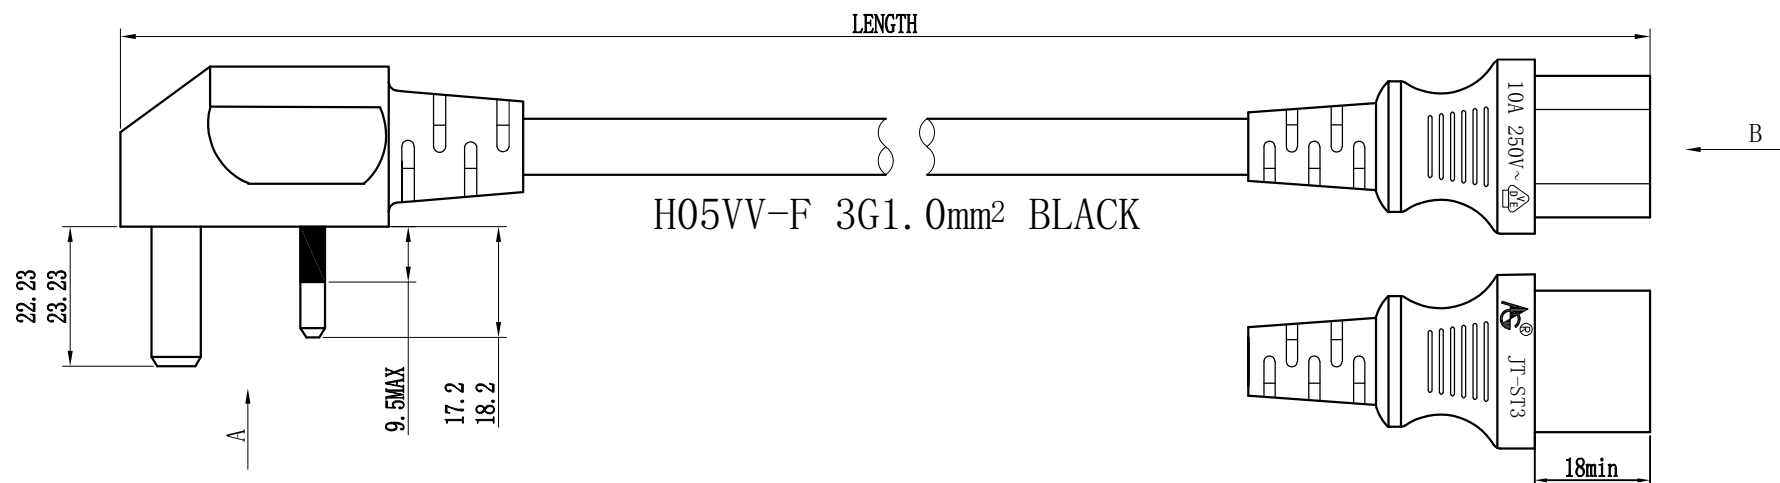


标 记	处 数	分 区	更 改	日 期

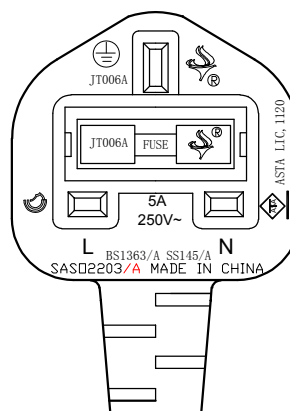


LOGO

A Direction

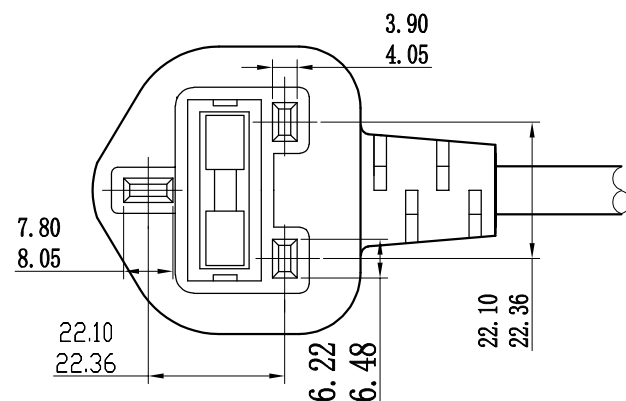

B Direction



NO.	27-0026B	COPPL0013	27-0103B
LENGTH (mm)	10000	3000	5000
COLOR	BLACK	BLACK	BLACK

1.Plug:JT006A/JT-ST3 Clear injection no scrath and dirt;

2. Cable: H05VV-F 3G1.0mm² Jacket $\phi 7.0 \pm 0.2$ Conductor 32* 0.198 ± 0.004 Core $\phi 2.5 \pm 0.1$

Cable Mark:  H05VV-F 3G1.0mm² 

3. Test: Hi-pot: Inner Voltage AC2500V/1S External Voltage AC4000V/1S
current leakage 1mA, insulation resistance no less than 5M Ω , no strike out;

第三角度投影 THE THIRD ANGLE PROJECTION 			第X张 共X张 mm	
图名 TITLE			比例 SCALE	
图号 FIGURE NO.			材料材料 REFIN MATERIALS	
校号 CHK NO.			校名字 SIGNATURE	
设计 DESIGN			产品名 PRODUCTOR NAME	
审核 CHECK			JT006A/JT-ST3	
批准 APPROVAL				