


NO.



标记	处数	分区	更改	日期

LENGTH

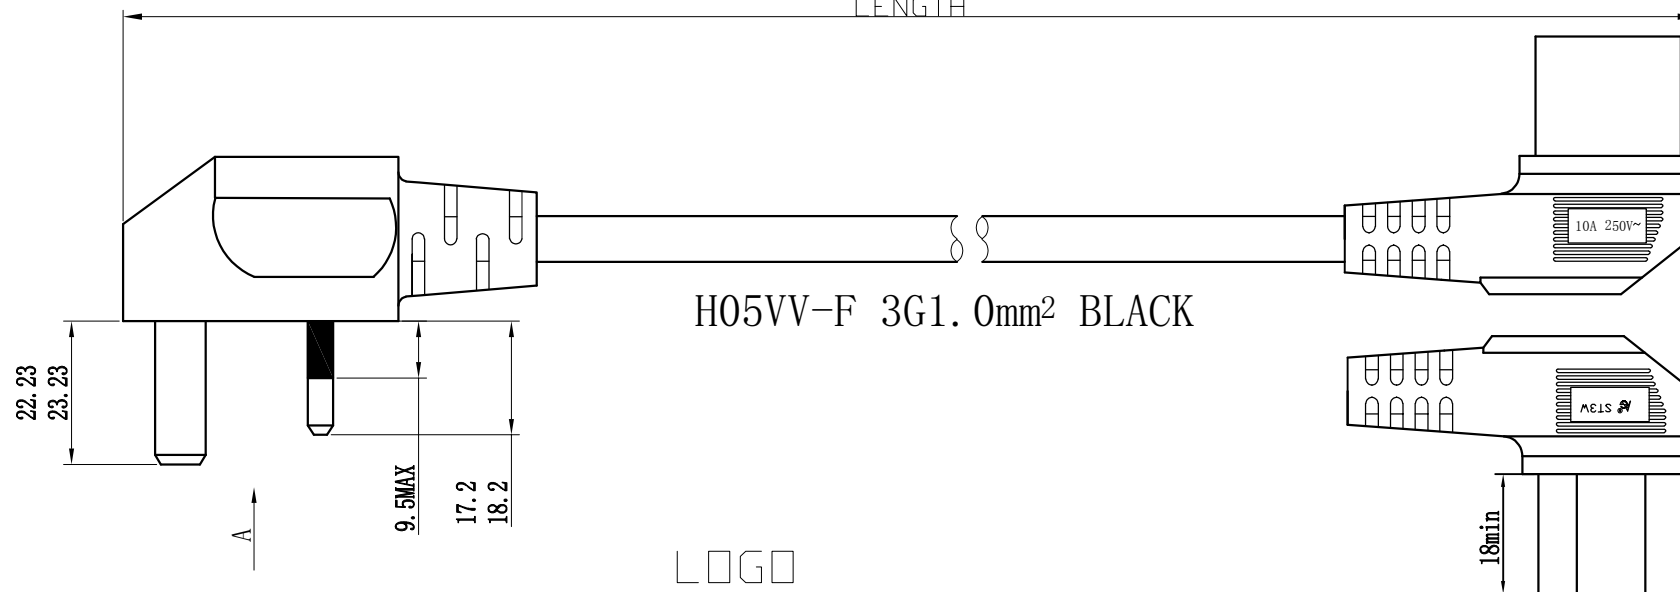


LOGO

A Direction

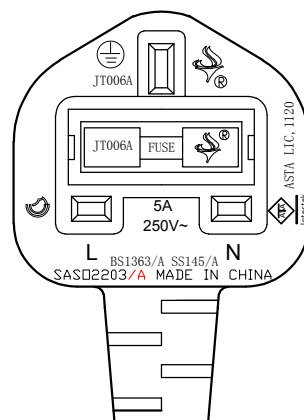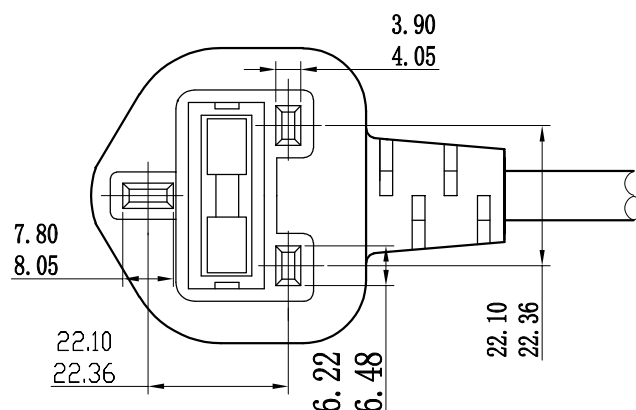

B Direction

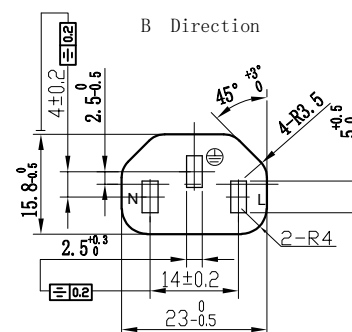

NO.	27-0101	27-0037	
LENGTH (mm)	5000	3000	5000
COLOR	BLACK	BLACK	BLACK

Notes:

- Plug: JT006A/ST3W Clear injection no scratch and dirt;
- Cable: H05VV-F 3G1.0mm² Jacket $\phi 7.0 \pm 0.2$ Conductor $32 \times 0.198 \pm 0.004$ Core $\phi 2.5 \pm 0.1$
Cable Mark: $\triangleleft VDE \triangleright$ H05VV-F 3G1.0mm²
- Test: Hi-pot: Inner Voltage AC2500V/1S External Voltage AC4000V/1S
current leakage 1mA, insulation resistance no less than 5M Ω , no strike out;

第三角度投影 THE THIRD ANGLE PROJECTION				第X张 共X张	
尺寸标注 DIMENSION	TOLERANCE	版本 VERSION	比例 PROPORTION	单位 UNIT	图框 MAPS
公差 TOLERANCE	公差 TOLERANCE	A	1:1	mm	A4
<200	±0.1	图号 FIGURE NO	材料材料 RESIN MATERIALS		
200~500	±0.3	图号 FIGURE NO	收 据 号 DRAWING		
500~800	±0.5	图号 FIGURE NO			
<800	±1.0	图号 FIGURE NO			
设计 DESIGN	产 品 名 称 PRODUCTOR NAME		JT006A/ST3W		
审核 AUDIT					
批准 APPROVAL					