
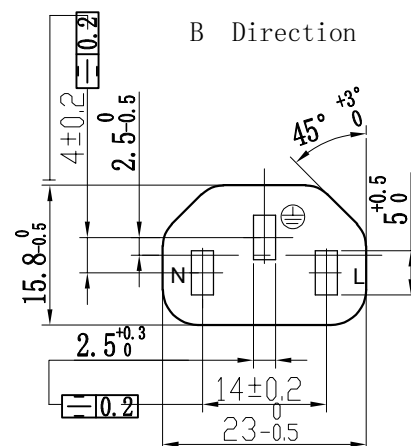
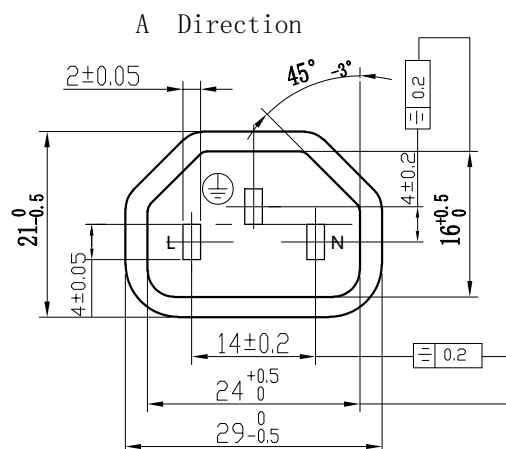


标 记	处 数	分 区	更 改	日 期

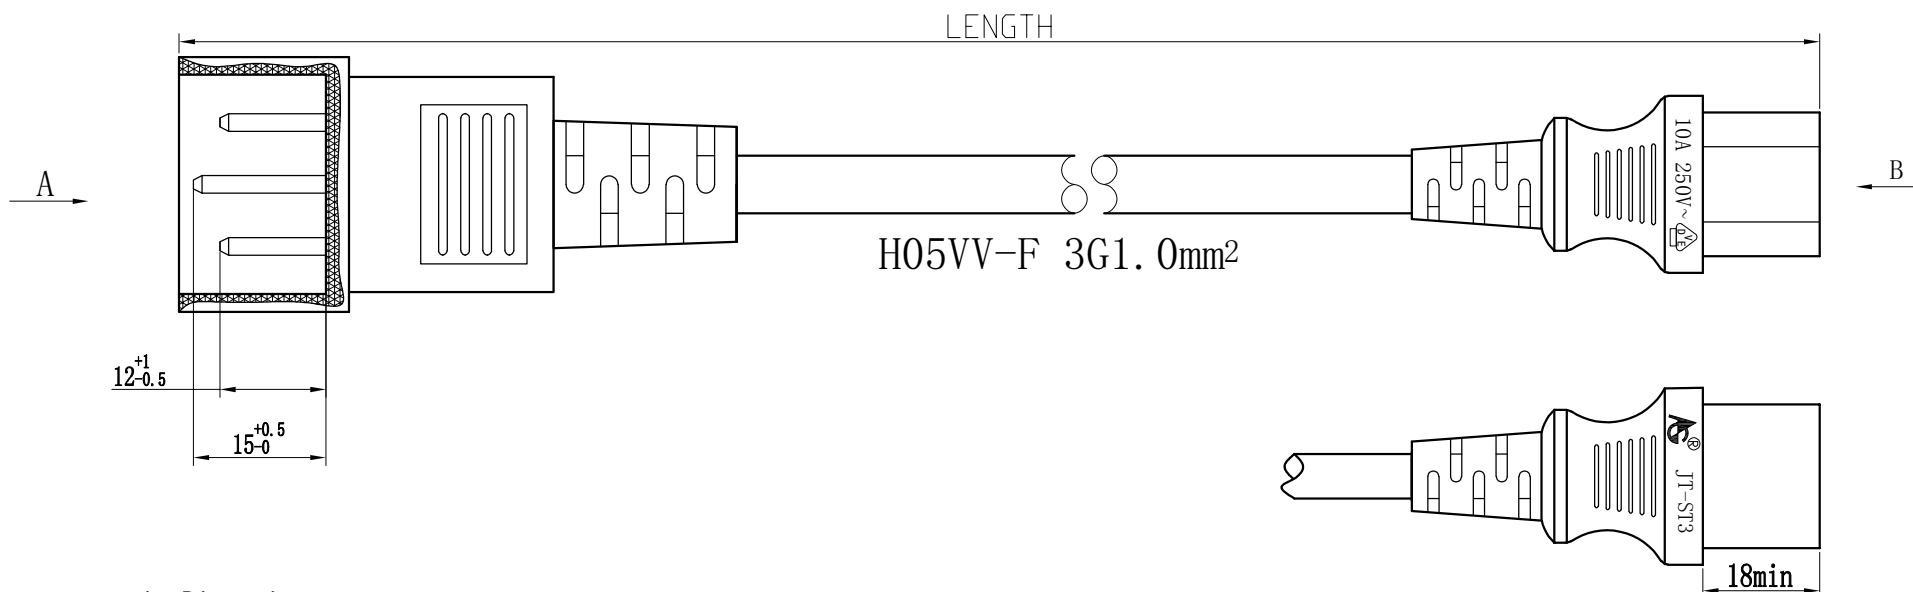

NO.	27-0007	27-0052B	27-0126
LENGTH (mm)	3000	10000	5000
COLOR	BLACK	BLACK	BLACK

- 1.Plug:JT-ST3/JT-SZ3 Clear injection no scrath and dirt;
- 2.Cable:H05VV-F 3G1.0mm² Jacket $\phi 7.0 \pm 0.1$ Conductor $32 \times 0.198 \pm 0.004$ Core $\phi 2.5 \pm 0.1$
Cable Mark: <VDE> H05VV-F 3G1.0mm² 
- 3.Test:Hi-pot:lnner Voltage AC2500V/1S External Voltage AC4000V/1S
current leakage 1mA,insulation resistance no less than 5M Ω ,no strike out;

第三角投影 THE THIRD ANGLE PROJECTION		 		第X张 共X张	
TOLERANCE ACCORDING TO THIS FORM, UNLESS OTHERWISE INDICATED		版本 VERSION	A	比例 PROPORTION	1:1
尺寸标注 DIMENSION	公差 TOLERANCE	公差范围 FILE DIMENSION	材料 MATERIAL		
<200	±0.1	±0.5°	树脂材料 RESIN MATERIALS		
200~500	±0.3		收 缩 率 SHRINKAGE		
500~800	±0.5				
<800	±1.0				
设计 DESIGN	产 品 名 称 PRODUCTOR NAME		JT-ST3/JT-SZ3		
审核 CHECK					
批准 APPROVAL					