

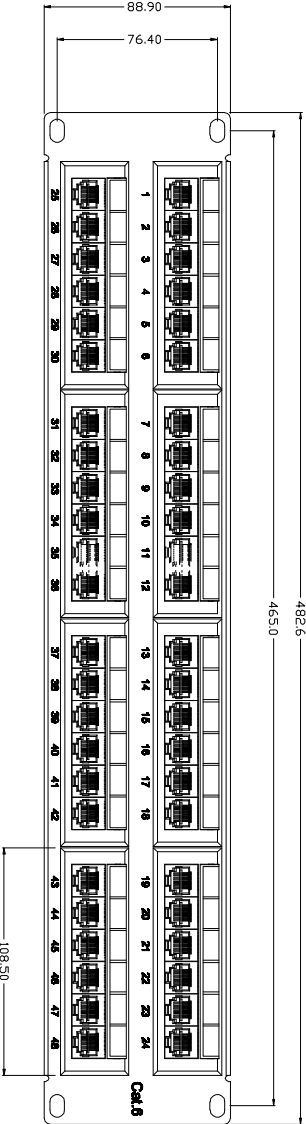


REVISION RECORD			
REV	ECD	DESCRIPTION	DRF T

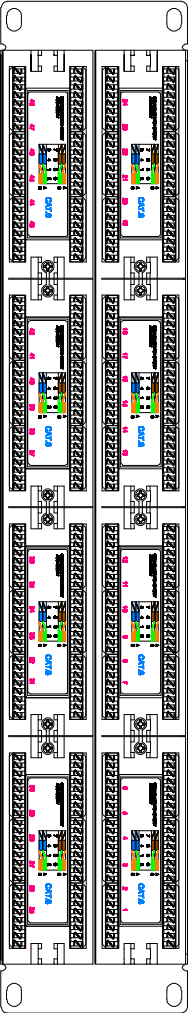

NOTES:

ELECTRICAL:

1. VOLTAGE RATING : 125 VAC RMS
2. CURRENT RATING : 1.5 AMP
3. CONTACT RESISTANCE : 100 MILLIOHMS MAX
4. INSULATION RESISTANCE : 1000 MEGOHMS MIN @ 500 VDC
5. DIELECTRIC STRENGTH : 750 VAC RMS 60Hz,1MIN
6. C6 PERMANENT LINK : CONFORM TO ANSI/TIA/EIA-568 B.2-1

ENVIRONMENTAL:

1. STORAGE : -40° TO +70°
 2. OPERATION : -10° TO +60°
- MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68

MECHANICAL:

- 1.HOUSING MATERIAL: PBT
- 2.PANEL FRAME : ST12,POWDER COATING IN BLACK COLOR
- 3.IDC MATERIAL : PC, TERMINAL:PHOSPHOR BRONZE,TIN PLATING
- 4.RJ45 JACK LIFE : 750 TIMES MIN
- 5.IDC LIFE : 200 TIMES MIN
- 6.WIRE : AWG 22~24
- 7.TIA Cat 6 Perm. Link Test: Worst pair NEXT margin $\geq$ 3.0dB
- 8.Retentiveness of insertion structure: 50N 60 $\pm$ 5s
9. ROHS & REACH Compliant

DETACHED LISTS			
	THIRD ANGLE PROJECTION	DRAWING NO.	DATE
			CHKD
			DATE
			DATE
			DATE
	THIRD ANGLE PROJECTION	DRAWING NO.	DATE
			CHKD
			DATE
			DATE
			DATE
	THIRD ANGLE PROJECTION	DRAWING NO.	DATE
			CHKD
			DATE
			DATE
			DATE
	THIRD ANGLE PROJECTION	DRAWING NO.	DATE
			CHKD
			DATE
			DATE
			DATE
	THIRD ANGLE PROJECTION	DRAWING NO.	DATE
			CHKD
			DATE
			DATE
			DATE
	THIRD ANGLE PROJECTION	DRAWING NO.	DATE
			CHKD
			DATE
			DATE
			DATE
	THIRD ANGLE PROJECTION	DRAWING NO.	DATE
			CHKD
			DATE
			DATE
			DATE
	THIRD ANGLE PROJECTION	DRAWING NO.	DATE
			CHKD
			DATE
			DATE
			DATE
	THIRD ANGLE PROJECTION	DRAWING NO.	DATE
			CHKD
			DATE
			DATE
			DATE
	THIRD ANGLE PROJECTION	DRAWING NO.	DATE
			CHKD
			DATE
			DATE
			DATE
	THIRD ANGLE PROJECTION	DRAWING NO.	DATE
			CHKD
			DATE
			DATE
			DATE
	THIRD ANGLE PROJECTION	DRAWING NO.	DATE
			CHKD
			DATE
			DATE
			DATE

TITLE
2U/48 Port Unshielded Cat6 Patch Panel