
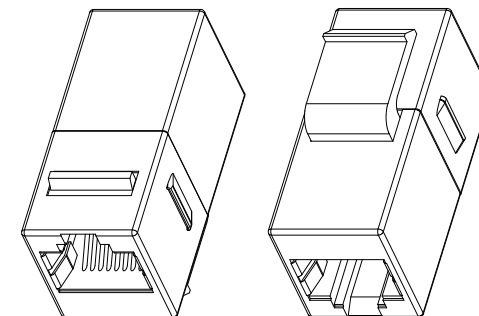


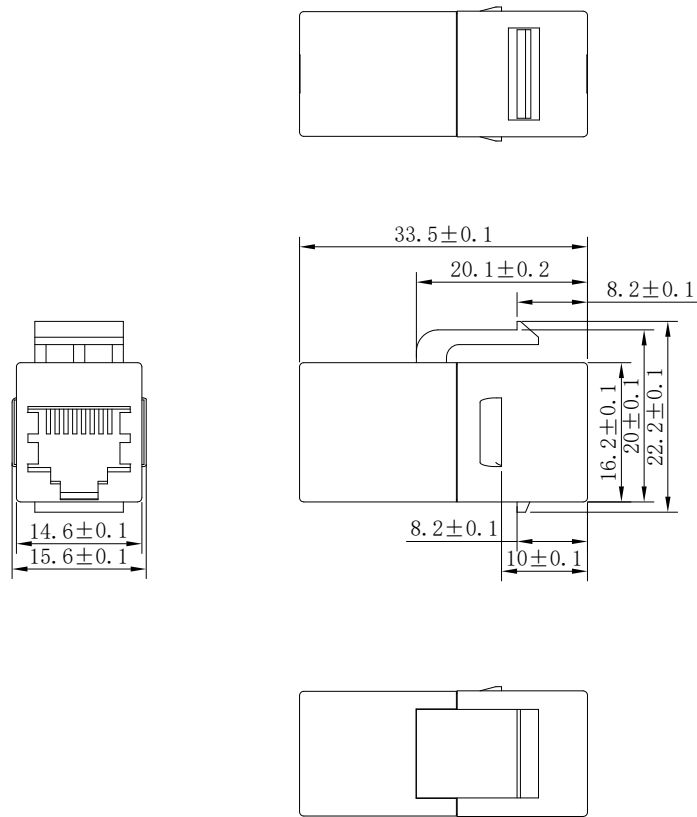

NOTES:

Material:

- 1.Shield;BRASS
2. Plastic Housing : ABS.
3. RJ45 contact material & finished:
 - 3-1.Phosphor Bronze with Nickel plated.
 - 3-2.Contact area : Gold plated.

Performance:

- A. Insertion Force: 900 gms for 8 contacts.
- B. Retention Strength: 7.7 kgs between Jack and Plug.
- C. Operation Temperature: -30° to 68° .
- D. Durability:

Jack: 750 cycles Plug-Jack mating and unmating test,

Insertion cycles at 20 cycles/minute max.

Contact resistance test per 100 cycles.

- E. The Cat.6 performance is in compliance with the ANSI/TIA/EIA 568 C standard.



Ltemref	Quantity	Title/Name, designation, material, dimension etc			Article NO./Reference		
Designed by FLY		Checkde by HELEN	Approved by - date 2026.01.07	File name	Date 2026.01.07	Scale FREE	
ANGLE: 					RJ45 Coupler		
UNIT:MM					CONETR026		Edition 1