

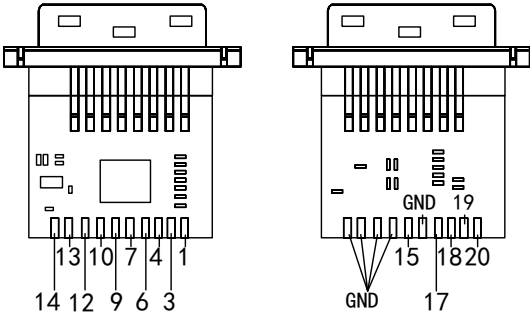


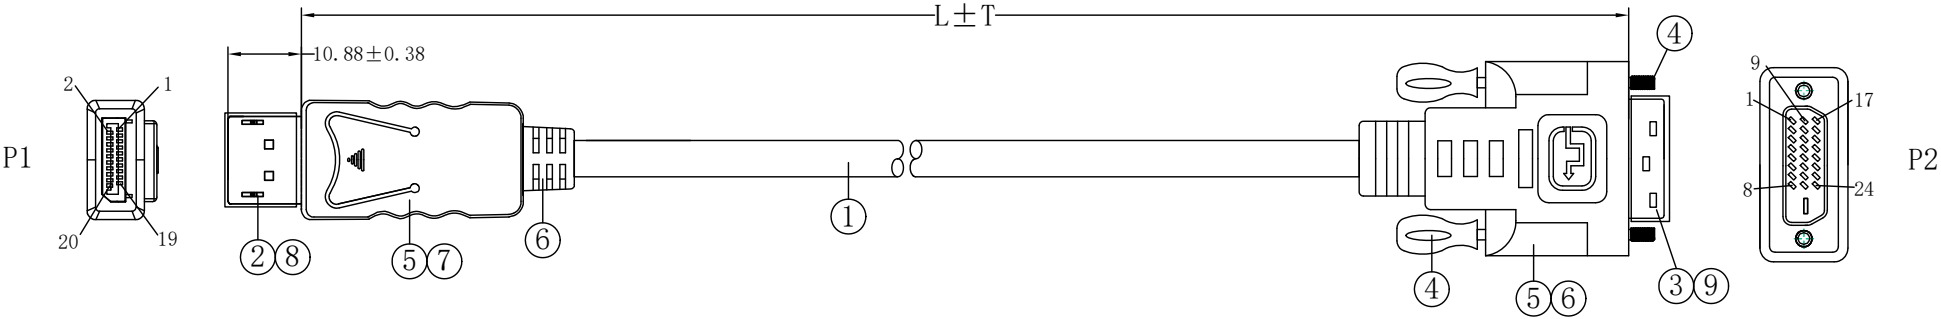

P/N	L/mm	T/mm
26-6120	2000	40
26-6130	3000	50

PIN OUT

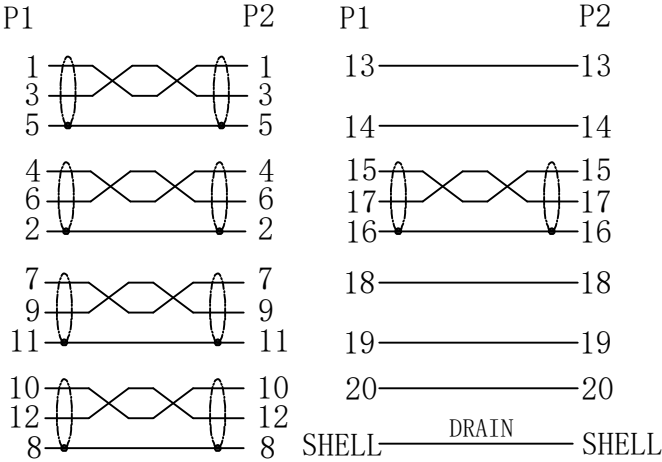

- NOTES:
- 1. RESOLUTION:1920*1080P@60Hz
 - 2. RoHS & REACH COMPLIANT

⑨	DUST CAP	DVI MALE DUST CAP	1	PCS
⑧	DUST CAP	DP MALE DUST CAP	1	PCS
⑦	PLASTIC HOOD	DP MALE BLACK PLASTIC HOOD	2	SET
⑥	MOLDED	45P BLACK PVC		G
⑤	MOLDED	LDPE		G
④	THUMB SCREW	#40-40 B-L38 PVC/BLACK	2	PCS
③	CONNECTOR	DVI (24+1) MALE, PIN PLATED GOLD, BLACK INSULATION, GOLD PLATED SHELL+IC:PS8121E	1	PCS
②	CONNECTOR	DP 20PIN MALE, PIN PLATED GOLD, BLACK INSULATION, GOLD PLATED SHELL	1	PCS
①	CABLE	[7/0. 10TC*1P+D(7/0. 10TC)+FAM]*5+7/0. 10TC*5C+AL-FOIL+D(1/0. 254BC)+B(80/0. 12AL-MG), BLACK PVC JACKET, OD:6.0±0.2MM, MARKING: DisplayPort Cable E***** 兄 AWM STYLE 20276 80℃ 30V VW-1	L	MM
NO.	MATERIAL	DESCRIPTION	QTY.	UNIT

Ltemref	Quantity	Title/Name, designation, material, dimension etc			Article NO./Reference		
Designed by FLY	Checkde by HELEN	Approved by - date 2025. 10. 29	File name	Date 2025. 10. 29	Scale FREE		
ANGLE: 			DP-DVI (24+1) M-M				
UNIT:MM			26-61X0		Edition 1	Sheet 1/1	